

Rotor Currents Command of The Doubly Fed Induction Generator Used in The Wind Energy

Abdelali AARIB, Abdelhadi EL MOUDDEN, Widad DRIOUICH, Angel SCIPIONI

Abstract—The command of the doubly fed induction generator by the rotor currents plays a key role in the control of the stator active and reactive powers, So the concept of the command rests on the precise control of the rotor currents closed-loop, the implementation of this command allows to check the doubly fed induction generator used in the wind energy with the possibility of working in a loop of power open to the exit of this command which is represented by the exit of the doubly fed induction generator (DFIG), Regulators PI used are simple and precise regulators, this type of control of the rotor currents closed-loop adjusts the sliding of DFIG what gives a good adjustment of the stator powers and rotor powers generated by the DFIG, the compensation of the terms of coupling is made by the synthesis of all the regulators PI used in the command. The role of these regulators PI is the control of the stator active and reactive powers and the compensation of the cyclic rotor inductance and the cyclic stator inductance.

Index Terms —Command, DFIG, grid, loads, Matlab-Simulink.

I. INTRODUCTION

Wind energy is an expanding energy, geographically spread and especially in seasonal correlation (the electrical energy is widely more asked in winter and it is often in this period when the wind's average speed is the highest).

Furthermore, it is an energy that does not produce greenhouse gases; it is however random in the time and its harnessing remains rather complex, requiring matt and blades of big dimensions (until 60m for wind turbines of several megawatts) in zones geographically of turbulences. Furthermore, it is an energy which produces no air emission or radioactive waste; she is however random at the time and her harnessing remains rather complex, requiring matt and blades of big dimensions (until 60m for wind turbines of several megawatts) in zones geographically of turbulences[1]. The installations can be realized on earth but also at sea where the presence of the wind is more regular. A wind turbine can convert the kinetic energy of the wind into electrical energy. Its various elements are designed to maximize this energy conversion; since the use of the windmill, the technology of the wind sensors has not stopped evolving[2]. It is at the beginning of the forties when real prototypes of wind turbines with profiled blades were successfully used to generate some electricity.

A wind turbine has to contain:

- A system which allows to check her electrically (electric machine associated with the command).
- A system which allows to control its mechanically (orientation of the landings of the wind turbine, the orientation of the nacelle).

The paper bellow deals with the wind turbine with the doubly fed induction generator, because it gets several characters as the adaptation has speeds of variable wind, the robustness of their command and the reduction of effort on the mechanical parts [3].

II. VECTORIAL COMMAND OF THE DOUBLY FED INDUCTION GENERATOR

The vectorial command is also field-oriented control, it's a separation between the command of the speed of the DFIG and the magnetic state stator-rotor.

Independently of the machine's speed, the couple changes the previous orientation and so the flow changes the previous orientation, but with the vectorial command the couple stays according to the direction in quadrature and the flow stays according to the direct direction [4].

The orientation of stator flow according to the axis allows to calculate the terms of coupling so the optimization of the power reactive stator and consequently the power factor of the wind system [5].

From the expression of these rotor flows, the equations of the rotor voltage could be deduced:

Because we are in three phases system, a tool to transform the tensions V_{rd} , V_{rq} in tensions V_{ra}, V_{rb}, V_{rc} of reference is needed, they will be injected in the converters of the power of the DFIG through these converters the machine absorbs the rotor energy, then, it produces the stator active power P_s , and the reactive stator power Q_s [6].

Abdelali AARIB, Laboratory of computing, Systems and Renewable Energy, ENSEM Casablanca / University Hassan II, Morocco
Abdelhadi EL MOUDDEN, Laboratory of computing, Systems and Renewable Energy, ENSEM Casablanca / University Hassan II, Morocco
Widad DRIOUICH, Laboratory of computing, Systems and Renewable Energy, ENSEM Casablanca / University Hassan II, Morocco
Angel SCIPIONI, Laboratory GREEN, University of Nancy Lorraine, France

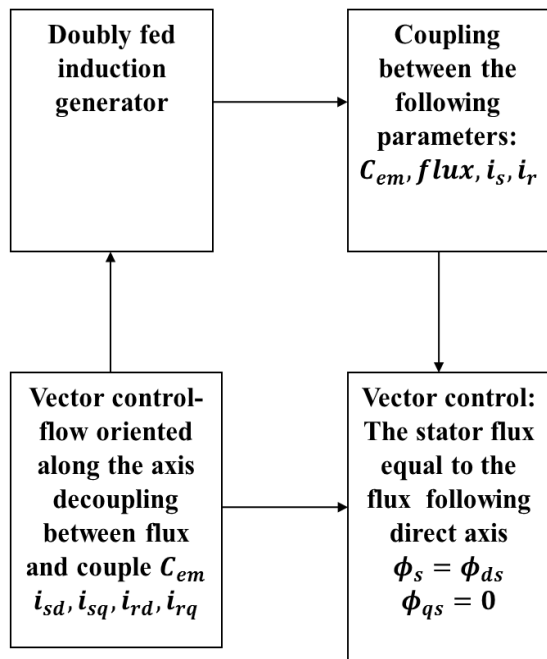


Fig.1 Vectorial command of the parameters of the DFIG.

III. MODULATION OF THE WIDTH OF THE IMPULSE

The modulation of the width of the impulse is realized by the comparison of a low-frequency modulated wave (reference tension) with a high-frequency expanding wave of triangular form [7].

The moments of switching are determined by the points' intersection between the carrier and the modulating.

In three-phases, three sinusoidal references disorientated of $\frac{2\pi}{3}$ with the same frequency f [8].

As at the exit of the inverter, the tension is not purely sinusoidal, thus it contains a harmonious, only responsible for parasites what engender additional losses. This PWM serves to solve these problems and it has the following advantages:

- As at the exit of the inverter, the tension is not purely sinusoidal, thus she contains harmonious, only responsible for parasites what engenders additional losses. This MLI serves to remedy these problems and it has the following advantages[9]:
- Variation of the frequency of the tension of the output
- Elimination of certain harmonious of tension

The reference tension V_{ra}, V_{rb}, V_{rc} will be modulated by a tension MLI this tension is called a carrier [10]:

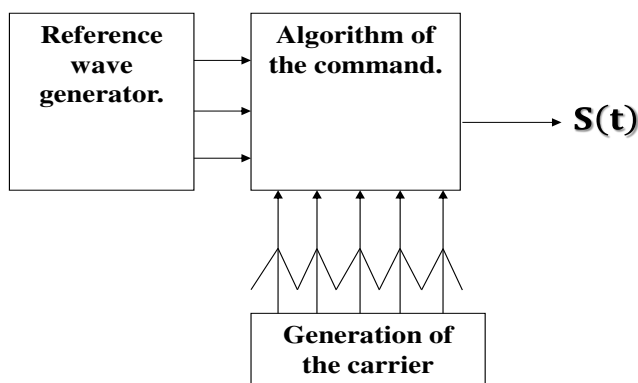


Fig.2 Plan of the modulation of width of impulse.

IV. DESCRIPTION OF THE CONVERTERS OF THE POWER OF THE DFIG

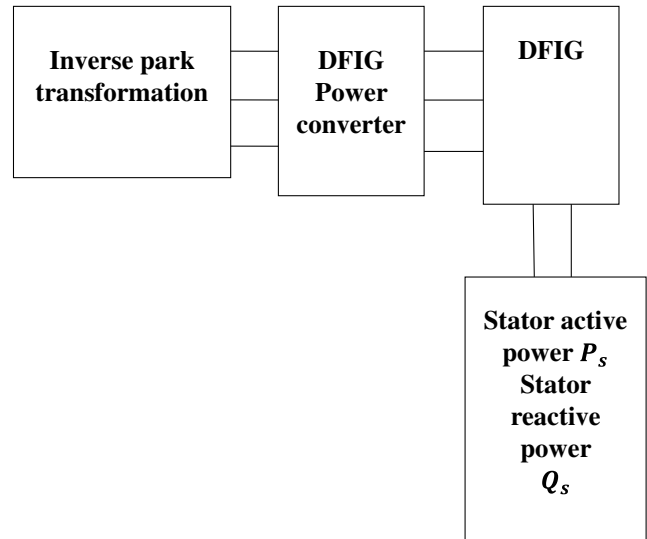


Fig.3 Plan of command of the converters of the DFIG (Matlab-Simulink).

The elaborated control considers the IGBT as switches in the case or the rotor tension of reference of the command is superior of the expanding tension, $V_{reference -rotor} > V_{porteuse}$ the switch is thus closed, the signal passes, in the case or the rotor tension of reference of the command is lower than the expanding tension $V_{reference -rotor} < V_{porteuse}$ the switch is opened, thus the signal is interrupted[11].




Fig.4 Signal modulated by the tension introduces into the converters of power.

The modulation of width of impulse to allow us to pass of a low frequency to a high one and to decrease the harmonious on the modulated signal, the importance of modulated signal is to have a signal without harmonious capable of commanding the signal in a precise way without having a disorder in the functioning of the IGBT and their frequency of switching so the modulated signal is more precise at the level of the passage of the IGBT of a state of switch open to a state of closed switch [12].

V. OPEN-LOOP, INDIRECT COMMAND OF THE SYSTEM

The open-loop command is essentially based on the hypothesis of a stable network in tension and in frequency. It consists on enslaving either the powers, but also the rotor currents by not using either the powers measured as return on the comparator, but the rotor currents of axis d and q . This configuration remains reliable as long as the electricity network remains stable in tension and in frequency[13].

This instability of the network is going to cause an error on the instructions of the active and reactive powers.

The open-loop command consists in overcoming either the powers, but also the rotor currents by using either the powers measured as return on the comparator but the rotor currents

ofaxis d and q. These currents play a key role in the command of the stator active and reactive powers [14].

VI. REALIZATION OF THE OBJECTIVE $Q_s = 0$ BY THE USED COMMAND

A wind turbine with a doubly fed induction generatoris used in Tangier's site.

The industrial problem of wind turbines is that it is very difficult to reach an almost Unitarian optimal power factor.The objective of the new command synthesized in this work is to return the value of the stator reactive power $Q_s = 0$ Var about is weather conditions [15].

➤ Analytical Demonstration of $Q_s = 0$ Var

Mathematically according to the vectorial command with oriented stator flow [16]:

$$Q_s = V_s \frac{\phi_s}{L_s} - V_s \frac{M}{L_s} i_{dr} \quad (1)$$

We have the stator flow becomes:

$$\phi_s = \phi_{ds} = L_s i_{ds} + M i_{dr} = \text{constante} \quad (2)$$

The stator tension according to the direct axis is equal has:

$$V_{ds} = R_s i_{ds} - \frac{d}{dt} \phi_{ds} + \omega_s \phi_{qs} \quad (3)$$

As:

$$\phi_{ds} = \text{constante and } \phi_{qs} = 0 \quad (4),(5)$$

Consequently:

$$V_{ds} = 0 \text{ and } V_{qs} = V_s \quad (6),(7)$$

$$V_{ds} = R_s i_{ds} \Rightarrow i_{ds} = \frac{V_{ds}}{R_s} = 0 \Rightarrow \phi_s = M i_{dr} \quad (8),(9),(10)$$

Therefore:

$$Q_s = 0 \text{ Var} \quad (11)$$

VII. RESULTS OF THE SIMULATION

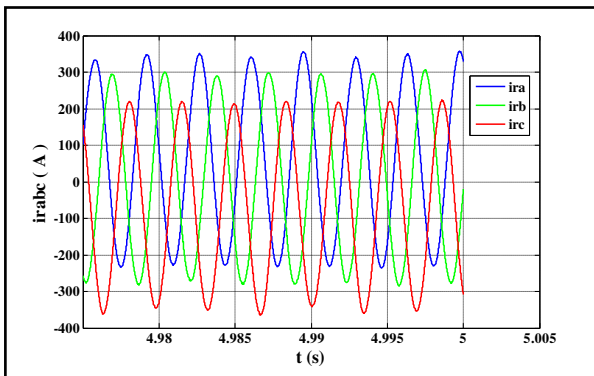


Fig. 5 Rotor current i_{ra} (A), i_{rb} (A), i_{rc} (A) according to time (s).

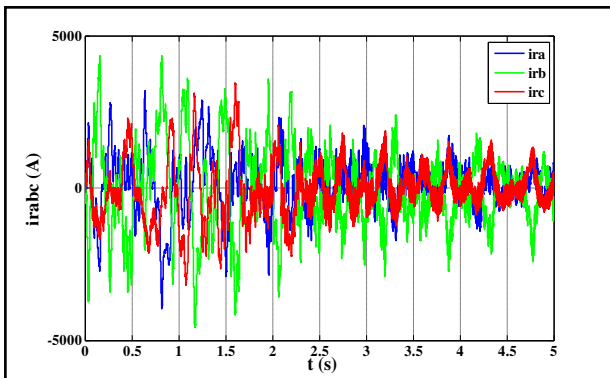


Fig.6 Rotor current i_{ra} (A), i_{rb} (A), i_{rc} (A) according to time (s).

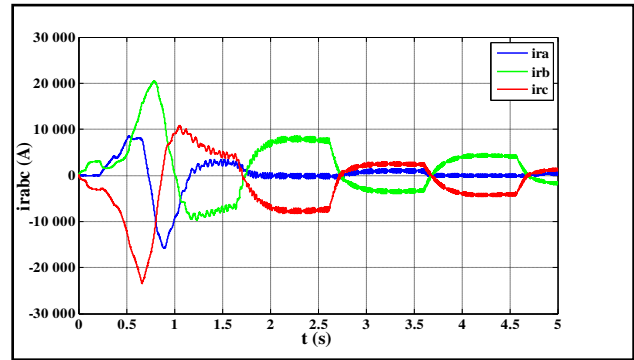


Fig. 7 Rotor current i_{ra} (A), i_{rb} (A), i_{rc} (A) according to time (s).

The rotor current is influenced by the variation of the reactive stator current absorbed by the DFIG, these currents i_{ra} (A), i_{rb} (A) and i_{rc} (A) vary approximately between -30000 A and 20000 A, and they are independent from the profile of wind speed. The rotor currents depend on the variation of the speed of asynchronous machine with double feeding, and on the variation of the sliding of the machine according to the absorption or the supply of the rotor power.

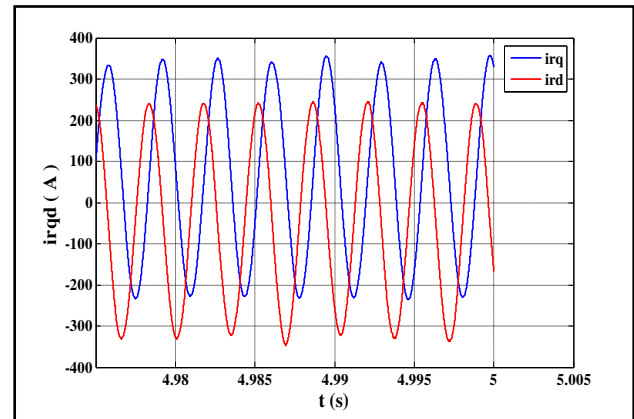


Fig. 8 Rotor current according to i_{rqd} (A) to time (s).

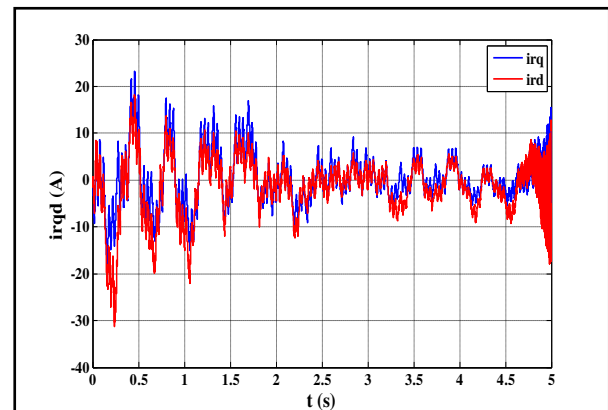


Fig. 9 Rotor current i_{rqd} (A) according to time (s).

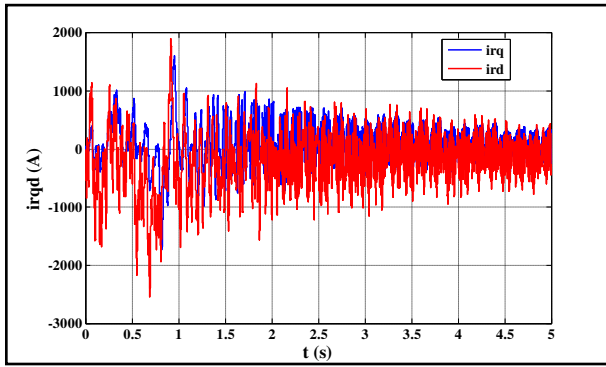


Fig. 10 Rotor current i_{rqd} (A) according to time (s).

These curves show the evolution of rotor currents; these wave forms depend on the speed of the wind. The frequency of rotor currents depends on the sliding of the machine. For a zero sliding (synchronous mode), the rotor currents are constant. By performing a zoom on the rotor currents, we notice a dephasing between the latter. This can be explained by providing and/or absorbing the rotor reactive power according to the dephasing. These rotor currents vary between (-35 A) and (2000 A).

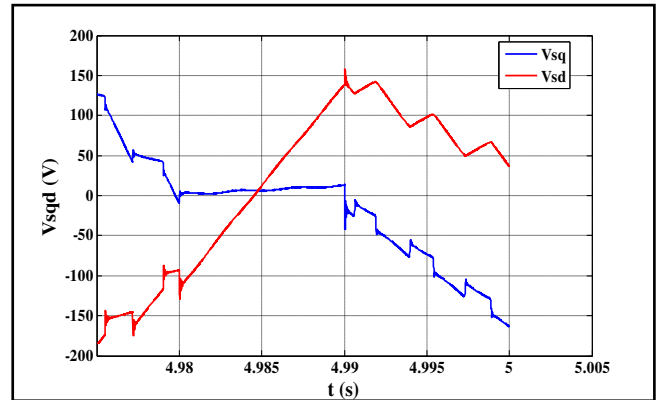


Fig. 13 Stator voltage V_{sq} (V), V_{sd} (V) according to time (s).

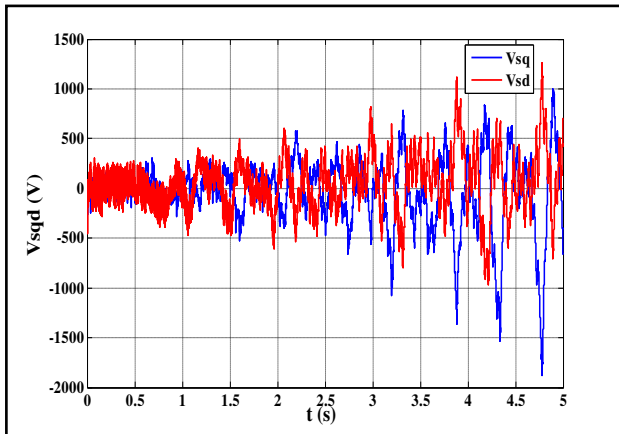


Fig. 11 Stator voltage V_{sq} (V), V_{sd} (V) according to time (s).

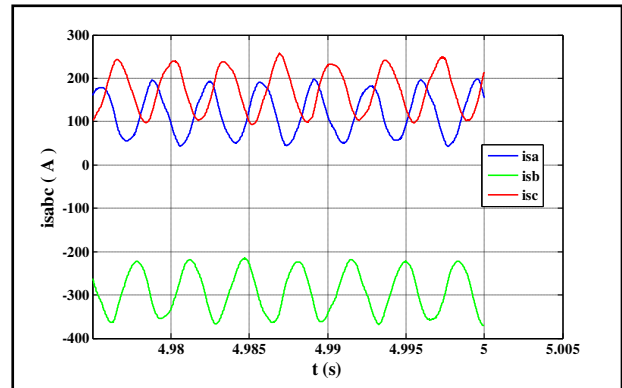


Fig. 14 Stator current i_{sabc} (A) according to time (s).

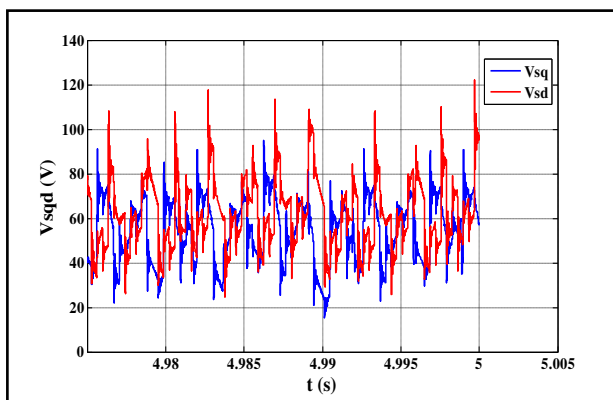


Fig. 12 Stator voltage V_{sq} (V), V_{sd} (V) according to time (s).

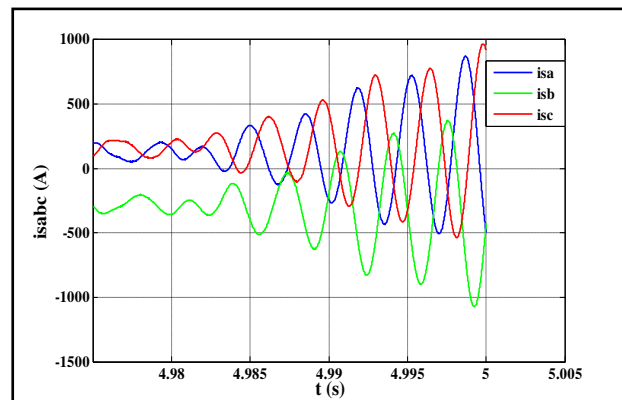


Fig. 15 Stator current i_{sabc} (A) according to time (s).

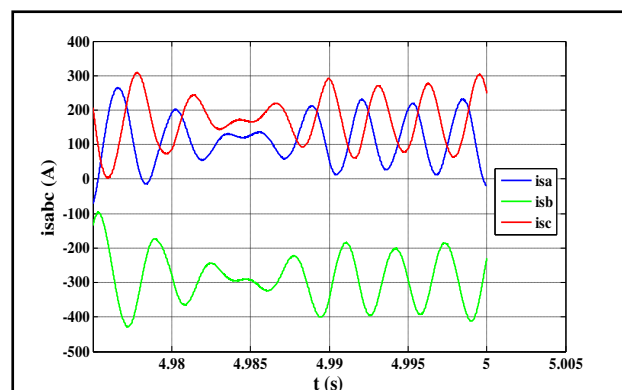


Fig. 16 Stator current i_{sabc} (A) according to time (s).

The form of the wave of stator currents is linked to that of the stator active power and of the stator reactive power. This

means that the stator active power is sent from the generator towards the grid. It is worth noting that the forms of the current are independent of the profile of the wind's speed. These curves vary in a sinusoidal way also there is some phase shift because of the constant of $\frac{2\pi}{3}$ which exists in the park's transformation, the value of these currents reached a maximum of (1000 A) and a minimum of (-420 A).

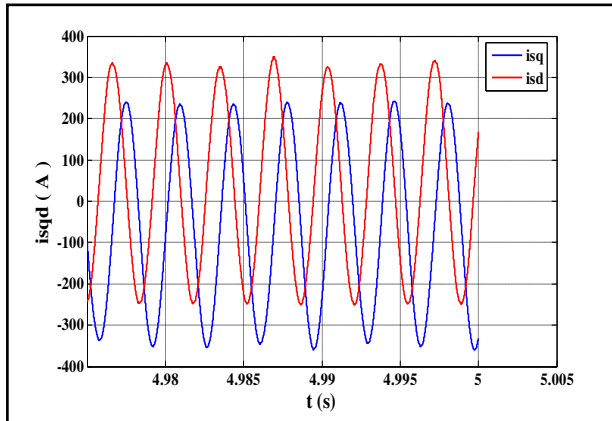


Fig. 17 Stator current i_{sq} (A), i_{sd} (A) according to time (s).

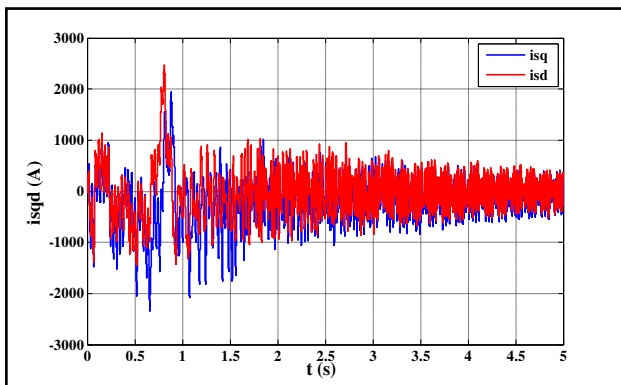


Fig. 18 Stator current i_{sq} (A), i_{sd} (A) according to time (s).

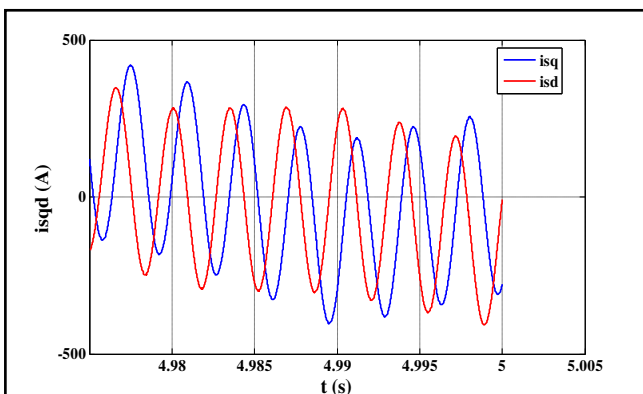


Fig. 19 Stator current i_{sq} (A), i_{sd} (A) according to time (s).

The stator currents depend on the variation of the stator active power and the stator reactive power of the machine. These forms of waves depend on the speed of the rotation of the machine as well as on the rotor power according to the absorption or the supply. These curves vary in a sinusoidal way, and the value of this curves reached (2400 A).

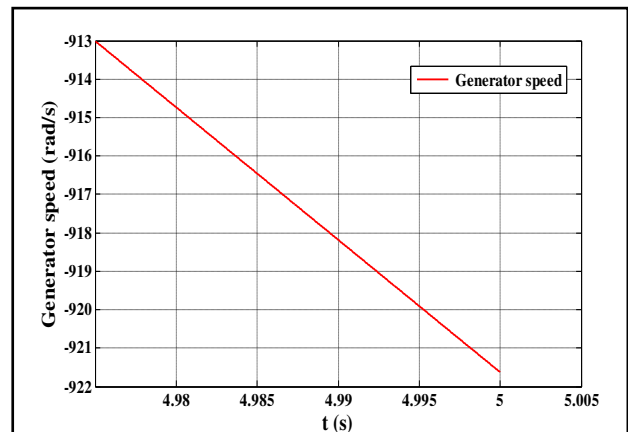


Fig. 20 Generator speed (rad/s) according to time (s).

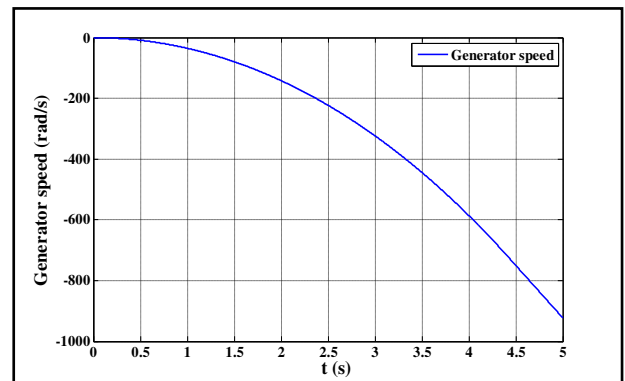


Fig. 21 Generator speed (rad/s) according to time (s).

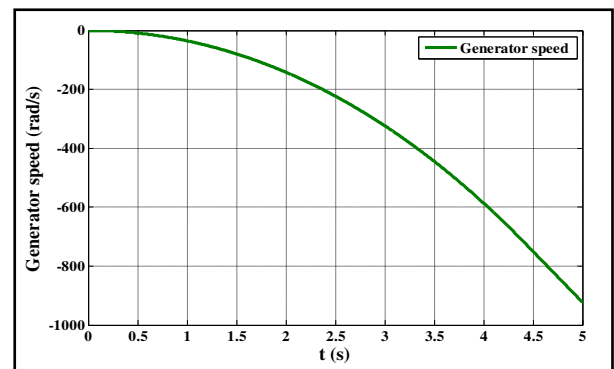


Fig. 22 Generator speed (rad/s) according to time (s).

The mechanical speed on the slow tree multiplied by the coefficient of multiplying leads to a rapid mechanical couple on the asynchronous machine, and then to the increase in the speed of its rotation. The generator speed varies between (-913 rad/s) and (-922 rad/s) which is adequate to a DFIG used in wind turbines.

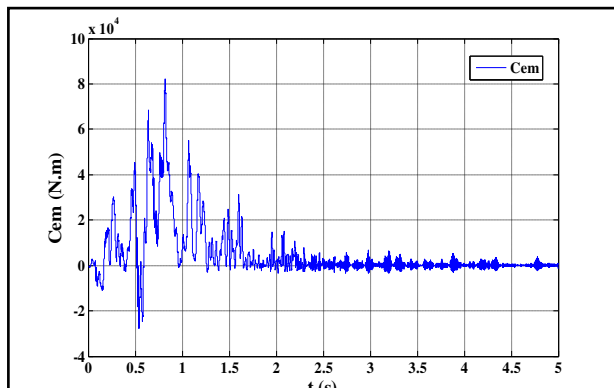


Fig. 23 Electromagnetic couple C_{em} (N.m) according to time (s).

The electromagnetic couple depends on the evolution of the stator flux ϕ_s (Wb), and on the rotor current i_{rq} (A). It is independent from the speed of wind. The value of this couple varies approximately between (-30000 N.m) and (+80000 N.m) in the beginning of the simulation and it becomes very adequate to the function of high power wind turbines in the end of the simulation, it fluctuates between 4.98 seconds and 4.99 seconds, and it depends from the stator inductance.

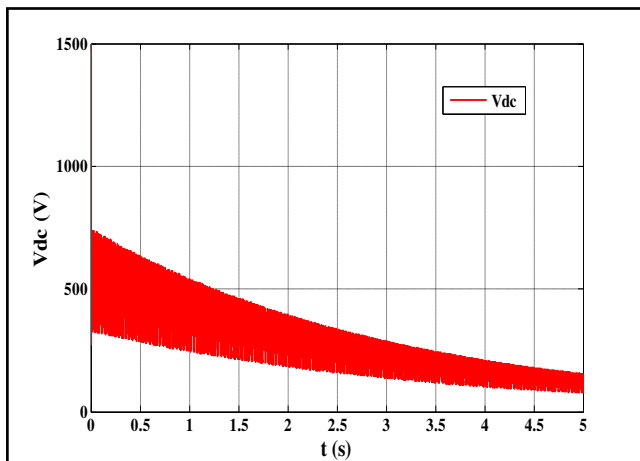


Fig. 24 Voltage of continuous bus V_{dc} (V) according to time (s).

The Voltage of continuous bus V_{dc} , which allows us to control the active power injected in the grid, it has a maximum of (1500 V), and a minimum of (90 V).

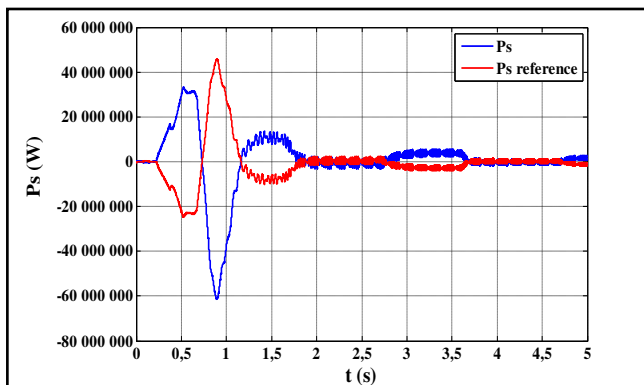


Fig. 25 Stator active powers P_s (W) according to time (s).

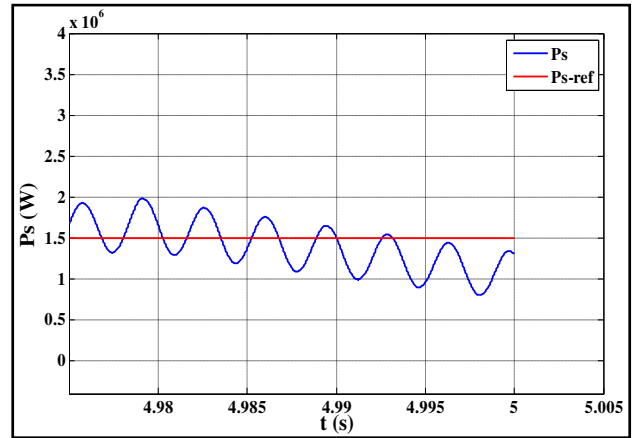


Fig. 26 Stator active powers P_s (W) according to time (s).

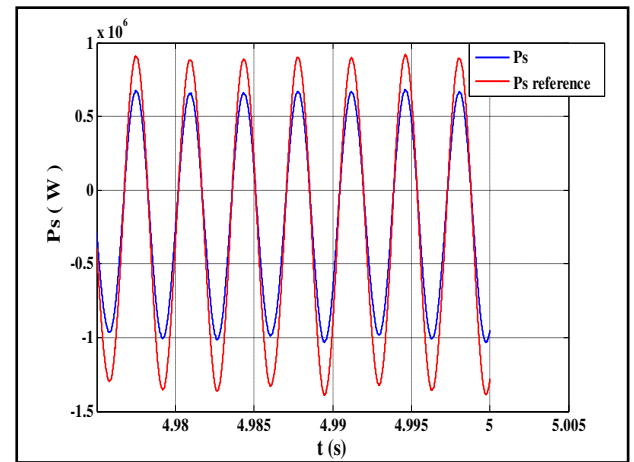


Fig. 27 Stator active powers P_s (W) according to time (s).

The active stator powers depends on the variation of the stator currents, of the machine and of the sliding of the machine, it varies between (-60 MW) and (40 MW). Which is adapted to high power wind turbine, the simulation time is 5 seconds.

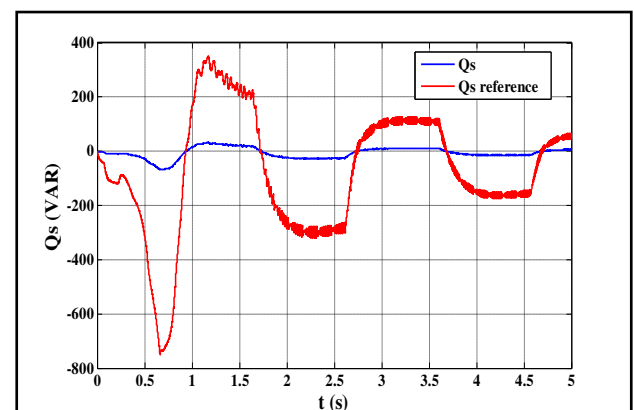


Fig. 28 Stator reactive powers Q_s (VAR) according to time (s).

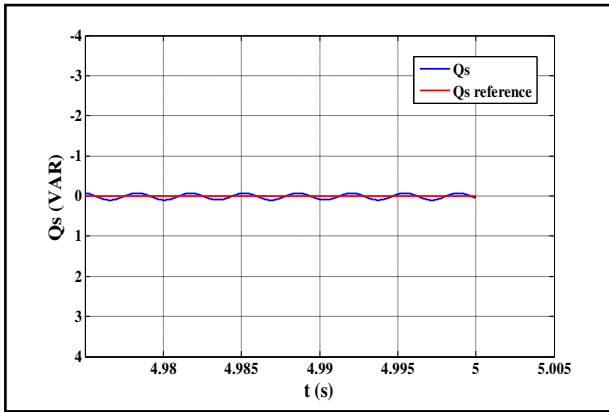


Fig. 29 Stator reactive powers Q_s (VAR) according to time (s).

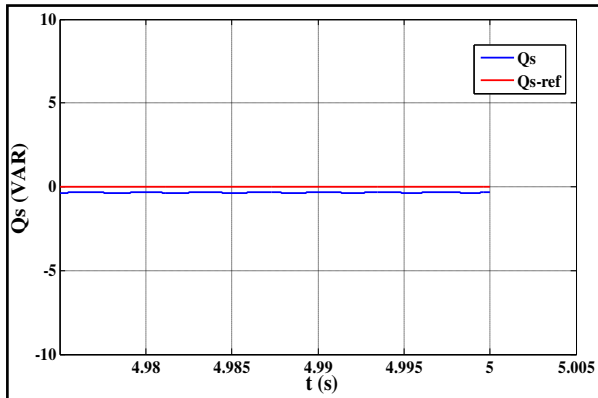


Fig. 30 Stator reactive powers Q_s (VAR) according to time (s).

These curves vary between (-700VAR) and (800VAR), which shows the robustness of the indirect command of the DFIG used in wind energy and it depends on the rotor current i_{dr} (A), it's not related to the profile of wind turbine, the simulation time is 5 seconds.

- P_s : Active power output from stator (W);
- Q_s : Reactive power output of stator (VAR);
- V_{dc} : DC link voltage (V);
- Φ_{ds} : The stator flux following axis d (Wb);
- Φ_{qs} : The stator flux following axis q (Wb);
- P : The number of pole pairs;
- L_m : Magnetizing inductance (H);
- L_s : Stator inductance (H);
- V_{ds} : The stator voltage following axis d (V);
- V_{qs} : The stator voltage following axis q (V);
- I_{dr} : The rotor current following axis d (A);
- I_{ds} : Stator current following axis d (A);
- ω_s : Stator pulsation (rad/s) ;
- V_{rd} : Rotor voltage following the direct axis (V);
- V_{rq} : Rotor voltage following the quadrature axis (V);
- Φ_s : Stator flux (Wb);
- V_s : Stator voltage (V) ;
- R_s : Stator resistance(Ω).

VIII. CONCLUSION

From the results obtained, we can conclude that the use of the indirect control in opened loop is well adapted for this kind of system. The behavior of the asynchronous machine with double feeding was studied, when the indirect open looped command of the DFIG is applied, and the indirect command in power remains the robust and suitable command

for a DFIG used in the wind energy. The algorithm based on a traditional (PI) controller can be used under every circumstance without variations on the control hardware of the actual wind generators [17]. The one based on an indirect opened control presents a better performance for trajectory tracking applications, with error minimization characteristics but with the need for more computational operations[18]. On the other hand, even if both algorithms present a correct dynamic performance in the developed tests, only the (PI) controller has really been implemented in a wind farm, It can be used to implement and develop various studies such as interaction of wind farm with an energy storage system [19], interaction of model with a solar system, applying protection system technology and developing new advanced control schemes, Considering the results it can be said that doubly fed induction generator proved to be more reliable and stable system when connected to grid side with the proper converter control systems [20]-[21].

ACKNOWLEDGEMENT

This article was produced in the Laboratory of Informatics, Systems and Renewable Energy (LISER), Team Analysis and Control of Electrical Energy Systems (ACSEE) - National School of Electricity and Mechanics Casablanca Morocco. First, we want to thank very much Mr. Abdelhadi EL MOUDDEN, our research director for giving us the opportunity to work under his direction, and finally, we thank all parents who are always supporting us.

REFERENCES

- [1] Abdelhadi EL MOUDDEN, Abdelali AARIB, Abdelhamid HMDAT: "Optimization of the robust control of the doubly-fed induction generator used in the centralized production of wind energy", The National School of Electricity and Mechanics (ENSEM), Casablanca, Morocco, July 2014.
- [2] Abdelhadi EL MOUDDEN, Abdelali AARIB, Aïcha WAHABI and Fatima Ezzahra BOUNIFLI: "Command of the active and reactive stator powers of the doubly-fed induction generator used in wind energy", The National School of Electricity and Mechanics (ENSEM), Casablanca, Morocco, October 2014.
- [3] A. El Moudden, A. Wahabi, A. Sandali, F. E. Bounifli "Modelling and simulation of a double-fed asynchronous generator for control of wind energy", International Congress of Thermal, Agadir, Maroc, April 2014.
- [4] Aïcha WAHABI, Abdelhadi EL MOUDDEN, Fatima Ezzahra BOUNIFLI, Abdelali AARIB" Improved performance of a wind energy conversion chain driven by an asynchronous generator doubly fed by a "RL" filter" The National School of Electricity and Mechanics (ENSEM), Casablanca, Morocco, June 2015.
- [5] Debiprasad P., Benedict E. L. Venkataramanan G. and Lipo T. A. "A Novel Control Strategy for the Rotor Side Control of a Doubly-Fed Induction Machine", Proceedings of Thirty-Sixth IAS Annual Meeting Conference IEEE, Vol.3, 30 Sep.-4 Oct. 2001, pp. 1695-1702.
- [6] V. Akhmatov and H. Krudsen, "Modelling of windmill induction generator in dynamic simulation programs," Proc. IEEE Int. Conference on Power Technology, Budapest, Hungary, paper No. 108. Aug 1999.
- [7] Sandy Smith, Rebecca Todd and Mike Barnes "Improved Energy Conversion for Doubly- Fed Wind Generators", Proceedings of IAS 2005, pp. 7803-9208, June 2005.
- [8] R. Pena, J. C. Clare and G. M. Asher, "Doubly fed induction generator using back-to-back PWM converts and its application to variable speed wind-energy generation," IEE Proceedings Electrical Power Application, Vol.143, pp. 231-241. 1996.
- [9] Lucian Mihet-Popa, FredeBlaabjerg, "Wind Turbine Generator Modeling and Simulation Where Rotational Speed is the Controlled Variable", IEEE Transactions on Industry Applications, Vol. 40.No.1, January/February 2004.

- [10] Mekkaoui Naima, "Contribution à la Modélisation et à la Commande d'une Mini-Centrale Eolienne à Base de Machines à Induction Simple et Double Alimentée", Mémoire de Magister université batna(Algérie), pp. 98, promotion 2004.
- [11] S. E. AIMANI, "Modélisation de différentes technologies d'éoliennes intégrées dans un réseau de moyenne tension", Thèse de Doctorat, École Centrale de Lille (France), 2004.
- [12] H. Akagi and H. Sato, "Control and performance of a doubly-fed induction machine Intended for a flywheel energy storage system", IEEE Trans. Power Electron., vol. 17, No. 1, pp. 109–116, Jan. 2002.
- [13] S. Muller, M. Deicke and W.DeDoncker, "Doubly fed induction generator systems for wind turbine," IEEE Industry Applications Magazine, Vol.3, pp. 26-33.2002.
- [14] M. H. Bollen, Understanding Power Quality Problems: Voltags Sags and Interruptions. Piscataway, NJ, USA: IEEE Press, 2002.
- [15] S. E. AIMANI, "Modélisation de différentes technologies d'éoliennes intégrées dans un réseau de moyenne tension", Thèse de Doctorat, École Centrale de Lille (France), 2004.
- [16] M. Bongiorno, "Control of voltage source converters for voltage dip mitigation in Shunt and series configuration", Chalmers University of Technology, Goteborg, Sweden, Licentiate Thesis 515L, Nov. 2004.
- [17] Carlsson, A. (1998). The back to back converter: control and design. Lund. Department of Industrial Electrical Engineering and Automation. Lund Institute of Technology.
- [18] J. Niiranen, "Voltage dip ride through of a doubly-fed generator equipped with an active crowbar", Proceedings of Nordic Wind Power Conference; March 2004.
- [19] Mohammad Rashed M.Altimania: "Modeling of doubly-fed induction generators connected to distribution system based on eMEGASim® real-time digital simulator", A Thesis Submitted to the Faculty of the University of Tennessee at Chattanooga in Partial Fulfillment of the Requirements of the Degree of Master of Engineering, May 2014.
- [20] W. Hofmann, F. Okafor, (2001): Doubly-Fed Full-Controlled Induction Wind Generator for Optimal Power Utilization. Proceeding of 4th IEEE International Conference on Power Engineering and Drive Systems, Vol. 1, pp. 355 – 361.
- [21] Matlab-Simulink.

Pr. Dr. Angel SCIPIONI is a research professor

He is a member of the Research Group Electrical and Electronics of Nancy (GREEN).His research activities focus on developing innovative energy solutions. He is alsoat the origin of the energy transition project on hydrogen "MHyRABEL"and he works on innovative measures processes based on wavelet observers. He assumes educational and industrial responsibilities within the Electrical Engineering and Industrial Computing department of IUT Henri Poincaré (Longwy, Université de Lorraine, France). He also ensures the sustainable development manager function of the site and of the DDER license.

AUTHOR'S PROFILE

Doctoral student: Abdelali Aarib

I am in the process of preparing a doctoral thesis in the National School of Electricity and Mechanics (ENSEM), University Hassan II Ain Chock, Casablanca, Morocco. Team Analysis and Command of Electrical Energy Systems (ACSEE) - Laboratory of Computing, Systems and Renewable Energy (LISER).On July 2011, I got a diploma on Master specialized in renewable energy and energy systems in the Faculty of Science Ain Chock, University Hassan II Casablanca, Morocco. My doctoral thesis discusses the optimization of the electrical energy produced by the double-fed asynchronous machine used in wind power. I presented four communications at scientific conferences. I attended several international scientific congresses.

Pr. Dr. Abdelhadi El Mouden

Doctor of Science from the National Polytechnic Institute of Toulouse (INPT) in 1993 - FRANCE. He is now a professor in the National School of Electricity and Mechanics (ENSEM), University Hassan II Ain Chock, Casablanca, Morocco.

Since 2006, he has been a member of Laboratory Computing, Systems and Renewable Energies (LISER), Research Group: Analysis and Control Systems of Electrical energy (ACSEE).

His research interests include Dynamic Simulations of Electric Machinery, Simulation and Optimization of Renewable Energy Systems. He has presented and published many articles in scientific journals and conferences (IEEE).

Doctoral student: Widad Driouich

I'm an Electrical Engineer, preparing my thesis on storage of electricity produced by renewable energies sources, at ENSEM; i'm a part of the Team Analysis and Command of Electrical Energy Systems (ACSEE) - Laboratory of Computing, Systems and Renewable Energy (LISER) teams.

In the past 6 Months, I had an internship in the GREEN Laboratory in Nancy, doing some works on the neuronal modeling of the Electrolyseur PEM.