ISSN: 2301-5690


INTERNATIONAL CONFERENCE



The Second International Conference on Engineering and Technology Development

2ªICETD 2013

27, 28, 29 August 2013, Bandar Lampung, Indonesia

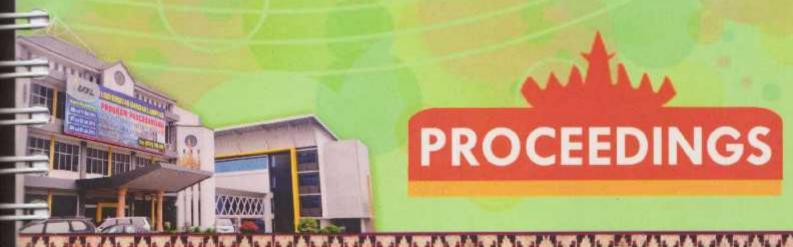













Hosted by:

Faculty of Engineering and Faculty of Computer Science, Bandar Lampung University (UBL), Indonesia

2ndICETD 2013

THE SECOND INTERNATIONAL CONFERENCE ON ENGINEERING AND TECHNOLOGY DEVELOPMENT

28 -30 January 2013 Bandar Lampung University (UBL) Lampung, Indonesia

PROCEEDINGS

Organized by:



Faculty of Computer Science and Faculty of Engineering Bandar Lampung University (UBL) Jl. Zainal Abidin Pagar Alam No.89 Labuhan Ratu, Bandar Lampung, Indonesia Phone: +62 721 36 666 25, Fax: +62 721 701 467

website: www.ubl.ac.id

2nd International Conference on Engineering and Technology Development (ICETD 2013) Universitas Bandar Lampung

Faculty of Engineering and Faculty of Computer Science

PREFACE

The Activities of the International Conference is in line and very appropriate with the vision and mission of Bandar Lampung University (UBL) to promote training and education as well as research in these areas.

On behalf of the Second International Conference on Engineering and Technology Development (2nd ICETD 2013) organizing committee, we are very pleased with the very good response especially from the keynote speaker and from the participans. It is noteworthy to point out that about 80 technical papers were received for this conference.

The participants of the conference come from many well known universities, among others: University Kebangsaan Malaysia - Malaysia, APTIKOM - Indonesia, Institut Teknologi sepuluh November – Indonesia, Surya Institute – Indonesia, International Islamic University - Malaysia, STMIK Mitra Lampung - lampung, Bandung Institut of Technology - Bandung, Lecture of The Malahayati University, B2TP - BPPT Researcher - lampung, Starch Technology Center - Lampung, Universitas Islam Indonesia – Indonesia, Politeknik Negeri Malang Malang, University of Kitakyushu – Japan, Gadjah Mada University – Indonesia, Universitas Malahayati – Lampung, Lampung University – lampung, Starch Technology Center - Lampung, Universitas Riau - Riau, Hasanuddin University -Indonesia, Diponegoro University – Indonesia, King Abdulaziz University – Saudi Arabia, Parahyangan Catholic University – Indonesia, National Taiwan University – Taiwan, Surakarta Christian University – Indonesia, Sugijapranata Catholic University – Indonesia, Semarang University – Indonesia, University of Brawijaya – Indonesia, PPKIA Tarakanita Rahmawati – Indonesia, Kyushu University, Fukuoka - Japan, Science and Technology Beijing - China, Institut Teknologi Sepuluh Nopember – Surabaya, Researcher of Starch Technology Center, Universitas Muhammadiyah Metro – Metro, National University of Malaysia – Malaysia.

I would like to express my deepest gratitude to the International Advisory Board members, sponsor and also to all keynote speakers and all participants. I am also gratefull to all organizing committee and all of the reviewers who contribute to the high standard of the conference. Also I would like to express my deepest gratitude to the Rector of Bandar Lampung University (UBL) who give us endless support to these activities, so that the conference can be administrated on time

Bandar Lampung, 29 August 2013-08-26

Mustofa Usman, Ph.D 2nd ICETD Chairman

PROCEEDINGS

2nd ICETD 2013

The Second International Conference On Engineering And Technology Development

28 -30 January 2013

INTERNATIONAL ADVISORY BOARD

Y. M Barusman, Indonesia Ahmad F. Ismail, Malaysia Mustofa Usman, Indonesia Moses L. Singgih, Indonesia Andreas Dress, Germany Faiz A.M Elfaki, Malaysia Warsono, Indonesia Raihan Othman, Malaysia Zeng Bing Zen, China Tjin Swee Chuan, Singapore Khomsahrial R, Indonesia Rony Purba, Indonesia Alex Tribuana S, Indonesia Hon Wei Leong, Singapore Imad Khamis, USA Rozlan Alias, Malaysia Rudi Irawan, Indonesia Gusri Ibrahim, Indonesia Jamal I Daoud, Malaysia Riza Muhida, Indonesia Heri Riyanto, Indonesia Agus Wahyudi, Indonesia Lilies Widojoko, Indonesia

PROCEEDINGS

2nd ICETD 2013

The Second International Conference On Engineering And Technology Development

28 - 30 January 2013

STEERING COMMITTEE

Executive Advisors

Dr. M. Yusuf S. Barusman Andala R. P. Barusman, MA.Ec

Chairman

Mustofa Usman, Ph.D

Co-Chairman

Dr. Ir. Hery Riyanto, MT Ahmad Cucus, S.Kom., M.Kom

Secretary

Marzuki, S.Kom., M.Kom Maria Shusanti Febrianti, S.Kom., M.Kom

Technical Committee

Indyah Kumoro, ST. IAI
Ardiansyah, ST., MT
Sofiah Islamiah, ST. MT
Taqwan Thamrin, ST., MSc
Dina Ika Wahyuningsih, S.Kom
Agus Sukoco, M.Kom
Hj. Susilowati, ST. MT
Haris Murwadi, ST, MT
Robby Yuli Endra, S.Kom., M.Kom
Fenty Ariani, S.Kom., M.Kom

Treasure

Samsul Bahri, SE Dian Agustina, SE

PROCEEDINGS

2nd ICETD 2013

The Second International Conference On Engineering And Technology Development

28 - 30 January 2013

ORGANIZING COMMITTEE

Chair Person

Dr. Ir. Hery Riyanto, MT

Vice Chair Person

Yuthsi Aprilinda, S.Kom., M.Kom

Treasure

Dian Agustina, S.E

Secretary

Aprizal, ST. MT Ir. Tjejeng Sofyan, MM Ir. Muhammad Zein, MT Ir. Bambang Pratowo, MT

Special Events

Ir. Juniardi, MT
Ir. Indra Surya, MT
Ir. Sugito, MT
DR. Baginda Simaibang, M.Ed
Berry Salatar, S.Pd
Yanuar Dwi Prasetyo, S.Pd.I., M.A

Receiptionist

Ir. Najamudin, MT Kunarto, ST. MT IB. Ilham Malik, ST. MT Ir.A Ikhsan Karim, MT Ir. Asikin, MT Usman Rizal, ST., M.MSi

Transportation and Acomodation

Irawati, SE Desi Puspita Sari, S.E Tanto Lailam, S.H 2nd International Conference on Engineering and Technology Development (ICETD 2013)
Universitas Bandar Lampung
Faculty of Engineering and Faculty of Computer Science

Ilyas Sadad, S.T., M.T

Publication and Documentation

Ir. Indriati Agustina Gultom, M.M Noning Verawati, S.Sos Hesti, S.H Rifandi Ritonga, SH Violita, S.I.Kom

Cosumption

Dra. Yulfriwini, M.T Wiwin Susanty, S.Kom., M.Kom Fenty Ariani, S.Kom., M.Kom Reni Nursyanti, S.Kom., M.Kom Erlangga, S.Kom Arnes Yuli Vandika, S.Kom

Facility and Decoration

Siti Rahma Wati,SE
Dina Ika Wahyuningsih, S.Kom
Zainal Abidin, SE
Ahyar Saleh, SE
Eko Suhardiyanto
Wagino
Sugimin

Table Of Content

Organizing Committee	
Keynote Speaker	
Recent Advances in Biofuel Cell and Emerging Hybrid System Abdul Aziz Ahmad and Raihan Othman	. 1
2. Waste Utilization Study Tailing Gold Mine in Way Linggo-Lampung, as Fin Aggregate Materials for Producing Mortar Materials based on concept of Green Technology Lilies Widojoko & Susilawati	en
3. Infrastructure Health Monitoring System (SHM) Development, a Necessity f Maintance and Investigation Prof. Dr. Priyo Suprobo, Faimun, Arie Febry	
4. Four Phases Quality Function Deployment (Qfd) By Considering Kano Conception Time And Manufacturing Cost Prof. Dr. Moses L Singgih, Dyah L. Trenggonowati, Putu D. Karningsih	

Speaker

1.	Comparative Analysis for The Multi Period Degree Minimum Spanning Tree Problem
	Wamiliana, Amanto, and Mustofa Usman
2.	Choosing The Right Software In Supporting The Successful of Enterprise ERP Implementation Yodhie Yuniarthe, Idris Asmuni
3.	Climate Adaptive Technology In Maintaining Vernacularism Of Urban Kampong Case study: KampungAdat (Indiginous) Mahmud, Bandung District,West Java Marcus Gartiwa
4.	The Prospect Of Diesohol In Facing Fossil Fuel Crissis M.C. Tri Atmodjo 63
5.	The Potential Of Agriculture And Forestry Biomass Wastes As Source Of Bioenergy Hardoyo 66
6.	The Importance of Education Facility as Sustainable Urban Generation Tool Fritz Akhmad Nuzir, Haris Murwadi and Bart Julien Dewancker
7.	The implementation of Secton Method for Solving Systems of Non Linear Equations Nur Rokhman
8.	Quality Control Analysis Into Decrease The Level Defects On Coffee Product Heri Wibowo, Sulastri and Emy Khikmawati
9.	Public Transportion Crisis In Bandar Lampung Ida Bagus Ilham Malik
10	Decompatial Analysis of Land Use Change in Way Kuripan Watershed, Bandar Lampung City Candra Hakim Van Rafi'il., Dyah Indriana Kusumastuti2., Dwi Jokowinarno
11	. Material Utilization Technology Of Agriculture And Forestry Waste Hardoyo
12	. The Supply Chain System Of Cassava On The Tapioca Industry Hardoyo
13	Glass Technology In Natural Light Glasses On Aperture Element In The Architecture World Muhammad Rija & MT Pedia Aldy

14. An Eksperimental Permeable Asphalt Pavement Using Local Material Domato Stone On Quality Of Porous Asphalt Firdaus Chairuddin, Wihardi Tjaronge, Muhammad Ramli, Johannes Patanduk 11
15. Coordination Of Architectural Concepts And Construction Systems Eddy Hermanto. 129
16. Seismic Assessment of RC Building Using Pushover Analysis Riza Ainul Hakim. 136
17. Viscosity and Liquidity Index Relation for Elucidating Mudflow Behavior Budijanto Widjaja and Shannon Hsien-Heng Lee. 143
18. The Use of Pozzolanic Material for Improving Quality of Strontium Liquid Waste Cementation in Saline Environment during Nuclear Waste Immobilization Process Muhammad Yusuf, HayuTyasUtami, Tri SulistiyoHariNugroho SusetyoHarioPutero
 Geospatial Analysis Of Land Use And Land Cover Changes For Discharge A Way Kualagaruntang Watershed In Bandar Lampung Fieni Yuniarti, Dyah Indriana K, Dwi Joko Winarno.
20. Wifi Network Design For High Performance Heru Nurwarsito, , KasyfulAmron, BektiWidyaningsih
21. Studi on The Efficiency Using Nature Materials in The Structural Elements o Reinforced Concrete Beam Yasser, Herman Parung, M. Wihardi Tjaronge, Rudy Djamaluddin 167
22. The Research Of Slow Release Nitrogen Fertilizer Applied In Sugarcand (Saccharum Officinarum) For Green Energy Bioethanol M.C. Tri Atmodjo, Agus Eko T. Nurul Rusdi, Sigit Setiadi, and Rina
23. Energy Utilization Technology Of Agriculture And Forestry Waste Hardoyo
24. Implementation Of Fuzzy Inference System With Tsukamoto Method For Study Programme Selection Fenty Ariani and Robby Yuli Endra. 189
25. The Analysis of Video Conference With ITU Standarization (Internationa Telecommunication Union) That Joining in Inherent At Bandar Lampung University Maria Shusanti F, Happy Reksa

 The E-internal audit iso 9001:2008 based on accreditation form assessmen matrix in study program for effectiveness of monitoring accreditation Marzuki, Maria Shusanti F
27. The Developing Of e-Consultations For Effectiveness of Mentoring Academy Ahmad Cucus, Endang K
28. The Evaluation of information system performance in higher education case study with EUCS model at bandar lampung university Reni Nursyanti, Erlangga. 22
29. The Analysis Of History Collection System Based On AndroidSmartphone With Qr Code Using Qr CodeCase Study: Museum Lampung Usman Rizal, Wiwin Susanty, Sutrisno.
30. Application of Complaint Handling by Approach Model of ISO 10002 : 2004 to Increase Complaint Services Agus Sukoco and Yuthsi Aprilinda. 23:
31. Towards Indonesian Cloud Campus Taqwan Thamrin, Iing Lukman, Dina Ika Wahyuningsih
32. Bridging Router to ADSL Modem for Stability Network Connection Arnes Yuli Vandika and Ruri Koesliandana. 25
 The Effect of Use Styrofoam for Flexural Characteristics of Reinforced Concrete Beams Yasser, Herman Parung, M. Wihardi Tjaronge, Rudy Djamaluddin 26
34. The Estimation Of Bioethanol Yield From Some Cassava Variety M.C. Tri Atmodjo
35. Effect of Superficial Velocity of Pressure Difference on The Separation of Oi And Water by Using The T-Pipe Junctionl Kms. Ridhuan and Indarto. 27
36. The use of CRM for Customer Management at Cellular Telecommunication Industry Ayu Kartika Puspa. 293
 Indonesian Puslit (Centre Of IT Solution) Website Analysis Using Webqual Fo Measuring Website Quality Maria Shusanti Febrianti and Nurhayati.
38. The E-internal audit iso 9001:2008 based on accreditation form assessmen matrix in study program for effectiveness of monitoring accreditation Marzuki, Maria Shusanti F

39. Enhancing Quality Software Through CMMI-ISO 9001:2008and ISO 9126 Agus Sukoco 320
40. Value Analysis Of Passenger Car Equivalent Motorcycle (Case Study Kartin Road Bandar Lampung) Juniardi, Aflah Efendi
41. Alternative Analysis Of Flood Control Downstream Of Way Sekampung River Sugito, Maulana Febramsyah
42. Analysis Of Fitness Facilities And Effective Use Of Crossing Road Juniardi, Edi Haryanto. 353
43. Study On Regional Development Work Environment Panjang Port Lands In Support Bandar Lampung City As A Service And Trade Ir. A. Karim Iksan, MT, Yohn Ferry
44. Analytical And Experimental Study Bamboo Beam Concrete Hery Riyanto, Sugito, Juli
45. Comparative Analysis Of Load Factor Method Static And Dynamic Method (Case Study Akdp Bus Route Rajabasa - Bakauheni) A. Ikhsan Karim, MT., Ahmad Zulkily
46. Optimization Utilization Of Water Resourcesdam Batutegi Using Method O Linear Program Aprizal, Hery Fitriyansyah
47. Characteristics Generation Traffic Patterns And Movement In Residential Area (Case Study Way Kandis Residential Bandar Lampung) Fery Hendi Jaya, Juniardi, 392
48. Use Study On Slight Beam Reinforced Concrete Floor Platein Lieu Of Scondary Beam Hery Riyanto, Sugito, Lilies Widodjoko, Sjamsu Iskandar
49. Observation Of The Effect Of Static Magnetic Field 0.1 Mt On A-Amylase Activity In Legume Germination Rochmah Agustrina, Tundjung T. Handayani, and Sumardi
50. Effectiveness Analysis Of Applications Netsupport School 10 Based Iso / Ieo 9126-4 Metrics Effectiveness Ahmad Cucus, Nelcy Novelia
51. Omparative Performance Analysis Of Banking For Implementing Interne Banking Reza Kurniawan 418

Faculty of Engineering and Faculty of Computer Science

COORDINATION of ARCHITECTURAL CONCEPTS and CONSTRUCTION SYSTEMS

Case Study:

The basic principles of building applications on Garuda II and sustainable development at the Dr.Kariadi-hospital in Semarang.


Eddy Hermanto.

(S3 Engineering Student of Architecture and Urban)

Abstract: This paper reported the implementation of coordination between architectural concept and construction system in the area of dr. Kariadi hospital, in Semarang central Java. In principle, the coordination in the design-construction process can achieve the benefits of development by improving the quality of technical design. The use of Tartan Grid concept closely related to the coordination module that integrates seamlessly blend with the application of the concept of green architecture and design quality indicator (dqi) in architectural design can improve the quality of technical design. Furthermore, the construction phase was green construction methods will improve the performance of related construction projects of sustainable keyword: minimizing waste and pollutants, and achieved self sufficient. Matters are very useful for the future utilization of the building through post-occupancy evaluation.

Keywords: system, tartan-grid, technology, sustainable development.

1. INTRODUCTION

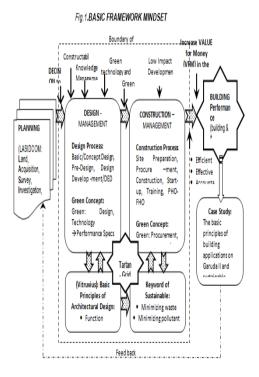

The study was conducted at area hospitals Dr.Kariadi, in Semarang, which is being carried out and the construction of several tall buildings on the other side there is a protected historic building (conservation) which functioned for the general administration of the hospital.

Construction industry, in principle, is a project development activities are constrained execution time, different characteristics of each project, taking place once completed, which consists of its phase process: planning (master plan, feasibility study), design / drafting (basic / concept, preliminary, engineering), detail procurement (procurement), construction / physical implementation, acceptance, operation and maintenance. Development of the construction industry has now reached Conventional. Rational industry especially in the scope of the use of technologies that are industrializing, then the goal as described above to be

Faculty of Engineering and Faculty of Computer Science

more of a challenge to be achieved so that the project which has one of the characteristics: large volume, technology, high risk, using a multi-year contract sides need consideration: efficient, effective and accountable. In this context, one of the things that led to the success of construction projects is through the establishment construction project organization partnering/alliance.Forms of partnering in principle follows the basic pattern and the shape of the relationship in Client-Designer-Contractor (CDC) (2,9).

The basic principle of the construction projects that have been put forward by: (1, 2), as the Iron Triangle consisting of the cost, time and quality, which is called the external triangle according to (9).The triangular relationship of the above to manage the three main components of project management: Time, Quality, Cost (TOC) as a success. Furthermore, the success of a construction project initially measured based TQC, but appropriate development now an element of customer satisfaction including (6). The success of achieving quality of building construction projects are very closely related to the application of quality management worth and worth doing at all stages of the project (7). In a construction project there are stages where the design and construction phases of these two stages together have a major influence and contribute to determine the process to achieve the final product-quality especially on technical sides.

If the sequence is summarized in the development process, the things mentioned above will consist of: preparation includes green technology applications; site development and green or circumstances existing land / sites, green design and human-construction bionomic. All of these items starting from the use of The Tartan-grid closely related to the coordination-module.

Now the green concept, in line with the global warming issue and the Millennium Development Goals (MDGs, especially the seventh point: ensure environmental sustainability, and eighth point: develop a global partnership for development) where the target based on the achievement of certain time-existence strengthens the role of architecture as science and art.

The concept of Tartan-column grid which is a blend of the interface and the distance of each column are the size dimensions of the corner column (20x20 CM2) and middle columns (10x10 CM2) are Necessary to support the roof providing a full freedom in moving the infill components. The Tartan-grid applications generate a regularity in the construction of buildings related to the architectural, structural, mechanical and outdoor design, electrical, space preparation of working space for the physical development of contractor activities, coordinating all of the modules in a system.

In the design process of the building needed a tool to define and evaluate the substance of the design (Design Quality Indicator / DQI). Operational applications based on sideby-side: the impact, build quality, and functionality. These three elements each have overlapping areas (as added value) and the third focal point is the overlapping area of excellence (3). Vitruvius on architecture principles in his book 'ten books in architecture', asserted his opinion that the basic principle should show as utility structure (the purpose and use), Firmitas (materials and construction) and Venustas (proportion and building scale).Matters of the has undergone significant changes building designers are faced with a variety of quality improvement requirements and constraints that must be met, for example: buildings are designed in harmony environment (green building) innovative (7).

Faculty of Engineering and Faculty of Computer Science

In principle, the system at this stage of the design process of a building characterized as buildings that are generated through: definition of scope, analyzed and formed into dimensional and has a specific nature. So in the process of construction of the building there is a design process that determines the success of the quality of the building. In the design process should be sufficient to control the performance of the main section. It continues to the end of the construction process so that the project goal is reached (5). Caused by the project team's performance does not meet the quality of the result in reworking (reworks) are many times that lead to exceeding the project schedule. This is a fundamental weakness of the building because the building the appearance aspect of the system was not achieved (10).

It is therefore very important and essential for any development of land in an area, especially in urban areas to prepare for the construction of the building and its environment in an efficient, effective and accountable as long as possible, by the use of environmentally friendly technologies.

2. METHODOLOGY

Identify the problem in this study: how the coordination of architectural concepts and construction system can run smoothly? Respondents consisted of project owners, project technical team, consultant designers, construction management consultant, Public Works Department of Human Settlements central Java, all of which carried an interview. The necessary data is primary data, taken directly from the sampling unit with equipment / tool with a list of questions / questionnaires.

The objectives of the study are to determine design of the developed area;

and to develop a model of system to achieve building performance.

3. RESULTS AND DISCUSSION

Numb cr	Stage of the Design Process	Stage of the Construction Process	Human Bionomic (OPERATIO N)
1	Basic/Concept Design: Grouping problem (Arditi and Gunsydin, 1997): STAKEHOLDER MANAGERIAL TECHNICAL EQUIDMENT/ENVIRONMENT AL CULTURAL/POLITICAL Application/Implementation: Conducted more detailed claboration of LASIDCOM: Land, Acquisition, Survey, Investigation, Design, Construction, Operation, Maintenance. MANAGEMENT (PARTNERING): DESIGN COLLABORATION TRUST OVEN COMMUNICATION RISK SHARING SUBSTANCES: KNOWLEDGE MANAGEMENT CONSTRUCTABILITY/B UILDABILITY QUALITY TECHNICAL DESIGN REGULATION	Site preparation: Design Review Create a timeline of project activities Budget implementation plan Project quality plan: materials, method of implementation, the technical requirements that must be met. Exploration of materials available in the market Project procurement plan: materials available in the market Project procurement plan: materials, equipments and tools, skilled labor and unskilled, working methods. Regulation/ordinan or survey Mobilization and demobilization and demobilization of equipment Preparation of skilled labor and unskilled Site preparation Construction method	Permission of th neighbothe od population project (Dutch language: Herordenin 8 Ordonantic) Building permit (MB) Environme ntal Impar Assessmen
		MANAGEMENT (PARTNERING): - Construction Partnering - Planning: Supply Chain Management (SCM) - Coordination, Monitoring, Evaluation, Controlling,	

Negań	Design Development: MANAGEMENT (PARTNERING): > COORDINATION, MONITORING, EVALUATION, CONTROLLING > DESIGN REVIEW > APPLICATION of the PRINCIPLE of DESIGN OPTIMIZATION and GREEN DESIGN, COORDINATION of DESIGN DOCUMENTS SUBSTANCES: + KNOWLEDGE MANAGEMENT + CONSTRUCTABILITY + BUILDABILITY + GUALITY TECRNICAL DESIGN + REGULATION Changes in design and on gincering, + REGULATION		o Handover of constructi on works; from PMC to FMO o warment of fancison, o manual book: hore to use; maintenan ce and upiccop of buildings, o As Buildings.
ve Impac t	Resease.	Construction performance is not achieved, Construction failure.	1 :



The Tartan Salo floor high Construction Design From the initial concept. Size concept. Size concept. Size concept. Size concept. Tartan Child concept. Size concept. Size concept. So the coordination medule is 800 cm. between columns aboves columns and a gazing between columns aboves columns aboves columns. So the coordination medule is 800 cm. between columns aboves columns activities for construction road width is 800 cm aboves columns activities for construction columns aboves columns aboves columns activities aboves columns activities columns activities aboves columns activities aboves columns activities aboves columns activ	÷			
Tartan Grid concept Tartan Cond concept Tartan Cond Condition Connecpt Tartan Condition Connecpt Size comer columns and the columns and the columns and the columns between columns between columns and passing between columns above columns and between columns and the columns above conditation of the column above columns and columns above colu	The Tartan	8-10 floor high	Construction	Open Space
Tartan Grid concept Tartan Cond concept Tartan Cond Condition Connecpt Tartan Condition Connecpt Size comer columns and the columns and the columns and the columns between columns between columns and passing between columns above columns and between columns and the columns above conditation of the column above columns and columns above colu	Grid	building design.	Activities	Design
concept Tartan Chid: Size comer columns and the columns and the columns between columns between columns between columns structure with soft the road (sight of way) is about the following is 800 cm. So the coordination medule is 800 cm. So the coordination columns structure with to were canne columns at source column is 800 cm. So the coordination medule is 800 cm. Distance between buildings alsoure that has applied cach size 800 cm. I is sufficient for the functioning of natural air movement, lighting the sakey for the side and rear of the two buildings and office building and office building that face contractors is a wear and landscaping. Praking at the building with the pattern of double loaded comdor where width of the road for two-way car traffic is sized 800cm, the size of a parking space is sued 800cm, the size of a parking space is sued 800cm, the size of a parking and there are three cars for every distance between them one owner, lavatory. 4 Construction road the columns and two constitution of the columns and the column	Šama das casca		† Tartan Grid	• Tartan Gridi
commer columns and the columns between columns of the columns of the columns of the columns and apacing between columns and apacing between columns attracture with columns attracture with tower crane columns attracture with the columns attracture with tower crane columns attracture with the columns attracture with tower crane columns attracture with the columns attracture with tower crane columns attracture with the columns attracture with tower crane columns attracture with the columns attracture with tower crane columns attracture with the columns attrac	;	concept: Size	concept: So the	concept: So the
solumn comer 30/20 CM2, the columns between columns and apacing of the column structure with solven columns 100 to CM2 and sparing between columns 200 cm. 30/10 CM2 and sparing between columns 300 cm. > Distance between columns and long sleeve from the functioning of natural air movement, lighting the sky for the side and rear of the two buildings and the sky for the side and rear of the two buildings with the building with the severe rand landscaping. > Parking at the building and office building and contractors is a two-storey infiltration wells (biopen, solve contractors is a two-storey infiltration wells loaded comider where width of the road 800cm, the size of pattern of double loaded comider where width of the road 800cm, the size of a parking space is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the fiber is 400cm the fiber is 3200x3200M2. **Road constitution to the fiber is 400cm the fiber is 3200x3200M2. **Road constitution to that the columns the fiber is 400cm the f		comer columns	coordination	coordination
between columns comer \$0/30 CM2 and spacing between columns and spacing of the column of the road (sight of way) is \$00 cm. \$0/10 CM2 and \$00 cm. \$0/10 CM2 and \$00 cm. \$0 Distance between columns is \$00 cm. \$0 Distance between columns of the tower crane the functioning of natural air movement, lighting the sky for the side and rear of the two buildings it that fines contractors is a contractor is a contractor is a contractor in a contract	!	and the columns	module is 800 cm.	module is 800
columns commer 80/80/CMZ of the columns between columns structure with structure with tower crane towers is 300 cm. > So the coordination medule is 300 cm. > Distance between between the tower crane the functioning of natural air movement, lighting the sky for the side and tower contractors is a cach size 600 contractors is a cach other, infiltration wells (biopen, bioretention). > Parking at the building with the pattern of double loaded comider where width of the road for two-way car traffic is sized 800 cm, the size of a parking space is 400 cm leng and there are three cash for every distance between columns. > Wide ramp connecting the floor is 400 cm the sound contractors of a parking space is between columns. > Wide ramp connecting the floor is 400 cm the floor is 400 cm the sound contractor of the column is 300 cm. \$0.100 cm the coordination to column is 300 cm. \$0.200 cm the coordination to column is 300 cm. \$0.200 cm the countractor is a contractor is a contrac		between column	The distance	cm.
between columns and against between columns attructure with store columns above column	1	comer 80/80CM2	between the edge	Distance
between columns 300 cm. So the coordination module is 300 cm. between belidings in 300 cm. be is sufficient for the functioning of natural air movement, lighting the sky for the side and rear of the two buildings that face contractors is sufficient wells (biopen, building at the building at the building with the pattern of double loaded comider where width of the mad for two-way car traffic is sized 300 cm, the size of a parking and there are three cars between there and for two-way car traffic is sized 300 cm, the size of a parking and there are three cars between the transport to perform activities; fart foor to perform activities; fart activities; fart foor to perform activities; fart foor to perform activities; fart activities; fart activities; fart foor to perform activities; fart activities;	,	, ,		effective width
So the coordination module is 800 cm Short sleeve and buildings is 300cm Short sleeve and the functioning of natural air mevement, lighting that face cach mile building and office	,		atructure with	of the road
Spacing between between buildings is 800 cm. > Distance between buildings is 800 cm. h is sufficient for the functioning of natural air movement, lighting that face building and and 2400 cm. h is sky for the side office building and and 2400 cm. h infiltration wells (biopen, south building at the building with the road for two-way car traffic is sized 800 cm, the size of a parking agace is 400 cm long and 800 cm, the size of a parking agace is 400 cm long and there are three cars for every distance between columns. > Wide ramp connecting the fiber is 400 cm the width of the ramp connecting the fiber is 400 cm the fiber is 400 cm. **Short sleeve and long allower cannot be tween contraction that has applied that the outdoor and contraction was and 2400 cm the width of the ramp connecting the fiber is 400 cm. **Short sleeve cannot be twee crans that two was size of a service and cannot be tween columns. **Short sleeve cannot be twee crans that two was and 2400 cm. his audition of the contractors is a width as 800 cm. **Short sleeve cannot that the twee crans the countered as the outdoor with two-storey including tents building tents building tents with two-storey. **Short sleeve cannot that the twee crans the countered as an contragency hospital implemented at beasic modula i				
between between the tower crane the functioning of natural air movement, lighting the sky for the side and rear of the two office building and office buildings that fine contractors is a two-story infiltration wells (biogeni, source and landscaping. > Parking at the building with the pattern of double loaded comider where width of the road for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the floor is 400cm the summer the floor is 400cm where the fl	1 :	l		
buildings is 300cm It is sufficient for the functioning of matural air movement, lighting the sky for the side and rear of the two building and office building and office building and office building and office building that face cach other, infiltration wells (leipen, 300x2400M2 bioextention), sewer and landscaping. > Parking at the building with the road for two-way car traffic is sixed 300cm, the sixe of a parking space is 400cm there are three cars for every distance between columns. > Wide ramp connecting the fibor is 400cm the width of the ramp connecting the fibor is 400cm the fibor is 400cm the fibor is 400cm the fibor is 400cm the fibor is 400cm. Wide ramp connecting the fibor is 400cm the fibor i	3.0			1
h is sufficient for the functioning of natural air movement, lighting the sky for the side and rear of the two buildings that face contractors is a basic module with the sullding and office building building tents with cach other, infiltration wells (leipen, source and landscaping. > Purking at the building with the building with the building with the building with the road for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cach between columns. > Wide ramp connecting the fiber is 400cm before is 400cm the fiber is 400cm and the fiber is 400cm	columns 100	l		()
the functioning of natural air movement, lighting air movement, lighting the sky for the side and 2400cm the sky for the side office building and office building and office building tents with office building tents with the pattern of double loaded comidate where width of the road for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance between columns. > Wide samp connecting the floor is 400cm the floor is 400cm where the distance for the areas of the samp connecting the floor is 400cm the floor is 400cm where the distance for the areas of the samp connecting the floor is 400cm the	ČM.			
natural air mevement, lighting the sky for the nide and rear of the two buildings that face for MULTI CREATE and and rear of the two buildings that face the contractors is a two-storery temporary; (singleranted at building tents buildings that face the contractors and landscaping. > Parking at the building with the pattern of double loaded comidor where width of the road for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance between relativities and there are three cars for every distance between relativity. > Wide ramp connecting the floor is 400cm the floor i				
mevement, lighting the sky for the side and rear of the two buildings that face cach cach other, filegoen, giogoen, giog	ll i			
the sky for the side and rear of the two buildings that face cach other, infiltration wells (hisperin, sewer and landscaping. > Purking at the building with the putilding with the road for two-way car traffic is sized a parking appace is 400cm long and 800cm, the size of a parking appace is 400cm long and 800cm, the size of there are three cars for every distance between columns. > Wide ramp connecting the fibor is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the fibor is 400cm the management with a size of a parking appace is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the fibor is 400cm the fibor to perform the fibor to perform the fibor to perform the fibor	I N			
SEING SEING buildings that face contractors is a contractory infiltration wells (biopen, 800x240M2 bioretention), sewer and landscaping. > Purking at the building with the pattern of double loaded comider where width of the road for two-way car traffic is sized 800x240x1 transparent; construction management consultants and \$000m, the size of a parking space is 4000m long and there are three cars for every distance between columns. > Wide ramp connecting the fibor is 4000m the width of the ramp connecting the fibor is 4000m the width of the ramp connecting the fibor is 4000m the width of the ramp connecting the fibor is 4000m the fibor is 4000m the width of the ramp connecting the fibor is 4000m the width of the ramp connecting the fibor is 4000m the fibor is 40				
buildings that face contractors is a two-storey infiltration wells (biopen), sower and landscaping. > Parking at the building with the pattern of double loaded comider where width of the road for two-way car traffic is sized 800em, the size of a parking space is 400em long and there are three cars for every distance between the state of a parking space is 400em long and there are three cars for every distance between columns. > Wide ramp connecting the floor is 400em the floor is 4				
so MULTION infiltration wells (biogoni, bioretention), sever and landscaping. > Parking at the building with the pattern of double loaded comider where width of the road for two-way car traffic is sized 800m, the size of a parking apace is 400m long and there are three cars for every distance between them 0.5 x800m. Street lighting columns to 800m, the size of a parking apace is 400m long and there are three cars for every distance between them 0.5 x800m. Street lighting columns to 800m tall. Design outdoor space can be consultants and there are three cars without roof 2x800x3200M2, where the distance for is 400cm tall. Wide amy connecting the floor is 400cm tall save and the save and the save and the floor is 400cm tall save and the save and		1		
SOLS and junction wells (biopen, bioextention), saver and landscaping. > Parking at the building with the pattern of double loaded comider where width of the mad for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance for every				
Sunction				
bioretention), sower and landscaping. > Parking at the building with the pattern of double loaded comider where width of the road for two-way ear traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance between columns. > Wide samp connecting the fibor is 400cm with of the rang connecting the fibor is 400cm where the distance for the amount of the samp connecting the fibor is 400cm where the distance for the amount of the samp connecting the fibor is 400cm. **Road construction** **Size of a between trees is 800M.** **Street lighting columns to 800cm tall.** **Draign outdoor space can be used as a multi-function out width is 800cm activity, fire example. brisking walking activities, cycling, had a mean size of 1600x3200M2. **The parking space is 1600x3200M2.** **The parking space is 1600x3200M2.** **The parking space is 2x800x3200M2.** **The parking space is 3x00x400cM2.** **The parking space is 3x00x40cM2.** **The parking space is 3x00x40cM2	SUNCTION			
sewer and landscaping. > Parking at the building with the pattern of double loaded comidor where width of the moad for two-way car traffic is sized 800cm, the size of a parking appace is a between three cars for every distance between the same for every distance between columns. > Wide many connecting the floor is 400cm. The width of the range connecting the floor is 400cm. The construction construction and technical team construction and technical team construction. The sound is 300cm to a 300cm tall. Distance between the extentivities of construction and sound is 300cm. The sound is 300cm to a 300cm tall. Distance to sound columns and sound is 300cm. Sound is 300cm. Sound is 300cm	Щ <u>і</u>	1)		
landscaping. > Parking at the building with the building with the building with the pattern of double loaded comider where width of the road for two-way car traffic is sized \$300cm, the size of a parking space is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the floor is 400cm the size of a between columns. > Wide ramp connecting the floor is 400cm the floor is 400cm and space for width of the ramp connecting the floor is 400cm. **Road construction road width is 300cm activity, fine example brinks walking activities, eyeling, had a mean size of 1600x3200M2. **Street lighting columns to 300cm tall. **Design outdoor space can be used as a multi-function activity, fine example brinks walking activities, eyeling, had a mean size of 1600x3200M2. **Street lighting columns to 300cm tall. **Design outdoor space can be used as a multi-function activity, fine example brinks walking activities, eyeling, had a mean size of 1600x3200M2. **Street lighting columns to 300cm tall. **Design outdoor space can be used as a multi-function activity, fine example. **Street lighting columns to 300cm tall. **Design outdoor space can be used as a multi-function activity, fine example. **Street lighting columns to 300cm tall. **Design outdoor space can be used as a multi-function activity, fine example. **Street lighting columns to 300cm tall. **Design outdoor space can be used as a multi-function activity, fine example. **Street lighting columns to 300cm tall. **Design outdoor space can be used as a multi-function activity, fine example. **Street lighting columns to anough and to the function activities. **Street lighting columns to 300cm. **Street lighting columns to activities. **Street ligh	1		for contractor	
> Parking at the building with the pattern of double loaded comider where width of the road for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the floor is 400cm with of the ramp connecting the floor is 400cm where the distance for the ramp connecting the floor is 400cm. **Road constitution to graft and a size of a parking space is 400cm long and there are three cars without roof connecting the floor is 400cm. The width of the ramp connecting the floor is 400cm. **Road constitution to do without roof connecting the floor is 400cm. The width of the ramp connecting the floor is 400cm. **Road constitution to do without roof connecting the floor is 400cm. The while operating heavy equipment in 3200x3200M2. **Road constitution to water the constitution activities. **Road constitution to a size of 1600x3200M2 and 1600x3200M2 are where the	11 /	landscaping.	activities; first	
building with the pattern of double loaded comfor where width of the road for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance for every distance between columns. > Wide ramp connecting the floor is 400cm the floor is 400cm the floor is 400cm where the distance for the many connecting the floor is 400cm where the distance for the many connecting the floor is 400cm where the distance for the many connecting the floor is 400cm where the distance for the many connecting the floor is 400cm where the distance for the many connecting the floor is 400cm where the distance for the many connecting the floor is 400cm where the distance for the many connections to the many connections to consultants and technical team owner, lavationy. Construction for consultants and technica		> Parking at the	floor to perform	
pattern of double loaded comider where width of the road for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the floor is 400cm the floor is 400cm is 3200x3200M2. Where the distance for the road with the space for width of the ramp connecting the floor is 400cm is 3200x3200M2. Where the distance for the road where the distance floor is 400cm is 3200x3200M2. **Road constitution columns.** **Power and space for which of the ramp connecting the floor is 400cm is 3200x3200M2. Where the distance floor is 400cm that the same activities for constitution activity, for example, brisk walking activities, eveling, had a mean size of 1600x3200M2. **Each parking space has three in 3200x3200M2.** **Road constitution constitution activity.** **Construction management team owners are supported as a multi-function activity, for example, brisk walking activities, eveling, had a mean size of 1600x3200M2.** **Each parking space is 400cm tall.** **Size of a mathematical team owner, lavatory.** **Construction road with its 800cm activity, for example, brisk walking activities, eveling, had a mean size of 1600x3200M2.** **Each parking space is 400cm activity.** **Construction road with its 800cm activity, for example, brisk walking activities, eveling, had a mean size of 1600x3200M2.** **Each parking activities for a space can be used as a multi-function activity.** **Construction road with its 800cm activity, for example, brisk walking activities, eveling, had a mean size of 1600x3200M2.** **Each parking activities.** **Construction road with its 800cm activity, for example, brisk walking activities, eveling, had a mean size of 1600x3200M2.** **Each parking activities.** **Construction road with its 800cm activity, for example, brisk walking activities, eveling, had a mean size of 1600x3200M2.** **Each parking activities.** **Construction road with a 800cm activity, for example, activities, eveling, ha		building with the	activities of	
loaded comider where width of the road for two-way car traffic is sized 800cm, the size of a parking apace is 400cm long and there are three cars for every distance for every distance between columns. > Wide ramp connecting the fibor is 400cm long and apace for width of the ramp connecting the fibor is 400cm lis 3200x3200M2. where the distance the road of the ramp connecting the fibor is 400cm lis 3200x3200M2. where the distance the road of the ramp connecting the fibor is 400cm lis 3200x3200M2. where the distance the road of the ramp connecting the fibor is 400cm lis 3200x3200M2. where the distance the road of the ramp connecting the fibor is 400cm lis 3200x3200M2. where the distance the constitution for the ramp connecting the fibor is 400cm lis 3200x3200M2.		pattern of double	meetings,	
where width of the road for two-way car traffic is sized a 800cm, the size of a parking appace is owner, lawatory. 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the finer is 400cm. The width of the ramp connecting the finer is 400cm. The width of the ramp connecting the finer is 400cm. The where the distance from the area of the ramp connecting the finer is 400cm. The width of the ramp connecting the finer is 400cm. The width of the ramp connecting the finer is 400cm. The width of the ramp connecting the finer is 400cm. The width of the ramp connecting the finer is 400cm. The where the distance the many connections are the ramp connection many connection the ramp connection that the ramp connection the ramp connection the ramp connection that the ramp connection the ramp connection that the ramp connection the ramp connection to the ramp connection that the ramp conne			activities for	
read for two-vay car traffic is sized 300cm, the size of a parking appace is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the finer is 400cm without roof connecting the finer is 400cm where the distance there is 400cm where the distance the areas and the areas and the cars to example to make walking activities, cycling, had a mean size of 1600x3200M2, the size of a between columns. > Wide ramp connecting the finer is 400cm the size of 1600x3200M2. The cars of a the cary of the cary connecting the finer is 400cm the size of 1600x3200M2. The cars of a the cary of the cary connecting the finer is 400cm the cary of the cary connecting the finer and solve the cary connecting the finer is 400cm without roof and size of 1600x3200M2. The cary of the cary connecting the finer is 400cm watch is 300cm activities, cycling, had a mean size of 1600x3200M2. Each parking space can be used as a multi- finetion activity, for example to exampl		l	construction	
solem, the size of a parking apace is downer the distance there are three cars for every distance between columns. > Wide ramp connecting the floor is 400cm. The width of the ramp connecting the floor is 400cm. The where the distance the same that the same connecting the floor is 400cm. The width of the ramp connecting the floor is 400cm. The where the distance the same connecting the floor is 400cm. The where the distance the same connections t			management	
a parking space is 400cm long and there are three cars for every distance between columns. > Wide ramp connecting the 2 x800x3200M2, file or is 400cm the great is 3200x3200M2. where the distance the great is 300x300M2. where the distance the great is 300x300M2. The great is 400cm to a 300x300M2. Where the distance the great is 300x300M2. The great is 400cm to a 400x300M2. The great		l		
400em long and there are three cars for every distance for every distance letter and between columns. > Wide ramp connecting the filter is 400cm the filter is 400cm in 3200x3200M2. where the distance for the ramp connecting the filter is 400cm in 3200x3200M2. where the distance for the ramp connection the ramp connecting the filter is 400cm in 3200x3200M2. Where the distance for the ramp connection to the ramp connection the ramp connecti				function
there are three cars for every distance between columns. > Wide samp connecting the floor is 400cm The width of the ramp connecting the floor is 400cm floor is 3200x3200M2. where the distance the ramp connecting the floor is 400cm where the distance the ramp connecting the floor is 400cm where the distance the ramp				activity, for
for every distance between columns. > Wide ramy wishout roof connecting the floor is 400cm. The width of the ramy connecting the floor is 400cm is 3200x3200M2. where the distance the rame that the rame is 200x400cm2 is 200x4				example: brisk
between columns. Wide ramp without roof connecting the floor is 400cm. The width of the ramp connecting the floor is 400Cm. where the distance floor is 400Cm. Where the distance floor is 400Cm where the distance floor is 400Cm.				walking
without roof connecting the 2x800x3200M2, floor is 400cm. The width of the ramp connecting the floor is 400Cm is 3200x3200M2. where the distance the construction the ramp that around the floor is 400Cm.				activities,
connecting the 2x800x3200M2, and space for width of the ramp connecting the heavy equipment floor is 400Cm is 3200x200M2. where the distance the construction for the ramp that the control of the construction for the ramp the same that the control of the contro		5. MILLS		
floor is 400cm. The width of the ramp connecting the floor is 4000cm is 3200x3200M2. where the distance the distance the ramp th		,		
width of the ramp connecting the floor is 400Cm is 3200×3200M2. where the distance the connection the ramp of the				
foor is 400Cm is 3200x3200M2. where the distance the annual form the annual f		l		
floor is 400Cm is 3200x3200M2. where the distance + Road construction are where the				
where the distance + Road construction are where the				- :
from the around and from the 20 where the		where the distance	+ Road construction	
			agast from the	
floor to the consumer (health road for traffic		floor to the		width of the
basement floor is care services) flow is 800M.		basement floor is		
320cm. where there is Ramp width of		320cm.	where there is	
> Distance of floor to only one point of Kamp water of outer space to		➤ Distance of floor to	only one point of	
	Li	l		

Faculty of Engineering and Faculty of Computer Science

Γ:	floor is 400cm. The	intersection traffic	the busement
	average distance	flow and traffic	floor is 400cm.
	from floor to	aming ements are	• Rainwater
	ceiling is 270cm.	made with	catchment
	≯ Medium voltage	management	design
	electrical ganel	traffic.	patterned fish
	building of PLN is	† The width of the	agines based on:
	800x800M2.	entrance / exit of	
	> Power house in the	construction land	space module
	basement has a size	ia 800cm.	800x800M2.
	of (800 +400)	At each distance	 In the design of
	x2400M2	of 800cm for	
	> Ground water tank	strengthening the	network control
	in open space has a	framework of	basin at any
	nize of	scaffolding are	distance
	800x400x400CM3	diagonally brace	2400cm or
	> Chiller plant on the	the frame in three	3200cm and
	top of Ground	dimensions.	small catchment
	water tank and	† At each distance	
	WWT	of 800cm to the	
	The sewage	utility grid	• Design of
	treatment plant	horizontal	outdoor space
	(WWTP) has	(plumbing,	for parking
	3200x800x400M3	ducting) applied	twelve
	size tub with four	to the main	
	units, each	hanger. Similarly,	2x6x400CM2
	collector has	for vertical use	
	800x400x200M3	network utility	loaded comidor.
l	nize.	main clamp.	• Small-river as
	> Medical gas central	+ Cable networks	flood control
	building has a size	such as horizontal	
	of	cable tray has a	
	800x2400x320M3.	width to the size	
	Location of the	of 40, 80, 160cm	
	hydrant box / piller		11 00000 0000 11;
	hydrant application	termination of the	800cm depth of
	designed jointly	project, the rest of	the river, and
	position at any	the land for the	
	distance 2400cm or	collection of	either side of
	3200cm.	unused work has	the river each
	> If the application	multiples	horizontal
	needs to be done	800x800M2 size.	width of
	post-tension		400cm.
	concrete is		Landscape
	effectively applied		design done on
	starting on the		the banks of the
	distance between		nyer serves as a
	the columns is		nyer view.
	800cm.		
-,		·····	i.

Table I. Developing of The Tarian Grid io: 8-10 floor kigh Building Desain, Construction.detinities and Open Space Design.

The main characteristics of the coordination of architectural concepts in building design with construction system is a key to reduce the uncertainty of the final result as the performance of a building construction project. In this case the most important is the application of the system must be able to ensure coordination in the design construction process so there is no conflict or disputes, rework, and even the failure of the construction. To achieve success, the coordination must optimized in terms of the substance of in design sustainable construction management.

Based on the planning stage, Based on the planning stage, then it should be considered important aspects, such as the scope of work, the proper equipment, competent personnel, working methods and organizational culture to support the success of the design and construction process as a whole project. post-construction Similarly, phase depends on strategic decisions that have been made in the planning stage. Finally, at the time held the post occupation evaluation will achieve optimal building performance.

Figure.1.shows the basic framework mindset. Framework shows the process and substance of the most influential and interact within the system boundary. If in it there is a small effect due to the impact of design quality is achieved, then there is sustainable development.

Table.1.shows that Stage of the Design Process in which there are elements within each classification grouping interact internally activities affect the next stage of construction process in which an interaction of internal activity, finally there is the human bionomic stage of the process.

Table.2. shows that The Tartan Grid concept developed multi role function has a significant influence on the following aspects: 8-10 floor high building design, construction activity, and open space design. Occurred relative

Faculty of Engineering and Faculty of Computer Science

similarity in coordination modules: 80-800-80cm. In this case, the various substances design object has a correlation with the size of the basis in coordination module.

4. CONCLUSION

This study, however, indicate that the importance of the role that design should be able to achieve an increase in the optimal design of technical quality in the process of building projects. Design coordination will reduce the impact of construction failures, reworks and change order of items in the contract work. Contrary to the above, the technical quality of design coordination produces a better design from different point of view. The Author will continue study in monitoring the performance of postoccupancy evaluation related to the health care activities in this building and development of other buildings.

5. ACKNOWLEDGEMENTS

The Author would like to thank to the Department of Architecture, Engineering Faculty, Diponegoro University; and the General Hospital Dr.Kariadi, Semarang.

6. REFERENCES

- Akintola Akintoye, Eamon Fitzgerald, 1995, Design and build: a survey of architects' views, Engineering, Construction and Architectural Management J, Vol. 2 Iss: 1, pp.27 -44
- 2. Atkinson, 1999, Project Management: Cost, Time and Quality, Two Best Guesses and A Phenomenon, It's Time to Accept Other Success Criteria, Int'l Journal Project Management, 17(6), 337-342.
- 3. Anonym, "Getting Value for Money from Construction Projects through Design", NATIONAL AUDIT OFFICE/NAO (Commission of Architecture Building Environment/CABE, Organization of Government Commerce/OGC).
- 4. Habraken, N.J., 1972, An Alternative to Mass Housing, Praeger Publisher.

- 5. Haponava Tatsiana and Saad Al-Jibouri, 2010, "Establishing influence of design process performance on end-project goals in construction using process-based model", Benchmarking: an International Journal, Vol. 17 Iss: 5, pp.657 – 676.
- 6. Liu and Walker,1998, Evaluation of Project Outcomes, *J Constr Mngt Econm*, 16(2), 209-219.
- 7. Morris Hicky Morgan, 1960 (Memon, 2007), **The Ten Books On Architecture**. Dover Publication
- Neale RH and Neale DE, 1989, Project Management: Construction Planning, Thomas Telford HQ London
- 9. Newcombe, 2000, The Anatomy of Two Projects: A Comparative Analysis Approach, *Int'l Journal of Project Management*, 18(3), 189-199.
- 10. Xiao.H and Proverbs, 2001, . Xiao and D. Proverbs, "The performance of contractors in Japan, the UK and the USA," International Journal of Quality & Reliability Management, vol. 19, pp. 672-687, 2002.



JI. Z.A. Pagar Alam No.26 Labuhan Ratu Bandar Lampung 35142 Phone: +62 721 701463 www.ubl.ac.id Lampung - Indonesia

conveight@2013