

WASTE MANAGEMENT ANALYSIS AT TPS 3R MANDIRI SEJAHTERA SINGOSARI MALANG

Arna Puji Rakhmawati, Ria A.A Soemitro and I.D.A.A Warmadewanthi
Department of Civil Engineering, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia
E-Mail: puji.arna@gmail.com

ABSTRACT

TPS 3R Mandiri Sejahtera using reduce, reuse, and recycle principles are established by government to solve the problems of wastes in the area of the district of Singosari, Malang. According to the monitoring and evaluation processes conducted by the Directorate General of Human Settlements, Ministry of Public Works and Public Housing in 2013, it shown that there were several things at the waste management at TPS 3R had been not in accordance with the Guidelines of waste management of Directorate General of Human Settlement. This research aimed to analysis waste management at TPS 3R Mandiri Sejahtera in order to optimize the waste management. This research using descriptive Analysis. The research result showed that the function of existing waste management condition was poor, with score is 167. The result indicated that by optimizing the service up to 3% in every year until 2021, the management of TPS 3R needed to add one tricycle, eight workers for separating waste and one worker for transporting waste and to enlarge the area up to 146 m² from 578 m² of current area. The potential optimization processes can be conducted by increasing the coverage of services by 44.81%, the amount of waste which could be transported is 22,30 m³/day.

Keywords : TPS 3R, management, optimalization

I. INTRODUCTION

The concept of 3R (Reduce, Reuse and Recycle) is oriented in the prevention of waste through reduce, reuse, and recycle. TPS 3R work involving community participation to make waste reduction sustainable and environmentally friendly. 3R waste management concept on a regional scale management is made to serve a community group consisting of at least 100 (one hundred) heads of household but not more than 1 (one) subdistrict.

The object of research was taken at TPS 3R Mandiri Sejahtera in Malang district because TPS 3R has several problems in the management of waste, such as: organization of KSM of waste management does not run properly, the source of clean water is not available at the site, a shortage of labor, and the difficulties to overcome damage of tool costs and modifications. Based on the above conditions, thus there will be two stages: first the analysis of waste management in TPS 3R Mandiri Sejahtera to assess the existing condition to get a score of TPS3R in order to know the position of TPS 3R functioning well or not, second in order to optimize waste management through asset management available and the third is to calculate the potential revenue of TPS 3R with the optimization of waste management.

II. LITERATURE REVIEW

Waste

The law No. 18 of 2008 on waste management is the remnant of the daily activities of human and / or natural processes in solid forms. While the Government Regulation No. 81 of 2012 has already described the definition of waste according to its type, namely household waste and similar household waste. Household waste is waste from daily activities in a household that does not include specific feces and trash. Household-like waste is household waste which comes from commercial areas, industrial areas, special areas, social facilities, public facilities, and / or other facilities.

From the several definition above, it can be concluded that the definition of garbage is waste that is solid or semi-solid derived from humans, animals, or

plants (natural processes) and are in nature of biodegradable and non-biodegradable.

Generated waste and density

Generated waste measurement was done by using using Load-Count Analysis method, based on transporting cycle, waste volume, and weight that enter the Transfer Station location or TPS 3R. Waste Density is the comparison between it's weigh and it's volume (kg / m³) (Ministry of Public Works, 2013). Waste density is very important in determining the amount of waste. The waste density determination is based on SNI M-36-1991-03 done by weighing the garbage sampled using 100 cm x 100 cm x 50 cm sized box.

The Principle of operation of TPS 3R

In principle, the establishment of Waste Processing Site TPS 3R is directed to the concept of Reduce, Reuse and Recycle, where there are efforts to reduce waste from the source to the utilization of organic waste as compost material and non-organic components of industrial activity as a secondary material such as plastic, paper, metal, glass and others. Reduce (R1) or waste reduction is an effort to reduce waste generation at the source environment and can even be done since before the waste is generated. Reuse (R2) is reusing materials so that it will not become waste (without going through the process of management), such as reuse of paper, reuse of bottles of "beverage" for water, and use a rechargeable battery and others. Recycle (R3) is implying that recycling a material have not been use used anymore (waste) into other materials after going through a management process such as processing bottles / used plastic into plastic pellets to be printed and become buckets, hanger, pots and so on.

The concept of the implementation of waste reduction is carried out by regional-scale approach. Waste Management of Household Scale and Regions can be seen in Figure 1 Scale of Household Waste Management and Regions (Directorate General of Human Settlement, 2014)

III. METHODS

This study analysis was using descriptive analysis. Descriptive analysis was used to calculate the optimization of waste management at the TPS 3R Mandiri Sejahtera and potential revenue. Process study is shown in the figure below :

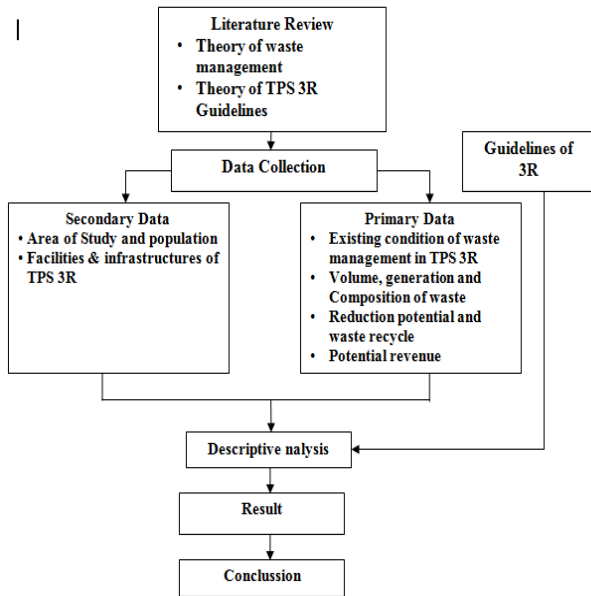


Figure-1. Process Study

IV. RESULT AND DISCUSSIONS

A. Research object

Singosari is one of 33 Districts in Malang, which has an overall area of approximately 118.51 km² or 3.98 percent of the total area of Malang District. Singosari Subdistrict is located at an altitude of 487 meters above sea level with an average temperature of 22 ° C - 32 ° C and an average rainfall of 349 mm per year. Singosari Subdistrict boundaries are as follows:

- North Side : Subdistrict of Lawang and District of Pasuruan
- East Side :Subdistrict of Jabung and Subdistrict of Pakir
- South Side :Subdistrict of Blimbing of Malang City
- West Side : Subdistric of Karangploso

Geographic location of the village in the subdistrict of Singosari is in the form of plains and slopes with flat topography and hills. In terms of administrative the region of Singosari Subdistrict are divided into 3 (three) Urban-Villages and 14 (fourteen) villages. TPS 3R Mandiri Sejahtera lies in Krajan boro hamlet, watugede village, Subdistrict of Singosari, Distric of Malang. TPS 3R Mandiri Sejahtera was built in 2012 by CV. Zidane Karya with contract value amounting to Rp. 1,132,838,000.

B. TPS 3R Waste Management Evaluation

The evaluation include location aspect, physical aspect, facility aspect, organizational and investment aspect, social aspect, legal aspect and operational aspect. Evaluation result of waste management at TPS 3R Mandiri Sejahtera:

1. Location aspect is consists of location indicators of TPS 3R Mandiri Sejahtera, land status, and land area. Total points are 9. The Location of TPS 3R is already right that far enough from public houses which has distance about 100-500 meters. Land statue of TPS 3R is grant land from village government, the area is 2000 m².
2. Physical aspect consists of topography, hydrology, water sources, and the previous land usage. Total points are 10. The minus point is water sources availability.
3. Facility aspect:
 - a. Lug of waste. Consists of lug of waste container placement (organic waste and non organic waste). Total points are 11.
 - b. Processing Household waste scale Consists of the composter, composter volume, composter amount, the color of compost, the smell of compost, compost form, the recycled waste of non organic waste and the products. Total points are 0. There is no waste reduce from household. The principles of 3R are not used by peoples in Watugede village.
 - c. Waste processing on region scale Consists of transportation, transportation models, used technology of waste recycling, composting technology, composting tools, capacity of TPS 3R, Service coverage, the color of compost, the smell of compost and the products. Total points are 26. More than 50% operation are running as planned.
4. Organizational and investment aspect consist of institution model, organizational structure, legal, investment, funds allocation, and financial report. Total points are 57. The minus points are from organizational structure that isn't running well and financial report do not regularly booked.
5. Social aspect is consist of citizen involvement, community groups, and community meetings frequency. Total points are 9. Social participation is represented by groups. Community meeting just one time for a year.
6. Legal aspect consist of regulation. Total points are 10.
7. Operational aspects consist of operational monitoring evaluation and indicators of operating monitoring evaluation. Total points are 30.

From those evaluation points will show the category of waste management. Evaluation of current condition use guidelines 3R from Directorate General of Human Settlements. The Result of calculation is 167 points, so the waste management in TPS 3R Mandiri Sejahtera include in less effective category. There are some categories of TPS 3R evaluation result:

- 1. Effective : 225 – 311 points
- 2. Less Effective : 139 – 225 points
- 3. Not effective : 51 – 138 points

The minus point on the aspects such as :

1. Waste Management of Household Scale. There are no reduction waste in household scale and no recycled products.

- The organization. KSM not optimal due to members whose no longer work in the organization.
- Financial reports. There are several financial report are not recorded in detail such as income and maintenance cost.

1. Waste Reception Analysis

TPS 3R Mandiri Sejahtera receive waste from Watugede villagers, Tamanharjo Residence, and industries plastic waste. Observation result of daily average of waste at TPS 3R Mandiri Sejahtera without industries plastic waste is 13,61 m³. Waste transporting vehicles use pickup truck and tricycle which have 5 m³ and 2.5 m³ capacity.

Tabel-1 Weekly Waste Reception at TPS 3R Mandiri Sejahtera

No	Waste Source	Waste Volume (m ³ /6 days)
1	Watugede Village	53.94
2	Tamanharjo Residence	27.66
3	Industries Plastic Waste	14
Total Weekly Volume Received		95.6 m ³

From Table-1 above, TPS 3R Mandiri Sejahtera receive waste 95.6 m³ in a week or 15.94 m³ in a day.

Table-2. The Observation of Waste Density at TPS 3R Mandiri Sejahtera

Date	Test box vol (m ³)	Test box weight (kg)	Total weight (kg)	Waste weight (Kg)	Waste vol in test box (m ³)	Density (kg/m ³)
Mon, 7 September 2015	0,5	12	93	81	0.45	180.00
Tue, 8 September 2015	0,5	12	103	91	0.55	165.45
Wed, 9 September 2015	0,5	12	98	86	0.43	200.00
Thu, 10 September 2015	0,5	12	121	109	0.54	201.85
Fri, 11 September 2015	0,5	12	97	85	0.45	188.89
Sat, 12 September 2015	0,5	12	80	68	0.40	170.00
Mon, 14 September 2015	0,5	12	90	78	0.48	162.50
Tue, 15 September 2015	0,5	12	103	91	0.50	182.00
Average Density						181.34

From Table-2 above, the average of waste density at TPS 3R Mandiri Sejahtera is 181.34 kg/m³. TPS 3R Mandiri Sejahtera serves about 810 family, then in a family consist of three members. So it can be calculated that $8.99 / 2550 = 0.00353$ m³. Every person produces 0.00353 m³ or 0.67 kg of waste in a day.

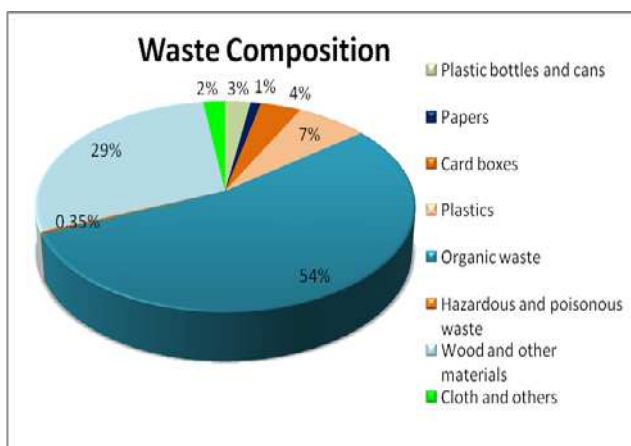


Figure-2. Waste Composition

According to SNI 19-3964-1994 about sampling and calculation method of waste composition from urban areas, from 100 kg of waste sampling the result is described as the pie diagram above. The highest percentage is organic waste and the smallest percentage is hazardous and poisonous waste.

2. Population Growth and Waste Analysis

From Central Bureau of Statistic and District Office Data (BPS), the population of Watugede village as described on table below.

Table-3 Watugede Population Data

Year	Population
2008	5854
2009	5979
2010	6271
2011	6404
2012	6482
2013	8836
2014	8907

To determine the population growth projection, some methods are used. Arithmetic, Geometric, and Least Square Method.

Table-4 Correlation Coefficient:

No	Calculation Method	Coefficient
1	Arithmetic	0,404
2	Geometric	0,893
3	Least Square	0,879

Because of the correlation coefficient of Geometric Method close to one (1), so this method is used.

$$P_n = P(1+r)^n$$

P_n : Population year (n)

P : Population

n : Year

r : Population growth ratio

Table-5 Population Projection

Year	Population Projection
2015	9511
2016	10156
2017	10845
2018	11581
2019	12366
2020	13205
2021	14100

From that population growth projection, the waste projection can be calculated. The calculate use the data that produce waste is 0.0037 m³/person/day in Table-6.

Table-6 Projection of Waste Volume in Watugede

Year	Population	Waste Generated
2015	9511	33.57
2016	10156	35.85
2017	10845	38.28
2018	11581	40.88
2019	12366	43.65
2020	13205	46.61
2021	14100	49.77

Based on table 6 projection of waste volume in watugede in 2015 are 33.57 m³, in 2016 are 35.85, in 2017 are 38.28 etc. It will increase every year. According to 2014 population data of watugede village:

Total inhabitant : 8907
 Serviced inhabitant : 2400 (800 family)
 Total services TPS 3R : 26.95%

With current services, TPS 3R Mandiri Sejahtera only receives 26.95% or 8.99 m³ from total amount waste that can be received. There are about 73.05% from total Watugede waste that cannot be serviced.

C. TPS 3R Mandiri Sejahtera Service Capacity Analysis

1. Waste Separation Capacity Analysis

The purpose of waste separation capacity analysis at TPS 3R Mandiri Sejahtera to get information of waste management by using existing assets at TPS 3R.

Table-7 Waste Reception Volume per Day

No	Waste source	Waste volume per day	Waste Composition
1	Watugede village	8.99	Household waste
2	Tamanharjo Residence	4.61	Household waste
3	Industrial plastic waste	2.33	Plastic waste
Total		15.93	

From the observation, effective working hour for separation process is 7 hours a day and 6 days a week. The capacity of each separation worker is described as the table below.

Table-6 Separation Worker Capacity TPS 3R Mandiri Sejahtera

No	Worker	Daily load (m ³)	Job details	Capacity/w orker/hour	Work hour	Worker	Capacity per day
1	Group A	13.60	Watugede; Tamanharjo waste	0.375	7	4	10.5
2	Group B	2.33	Industrial plastic waste	0.083	7	4	2.324
Total							12.824

From the table above, everyday there is about 3.1 m³ per day of waste unable to be separated. Then those waste become additional load on next day. That's why TPS 3R Mandiri Sejahtera difficult to expand its capacity. For optimum separation process, a worker is added, so not separated waste become 0.475 m³ per day.

Table-8 Waste Separation Worker Needs

Year	Separated Waste(m ³ /day)	Worker Capacity y/hour	Person	Work Hours	Output (m ³ /day)	Worker Addition
2015	13.61	0.3125	4	7	8.75	0
2016	15.30	0.3125	6	7	13.13	2
2017	17.17	0.3125	7	7	15.31	1
2018	19.25	0.3125	8	7	17.50	1
2019	21.55	0.3125	9	7	19.69	1
2020	24.10	0.3125	10	7	21.88	1
2021	26.91	0.3125	12	7	26.25	2

Based on Table 8. the workers addition can be carried out starting in 2016 by adding two workers, then at 2017 until 2020 need one worker addition each year. And in 2021 need two worker.

2. Watugede Waste Pick Up Service Analysis

The current waste transportation capacity and calculation and observation pickup cycle can be seen as follow :

Table-9 Current Waste Transportation Capacity TPS 3R Mandiri Sejahtera

No	Vehicle	Worker	Capacity	Pick up time (Hours)	Available work hours	Unused work hours (Jam)	Max pick up capacity (m ³)	Pick up cycle order
1	Pickup truck	2	5	2.5	5	2.5	5	1
	Pickup truck	2	5	2.5	2.5	0	5	2
2	Tricycle	1	3	1.75	5	3.25	3	1
	Tricycle	1	3	1.75	3.25	1.5	3	2
Total pick up capacity							16	

Waste transportation at TPS 3R Mandiri Sejahtera used today are 1 pickup and 1 tricycle with loading capacity of each are 5 m³ dan 3 m³ and the total of pick cycle are four at total maximum capacity is 15 m³.

Table-10 Maximizing Waste Pick Up Cycle Calculation

No	Vehicle	Pick Up		Waste Dropping and Break Time				Total Time per Cycle		Cycle Time	Work hours	Remaining Time
		1 st Cycl e	2 nd Cycl e	1 st Cycle		2 nd Cycle		1 st Cycl e	2 nd Cycl e			
		Hrs	Hrs	Mns	Hrs	Mns	Hrs	Hrs	Hrs			
1	Pickup truck	2.25	2	15	0.25	15	0.25	2.50	2.25	4.75	5	0.25
2	Tricycle	1.5	1.5	15	0.25	15	0.25	1.75	1.75	1.75	5	1.50
3	Tricycle	1.5	1.5	15	0.25	15	0.25	1.75	1.75	1.75	5	1.50

From the table above. by maximizing waste pick up cycle. pick up has 4.75 hours cycle time and tricycles have 1.75 hours each.

Table-11 Vehicle Addition Projection

Year	Waste Generated	Waste vol per day (m ³ /day)	Service Rate %	Picked up Waste	Vehicle Needs
2015	33.57	13.60	26.81	15	0
2016	35.85	15.30	29.81	15	0
2017	38.28	17.17	32.81	15	0
2018	40.88	19.25	35.81	15	0
2019	43.65	21.55	38.81	17	0
2020	46.61	24.10	41.81	24	1
2021	49.77	26.91	44.81	24	0

Vehicle addition needed in 2021 is one pickup truck.

3. Recovery Factor and Reduction Potential

There are 4 types of waste that have Recovery Factor (RF) value. they are bottles and can. paper and cardboard. plastic. and wet waste. Waste with RF can be seen in Table 11.

Table-12 TPS 3R Mandiri Sejahtera Recovery Factors

Waste Component	Waste Composition (%)	Waste Weight (kg/day)	RF (%)	Waste Reduction (kg/day)	Waste Reduction Percentage (%)	Waste Residue (kg/day)
Bottles and Cans	2.5	43.29	100	43.29	2.5	0
Paper and Cardboard	5	86.59	100	86.59	5	0
Plastics	7	121.23	100	121.23	7	0
Wet Waste	54	935.17	100	935.17	52	0
Hazardous poisonous waste	0.35	6.06	0	0	0	6.06
Woods and others	29	502.22	0	0	0	502.22
Clothes and others	2.15	37.23	0	0	0	37.23
Total (%)	100	1731.80	-	1186.28	66.5	545.52

Table-13 TPS 3R Mandiri Sejahtera Waste Reduction Potential

Year	Waste Vol	RF (%)	Utilized waste (m ³ /day)
2015	13.60	66.5	9.04
2016	15.30	66.5	10.17
2017	17.17	66.5	11.42
2018	19.25	66.5	12.80
2019	21.55	66.5	14.33
2020	24.10	66.5	16.03
2021	26.91	66.5	17.90

Based on Table 13 the utilized waste is 66.5 % of the total waste that come from watugede and tamanharjo residence. In 2015. 9.04 m³ waste is utilized. in 2016 of 10.17 m³. in 2017 of 11.42 m³ and continue to rise until reaching service 44.81% in 2021 with the amount of utilized waste is 17.90 m³.

4. Land Needs Analysis for TPS 3R Mandiri Sejahtera. Singosari

TPST 3R Mandiri Sejahtera in 2014 land requirement to enter the reception area trash. waste sorting. composting and waste storage are as follows:

- Land acceptance of new waste entry : 5 m³
- Land of industrial plastic waste reception (per week) : 9 m³
- Place for waste separation : 18 m³
- Areas of wet waste separation : 12 m³
- Areas of sorting of plastic waste from watugede and tamanharjo : 1 m³
- Area of plastic waste sorting from industrial waste : 14 m³
- Areas of separation of paper and cardboard: 2 m³
- Areas of separation of bottle cans and plastic bottles: 1 m³.
- Recycling bin storage area : 18.1 m³.

Table-14 Waste Area Needed Projection

Year	Current Area	Service Rate (%)	Area Needed (m ²)
2015	578	26.81	549
2016	578	29.81	572

Year	Current Area	Service Rate (%)	Area Needed (m ²)
2017	578	32.81	596
2018	578	35.81	623
2019	578	38.81	652
2020	578	41.81	687
2021	578	44.81	724

Waste area needed in 2017 until 2021 with service up to 44.81%. Based on the result of the calculation of the total land requirement is 146 m².

5. Financial Analysis of Waste Management in TPS 3R Mandiri Sejahtera

Financial analysis of waste management is needed for continuity of service TPS 3R Mandiri Sejahtera. By the financial analysis is used to calculating investment feasibility.

Table-15 TPS 3R Cash Flow

Year	Income (Rp)	Expense (Rp)
2015	277.052.294	226.815.413
2016	322.025.394	333.694.211
2017	409.128.634	402.800.932
2018	474.094.289	468.785.256
2019	548.520.203	543.407.547
2020	688.807.494	765.430.997
2021	794.341.717	623.037.446

Based on table 14. Surplus income will be happened at 2015 and become deficit at 2020 due to waste area enlargement. Then in 2021 will be surplus 171.304.271 rupiahs.

6. NPV Analysis

Net Present Value (NPV) for investment at TPS 3R until 2021 is ≤ 0 (-1,081,723,606) not feasible.

V. CONCLUSIONS

Based on the results of this study the following conclusions are drawn :

- The function of existing waste management condition at TPS 3R Mandiri Sejahtera is poor with point 167 in the category less function.
- Optimization of waste management by optimization of available asset at TPS 3R such as land. machines and vehicle.
- Adding 8 separating workers. 1 transporting workers. 1 vehicle and 146 m³ of land to reach the service target of 50%.
- NPV ≤ 0, not feasible investment.

REFERENCES

- Damanhuri. E. Padmi T. 2010. Waste Management. Bandung.
- Directorate General of Human Settlement Ministry of Public Work and Public Housing. 2014. 3R Guidance. Jakarta
- Hidayat. M. 2012. Asset Management. Laksbang Pressindo Yogyakarta.Yogyakarta
- Ministry of Public Work .2007. Regulation of The Minister of Public Works No. 21/PRT/M/2006 about

National Policy and Strategy of Waste Management
System Development. Jakarta

- [5] Ministry of Public Works. 2013. Third Module
Basics of Waste Management System. Jakarta