

Design and Optimization of Industrial Manipulator

Dharamendra Kumar¹, Rahul²

¹Department of ME, CBS Group of Institution, Jhajjar, Haryana, India

²Assistant Professor, Department of ME, CBS Group of Institution, Jhajjar, Haryana, India

Abstract—Industrial Manipulator is very widely used device in Automation, it is an essential motion subsystem component of robotic system for positioning, orientating object so that robot can perform useful task in automation. The main objectives of this project are to design and implement a 4-DOF pick and place object. This project can be self-operational in controlling, stating with simple tasks like gripping, lifting, placing and releasing. In this project, the goal is on 4-DOF of articulated arm. Articulated arm is having revolute joints that allowed angular rotation between adjacent joint. Four servo motors have been used in this project to perform four degree of freedom (4-DOF). There are numerous dimensions over which robotic arms can be analyzed, such as torque, payload, speed, range, repeatability and cost, to name a few. Manipulators are designed to execute required movements. Their controller design is also equally important. The manipulator arm is controlled by serial servo controller circuit boards. The controller have been used for servo motor actuation is at mega 16 Development board.

Keywords— Industrial Manipulator, Design Optimization, Automation.

I. INTRODUCTION

The field of robotics has its origins in science fictions. The word robot comes from the Czech word "robota" means forced labor in 1920. It took another 40 years before the modern technology of industrial robotics began. Today, robots are highly automated mechanical manipulators controlled by computers. A robot may appear like a human being or an animal or a simple electro-mechanical device. A robot may act under the direct control of a human (e.g. the robotic arm of the space shuttle) or autonomously under the control of a programmed computer. Robots may be used to perform tasks that are too dangerous or difficult for humans to implement directly (e.g. nuclear waste cleanup) or may be used to automate repetitive tasks that can be performed more cheaply by a robot than by the employment of a human (e.g. automobile production) or may be used to automate mindless repetitive tasks that

should be performed with more precision by a robot than by a human (material handling, material transfer applications, machine loading and unloading, processing operations, assembly and inspection).

The last two decades have witnessed a significant advance in the field of robots application. Many more applications are expected to appear in space exploration, battlefield and in various actives of daily life in the coming years. A robot is a mechanical device that performs automated tasks and movements, according to either pre-defined program or a set of general guidelines and direct human supervision. These tasks either replace or enhance human work, such as in manufacturing, contraction or manipulation of heavy or hazardous material. Robot is an integral part in automating the flexible manufacturing system that one greatly in demand these days. Robots are now more than a machine, as robots have become the solution of the future as cost labor wages and customers demand. Even though the cost of acquiring robotic system is quite expensive but as today's rapid development and a very high demand in quality with ISO standards, human are no longer capable of such demands. Research and development of future robots is moving at a very rapid pace due to the constantly improving and upgrading of the quality standards of products.

1.1 PROBLEM STATEMENT:

To solve the problems of pick and place the cylindrical object having 6 cm diameter and 150 gram weight from one conveyor to another at room temperature in order to reduce human efforts and efficient material handling. The distance between two conveyers is 50 cm.

II. DESIGN OF INDUSTRIAL MANIPULATOR

The mechanical construction in this project is to build and assemble the robotic arm body. After giving a thorough consideration of all the preceding works in this field, a four degree of freedom manipulator having variable programmed motions to carry out variety of tasks in diverse environments is chosen. This is a four axis articulate manipulator designed to move material

like machine parts, tools, specialized devices, etc. It is driven by four servomotors and has a gripper as end-effectors. The gripper has fingers grasping and manipulation of objects as big as a 150 ml cylindrical bottle and having a weight of about 150 gm throughout the arm's workspace.

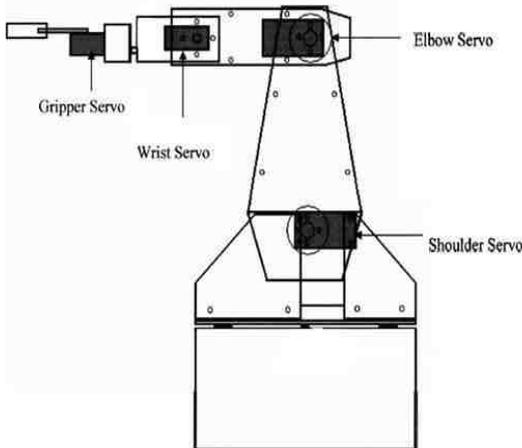


Fig.1: Design Overview of Manipulator

2.1 DESIGN CONSIDERATION:

The following were put into consideration in the design process.

- i. Electrical actuators DC servo are chosen instead of hydraulic and pneumatic actuators because of the little power requirement and its light weight which is suitable for this design.
- ii. Materials used for the fabrication were locally sourced from available materials.
- iii. The materials which will be used for the design will be light in weight so as to reduce the weight concentration on the base and the shoulder.
- iv. Rectangular sheets instead of blocks are chosen for the links because of their light weight and stability and to reduce the weight of the arm.
- v. A continuous path controller was chosen (PIC microcontroller was used).
- vi. The torque is fully balanced by the inertia of the electric motors.

2.2 SELECTION OF DEGREE OF FREEDOM (DOF):

The number of independent movements that an object can perform in 3D space is termed as the number of degree of freedom (DOF). Thus, a rigid body free in space has six degree of freedom – three for positions and three for orientations. For our application 4 DOF are suitable.

2.3 MATERIAL SELECTION:

The most suitable material to fabricate the structure of the arm has to be light and strong. Otherwise, the servo motor will not be able to pull up the arm and to perform the desired turning degree. Among the materials that can be considered to fabricate the structure are aluminum,

Perspex, plastic polymer and carbon fiber. In choosing the fabrication materials, the aspect of availability of the materials, the overall cost and the flexibility to be shaped, should also be taken into consideration. Thus among the four materials considered, the aluminum is the most ideal material to be chosen as fabrication material.

2.4 SPECIFICATIONS OF ROBOTIC ARM:

The robot arm for this project is the revolute type that closely resembles the human arm. Shoulder that mounted on base can move the arm through 180 degrees, from horizontal to vertical on each side. The shoulder uses large-scale servo, provide the torque needed to lift the rest of the arm, as well as any object that it may be grasping. Attached to the shoulder piece is an elbow that can move through 180 degrees, also powered by a large-scale servo. The wrist is made up of one standard servo and can move through 180 degrees, in vertical direction. Attached to the wrist is a two-fingered gripper that utilizes a unique design built around a single standard servo.

Table.1: Specification of robotic arm

Specification	Value
Number of axes	4
Horizontal reach	230 mm
Vertical reach	130 mm
Drives	4 servo motors
Configuration	4 Axes plus gripper.
	All axes completely independent.
	All axes can be controlled simultaneously.
Work Envelope	(a) Shoulder Rotation -150 degrees
	(b) Elbow Rotation -180 degrees
	(c) Wrist Rotation -180 degrees
	(d) Gripper Rotation -90 degrees

III. CAD MODELLING OF MANIPULATOR

Considering the all points in designing, CAD model (Creo software) is used for robotic arm design. Various component of robotic arm is shoulder, elbow, wrist, grippers. The purpose of utilizing this Creo software is because Creo can provide a detail, real images and walk through overviews for demonstrating design. The 3D views of various parts of robotic arm are shown in fig. 2-8.

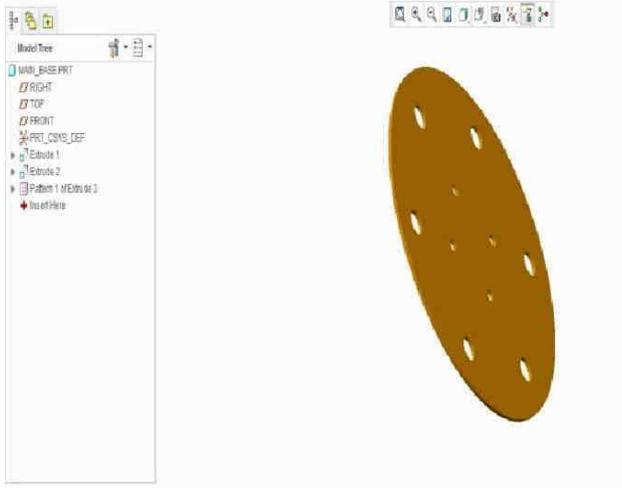


Fig.2: 3D view of Base Plate

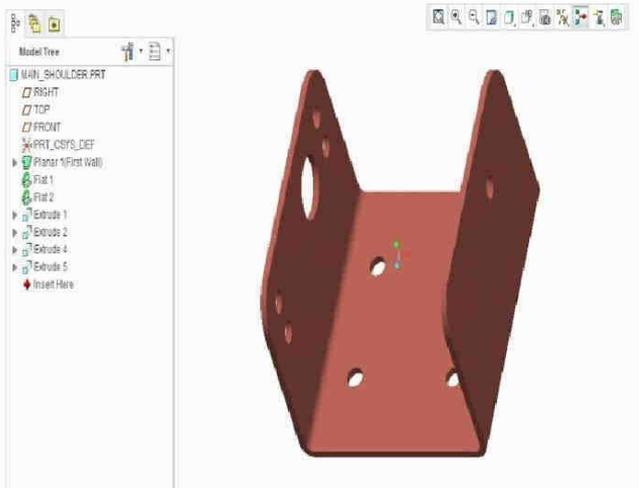


Fig.3: 3D view of Shoulder Base

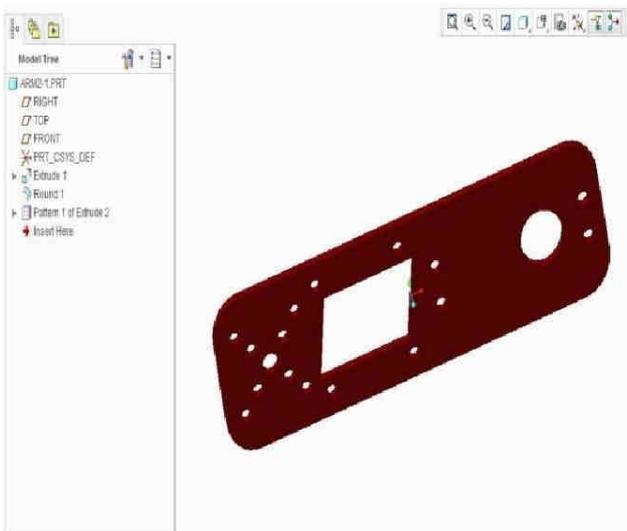


Fig.4: 3D view of Shoulder

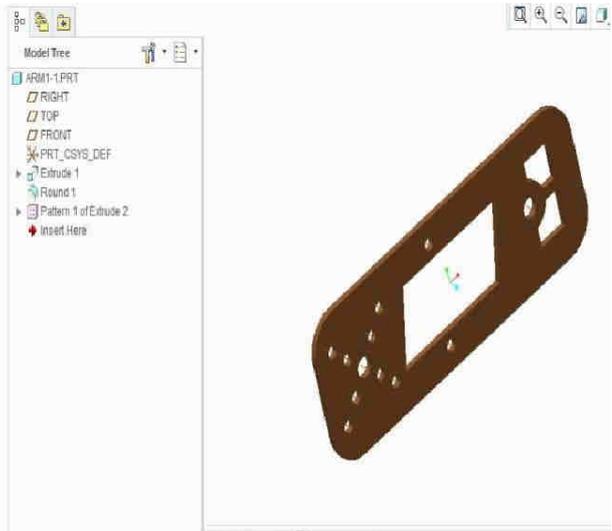


Fig.5: 3D view of Elbow

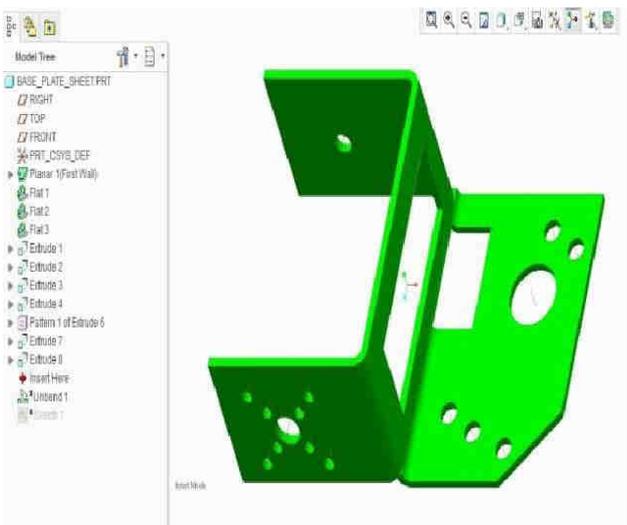


Fig.6: 3D view of Gripper Base

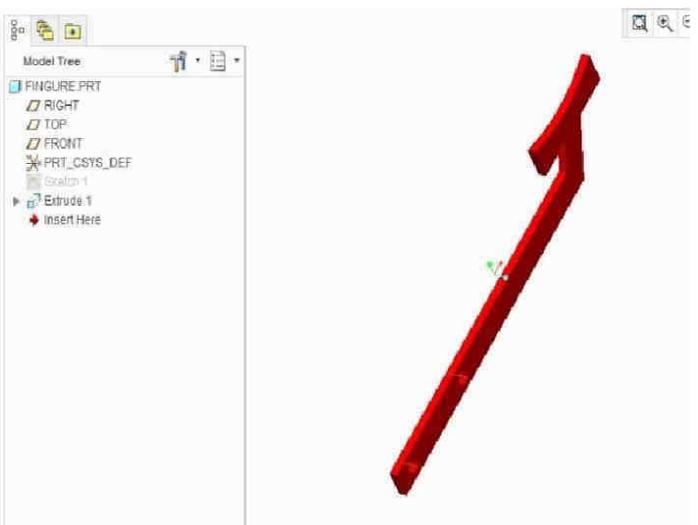


Fig.7: 3D view of Finger

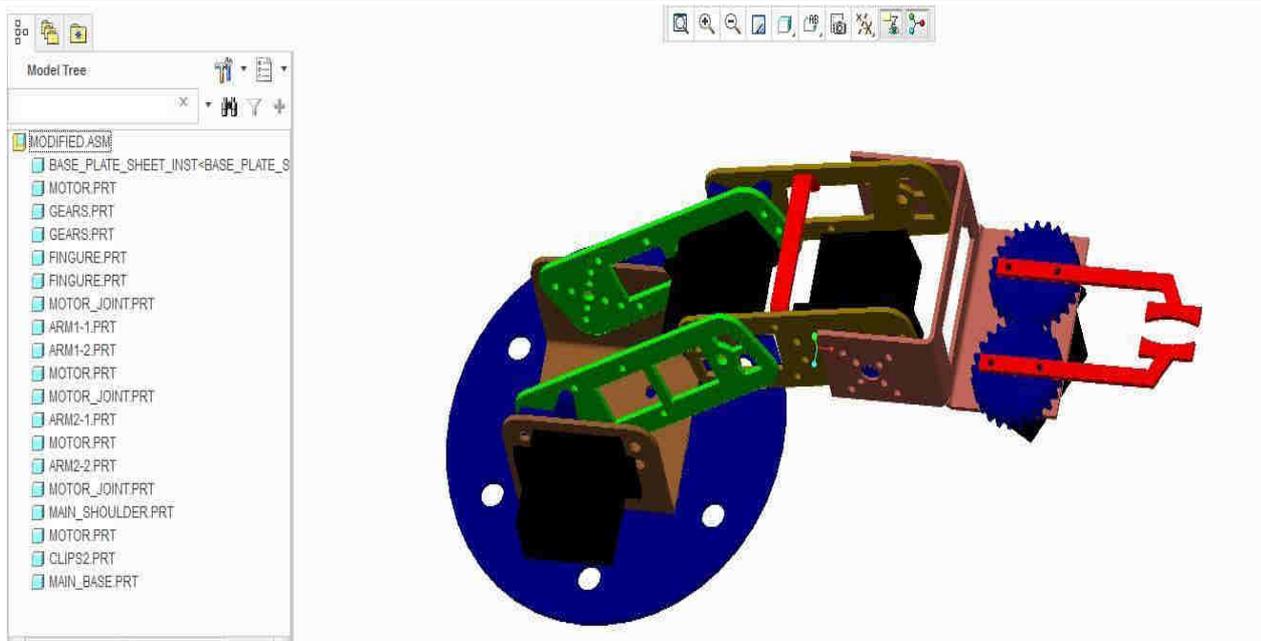


Fig.8: 3D view of full Assembly

IV. INVERSE KINEMATICS ANALYSIS

In order to control the position and orientation of end-effector of a robot arm to reach its object, the inverse kinematics solution is more important.

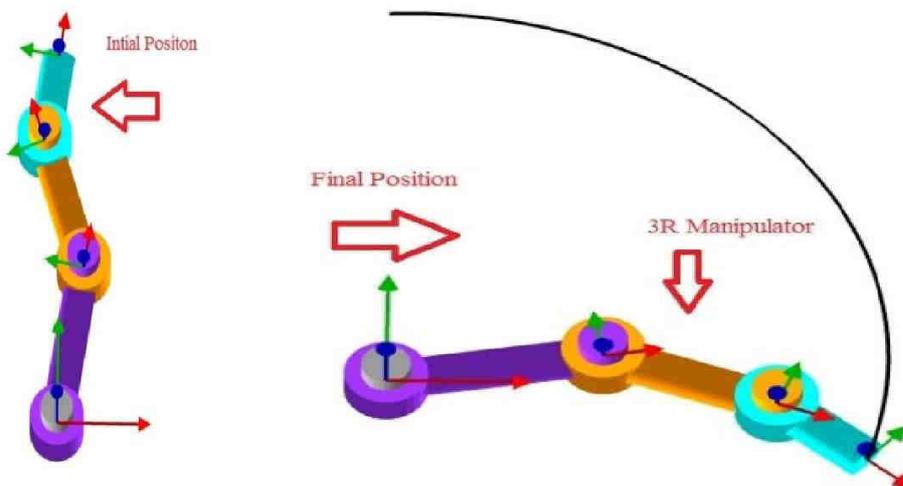


Fig.9: Initial and final position of Robotic arm.

The position and orientation of the end-effector in terms of given joint angles is calculated using a set of equations and this is forward kinematics. This set of equations is formed using DH parameters obtained from the link coordinate frame assignation. The parameters for the manipulator are listed in Table 4.5.1, where is the rotation about the Z-axis, α rotation about the X-axis, d transition along the Z-axis, and transition along the X-axis.

Table.2: DH kinematic parameter table

Axis	Type	Joint angle θ in degree	Link length d_i in m	Joint Offset a_i in m	Twist angle α_i in radian
1	Shoulder	θ_1	0.13	0	0
2	Elbow	θ_2	0.11	0	0
3	Base	θ_3	0.07	0	0


Used these data as a input for ANSYS Software for finding the joint angle (θ) for different positions of robotic arm. Following results are obtained:

Table.3: Joint angles for different positions of end effector


Sr. No.	Positions	in case 1	in Case 2
1	X = 0.23	$\theta_1 = -35.59$	$\theta_1 = 49.84$
	Y = 0.02	$\theta_2 = 96.02$	$\theta_2 = -96.02$
		$\theta_3 = -60.42$	$\theta_3 = 46.17$
2	X = 0.08	$\theta_1 = 25.49$	$\theta_1 = 140.25$
	Y = 0.08	$\theta_2 = 141.87$	$\theta_2 = -141.87$
		$\theta_3 = -167.37$	$\theta_3 = 1.62$
3	X = 0.12	$\theta_1 = 17.32$	$\theta_1 = 117.43$
	Y = 0.12	$\theta_2 = 115.0$	$\theta_2 = -115.0$
		$\theta_3 = -132.35$	$\theta_3 = -2.40$
	X = 0.17	$\theta_1 = 37.99$	$\theta_1 = 86.48$

4	Y = 0.19	$\theta_2 = 53.28$	$\theta_2 = -53.28$
		$\theta_3 = -91.27$	$\theta_3 = -33.20$
5	X = 0.02	$\theta_1 = 91.90$	$\theta_1 = 112.61$
	Y = 0.23	$\theta_2 = 22.61$	$\theta_2 = -22.61$
		$\theta_3 = -114.52$	$\theta_3 = -90.00$


Where case 1 and case 2 are two different trajectory of robotic arm which is suitable for our project application. We can select any one of them. Some Graphs output come out from ANSYS Software by providing initial positions and final positions in term of joint angle as below:

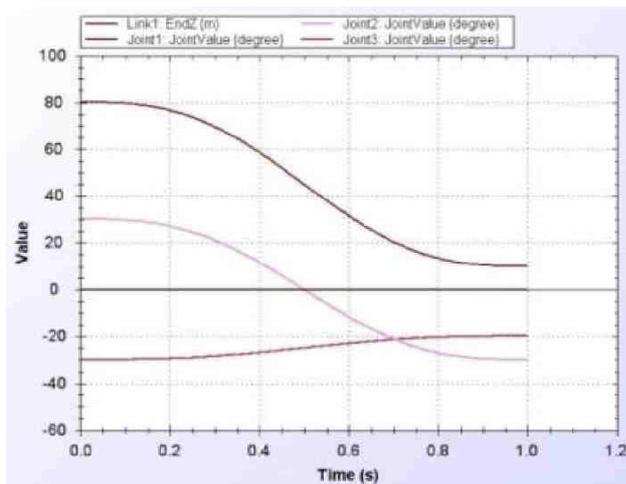


Joint Value Vs Time

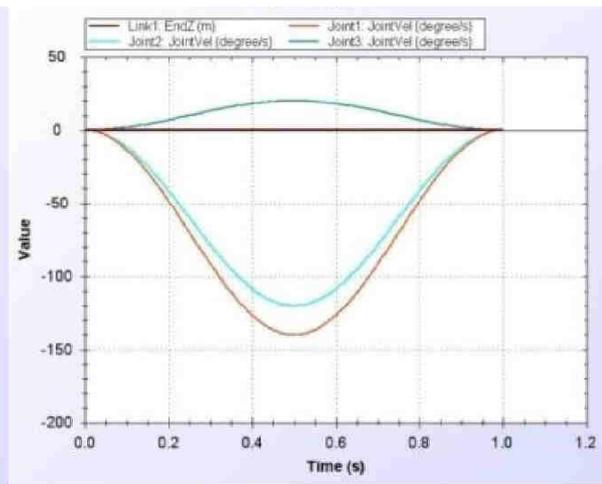

Joint Velocity Vs Time

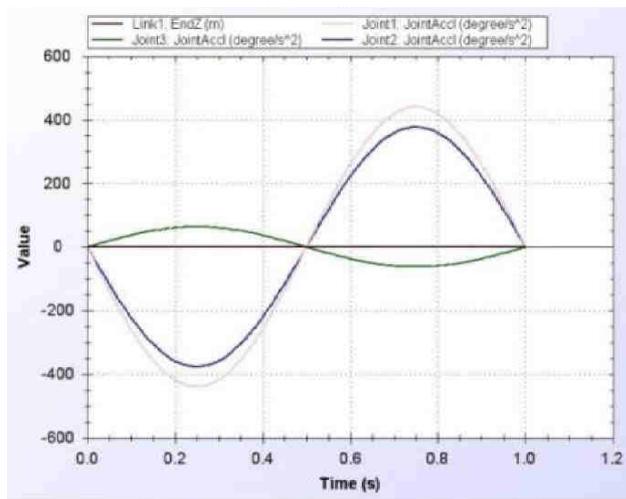

Joint Acceleration Vs Time

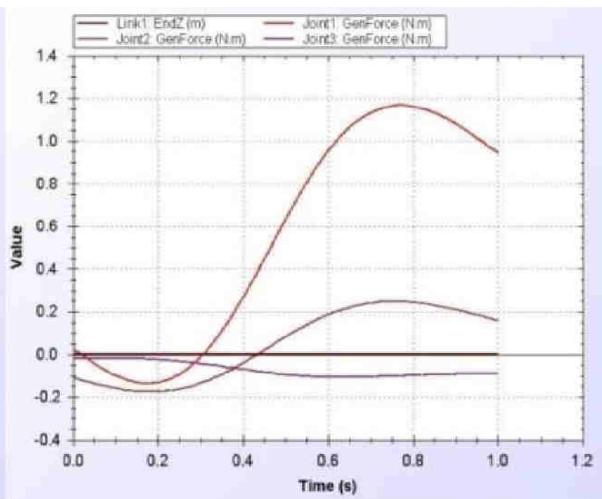

Joint Torque Vs Time

Fig.10: Graphs obtained by ANSYS Software.

V. FE ANALYSIS

Ansys software uses the displacement formulation of the finite element method to calculate component displacements, strains, and stresses under internal and external loads. The geometry under analysis is discretized using tetrahedral (3D), triangular (2D), and beam elements, and solved by either a direct sparse or

iterative solver. SOLIDWORKS Simulation also offers the 2D simplification assumption for plane stress, plane strain, extruded, or axis symmetric options. Ansys Software can use either an h or p adaptive element type, providing a great advantage to designers and engineers as the adaptive method ensures that the solution has converged.

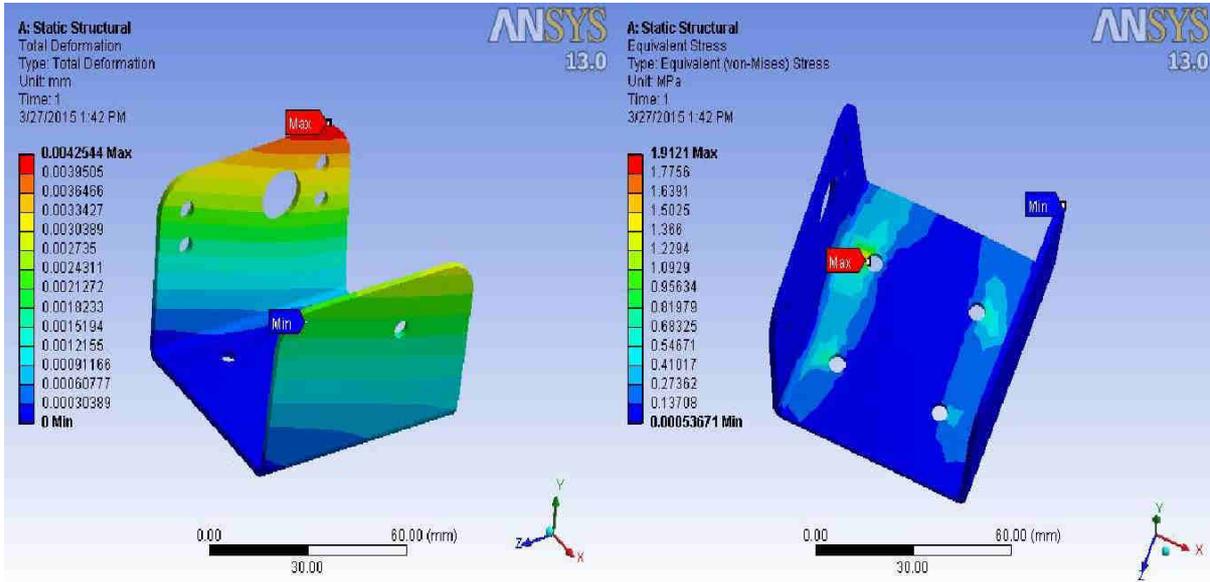


Fig.11: Total Deformation of Shoulder Base

Fig.12: Stress on Shoulder Base

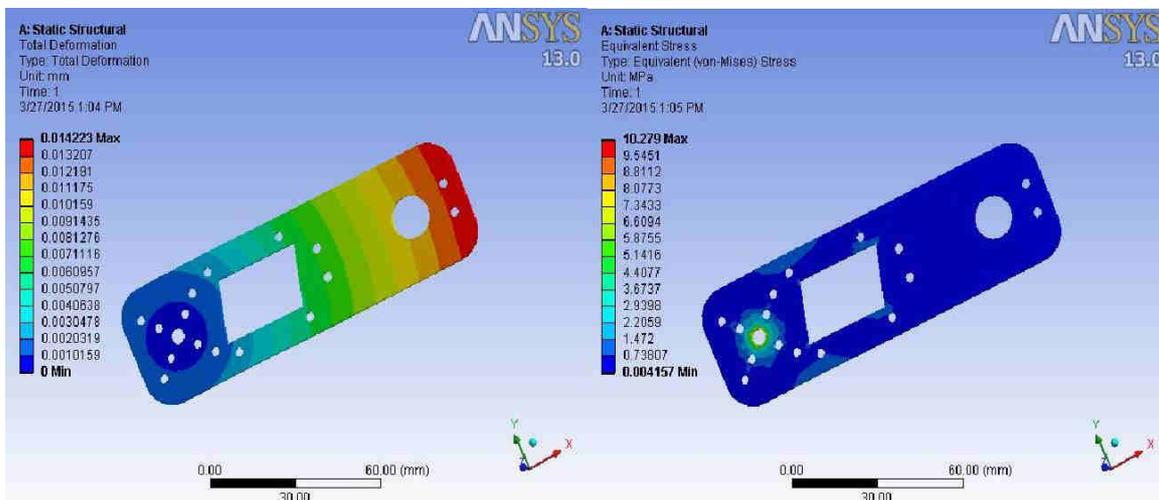


Fig.13: Total Deformation of Shoulder

Fig.14: Stress on Shoulder

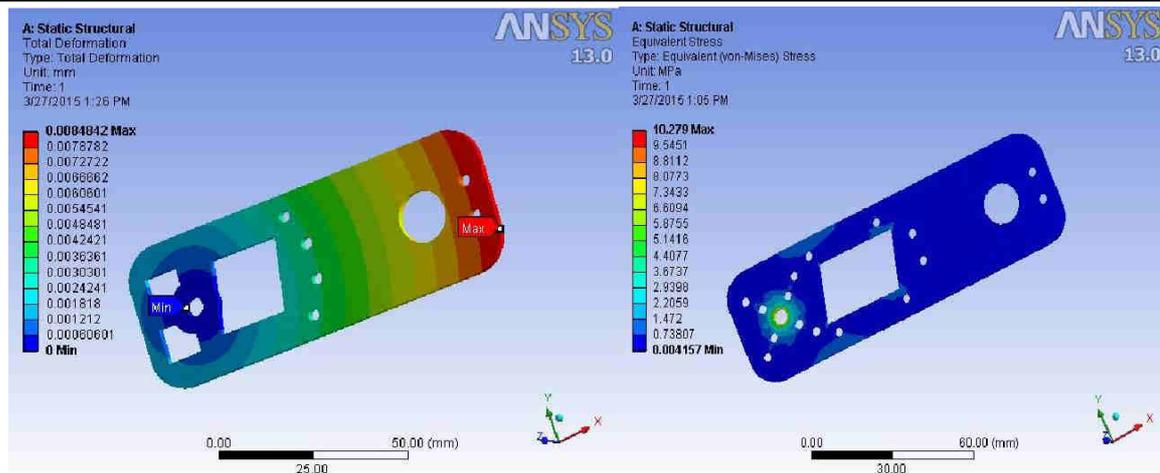


Fig.15: Total Deformation of Elbow

Fig.16: Stress on Elbow

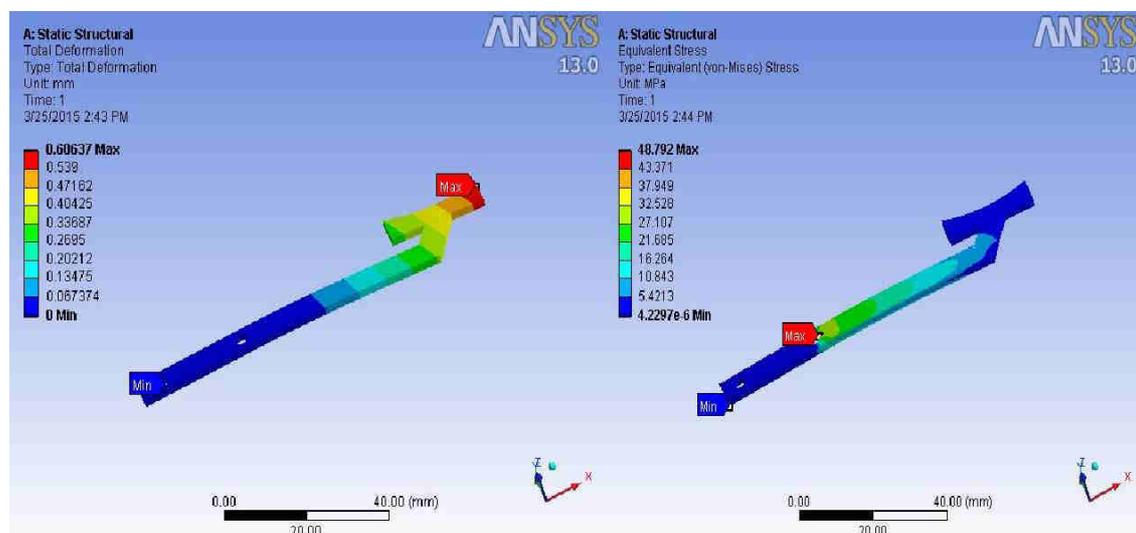


Fig.17: Total Deformation of Finger

Fig.18: Stress on Finger

VI. CONCLUSION

In this project we have modeled and analyzed a 4-DOF manipulator, it has been successfully completed. With reference to many available industrial manipulators and mobile platforms in market, a practical design for the manipulator has been perceived and computer aided designing tools like Solidworks, CATIA, Creo 1.0 and AutoCAD are being used to model the desired manipulator. Theoretical mechanism analysis of the inverse kinematics was carried out to calculate the end effectors position and orientation. For strength and FE Analysis is done by ANSYS software.

REFERENCES

- [1] Elias Eliot, B.B.V.L. Deepak, D.R. Parhi, and J. Srinivas, "Design & Kinematic Analysis of an Articulated Robotic Manipulator", Department of Industrial Design, National Institute of Technology Rourkela.
- [2] Sanjay Lakshminarayan, Shweta Patil, "Position

Control of Pick and Place Robotic Arm", Department of Electrical Engineering, MS Ramaiah Technology, Bangalore, India.

- [3] Mohamed Naufal Bin Omar, "Pick and Place Robotic Arm Controlled By Computer", Faculty of Manufacturing & Engineering, April 2007.
- [4] Ankit Gupta, Mridul Gupta, Neelakshi Bajpai, Pooja Gupta, Prashant Singh, "Efficient Design & Implementation of 4-Degree of Freedom Robotic Arm", International Journal of Engineering and Advanced Technology (IJEAT) ISSN: 2249 – 8958, Volume-2, June 2013.
- [5] B.O. Omijeh, R. Uhumwangho, M. Ehikhamenle, "Design Analysis of a Remote Controlled Pick & Place Robotic Vehicle", International Journal of Engineering Research and Development, Volume 10, PP.57-68, May 2014