

TWIN BARGE-SPAR HYDRODYNAMIC INTERACTION ON FLOATOVER DECK INSTALLATION

Fahmy Ardhiansyah¹ dan Norman Mahdar Sabana²

¹Master Student in Department of Naval Architecture and Shipbuilding Engineering, ITS Surabaya

²Master Student in Department of Ocean Engineering, ITS Surabaya

Email: fahmyardhiansyah@gmail.com

Diterima: 1 Nopember 2016; Direvisi: 10 Nopember 2016; Disetujui: 1 Desember 2016

Abstrak

Jurnal ini berisi tentang instalasi *floatover* sebuah *heavy weight topside deck* pada fasilitas terapung minyak dan gas. Dalam penelitian ini bangunan apung yang ditinjau adalah SPAR dengan diameter 25m x tinggi 100 m dan 5m sarat air yang akan ditempatkan pada lokasi tertentu dengan tinggi gelombang signifikan (H_s) mencapai 3 meter, periode gelombang (T_p) bervariasi antara 6s sampai 10s, kecepatan arus 0.4 m/s, dan kecepatan angin 26 knots. Dengan pendekatan teknis secara benar maka konsep instalasi *floatover* dapat dilakukan daripada menggunakan metode instalasi *heavy lift*. Analisa *floatover* telah dilakukan menggunakan perangkat lunak MOSES dan hasilnya menunjukkan jenis instalasi ini dapat dikerjakan sebagai alternatif yang bagus untuk instalasi *topside* pada fasilitas terapung lepas pantai. Hasil untuk kondisi ekstrem saat instalasi menunjukkan nilai maksimum RMS *roll*, *pitch*, dan *heave* adalah 1.11 degree, 1.13 degree, dan 0.057g secara berurutan. Nilai maksimum tersebut terjadi saat tahap instalasi *docking stage*.

Kata kunci: Interaksi Hidrodinamis, Floatover, Instalasi Deck

Abstract

This paper presents floatover installation of heavy weight topside deck onto floating oil & gas platform. In this study the floating structure considered was a 25m diameter x 100m SPAR hull with 5 meter draft that would be located in specified sea state with significant wave height (H_s) is up to 3.0 meter, peak period (T_p) is varied 6s to 10s, 0.4 m/s surface current speed, and 26 knots wind speed condition. With an appropriate technical justification, floatover concept has been carried on instead of heavy lift installation method. The floatover analysis is done by utilizing MOSES suite program, and the result shown this kind of installation method could be done as a good option for install a topside structure of a floating facility in offshore. The results for extreme installation condition show that the maximum RMS roll, pitch, and heave is 1.11 degree, 1.13 degree, and 0.057g respectively. Thus maximum results occurred during docking stage installation.

Keywords: Hydrodynamic Interaction, Floatover, Deck Installation

INTRODUCTION

The facility discussed in this paper is to be located in Eastern Indonesian water namely South Arafuru Sea. It's about approximately 500 km away north from, northern Australia, Darwin. Hydrocarbon field development would be develop by INPEX as part of ABADI field development. At the moment the issue are still focused in FLNG (Floating Liquefied Natural

Gas) facility. In near future the issued should spread to support this field development. The author think is a good to study for another development options, especially by using of SPAR hull to support of field development. Main focused within this study is discussed regarding floatover deck installation method.

SPAR hull will be located in deep water where the kinds of floating facility should be install. The water

depth at the SPAR location is approximately 600 meter. By looking the field location layout its can be categorized that this area is an open water which is the proposed location shall have affected by Indian Ocean. The topside weight was estimated at 20,000 tons at this initial study. With this condition, a proper selection of installation method which is technically and economically favorable became a great challenge.

In 2006, the first floatover deck was installed on a Spar platform: the Kikeh Spar. This installation was performed in 1320 m water depths in the South China Sea, offshore East Malaysia. The deck weight was 4000 tons and the swell at the time of installation was Hs of 0.7m at periods of 7 - 8 seconds. This was also the first catamaran type floatover performed in open waters (D. Edelson et.al, 2008).

At the another side in the South China Sea, this would be the first time to install a topside over 20,000 tons, for float-over, this would be the first time to install a topside with such heavy weight in an open water area with a near 200 meter water depth worldwide. Therefore, the study needed to answer the questions whether the topside is feasible to be installed by either lifting or float-over method, and any potential existing risk shall be resolved (Jinlin et.al, 2013).

RESEARCH OBJECTIVE

The research objective is to determine the hydrodynamic interaction between installation barge and spar floating facility during floatover deck installation operation. With a proper hydrodynamic interaction response, designer will recognize the highest response from several floatover installation stages

ANALYSIS METHODOLOGY

Offshore platforms are manufactured in fabrication yards and then transported to their offshore site location for installation. Topside deck structures are installed above jacket / spar structures using either heavy lift or float-over methods. Heavy lifting installations are always constrained by the capacity of the heavy lifting barges and their availability, which makes them uneconomical for heavy deck installations. Float-over provides an attractively cost effective way to install offshore decks, especially when the deck weight exceeds available crane lifting capacity (Khaled et.al, 2014).

PETROFAC (2016) has been carried on regarding the economical point of view comparing the installation method between floatover and heavy lift. The items to be compared are maximum capacity, hull weight, and so on to specialized engineering requirement. It can be noted that the floatover method need relatively high in engineering but can reduce cost consumption, in the opposite site the heavy lift vessel method is no need of engineering with a high cost consumption.

Dockwise marine contractor has been evaluated the past floatover operation in order to develop new concept for a proposed an installation vessel (Dockwise, 2008). The present pontoon barge method are have some prospect and constraint. The prospect are no slot required for fixed jacket, suitable for SPAR buoys, one successful installation for fixed jacket by ODL for Corocoro WHP project, one successful installation for Kikeh SPAR project by Technip. And the constraint are required a transfer operation prior to installation and not suitable for long distance sea voyage under pontoon barge configuration.

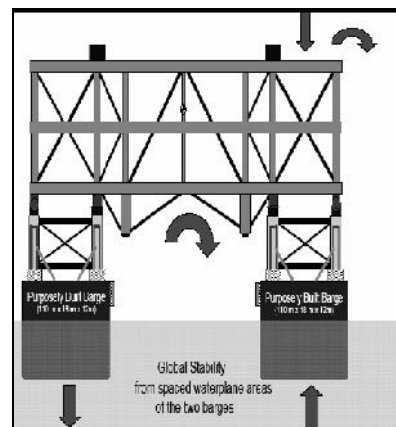


Figure 1. Proposed Installation Barge Size of: 110 m x 18 m x 12 m

Figure 1 shows the proposed installation barge to fulfill current floatover challenges. Pontoon barge improvements method are means to loadout directly onto two pontoon barges at fabrication yard; purposely built pontoon barges; suitable for transportation under harsh environments; suitable for both fixed and floating platforms.

The floatover installation are limited by the maximum allowable loads acting at the topside deck and substructure stabbing points, also the Leg Mating

Unit (LMU), Deck Support Structure (DSU), mooring system, and interface between barge and substructure. Significant wave height (H_s) and peak period (T_p) are the most importance for workability calculation. The calculations of the allowable sea-state condition should consider the following effects: wave height and period, direction of wave and sea swells, seasonal and tidal effects.

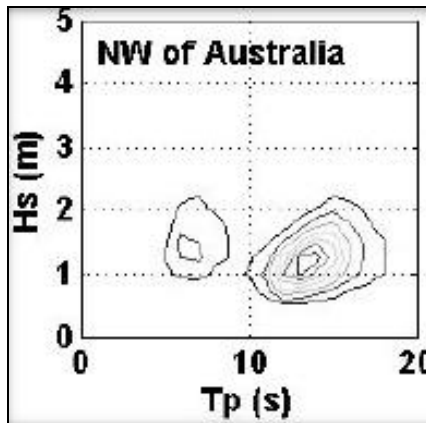


Figure 2. Distribution of H_s and T_p (W.Zhang et.al, 2013)

Since Arafuru Sea is close to NW of Australia and the lack of official Metocean data in this study, so Author would apply this weather data as the study parameter. As seen the distribution of H_s and T_p in NW of Australia has a wide range of period, almost more than 10s, ranging from 10s to 19s. The ranging of wave height are from 0.8m to 2.3m. Therefore, this field are categorized as swell environments locations. As kind of swell environments has some critical factor that shall be consider during mating operation.

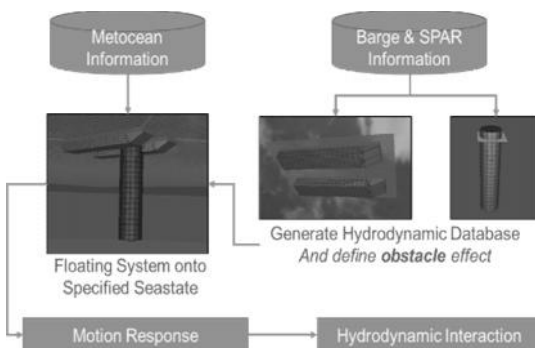


Figure 3. Hydrodynamic Interaction Analysis Methodology

In this study analysis methodology was adopted from J.Ray McDermott engineering (Kocaman, 2008). In the analysis of the floatover operation, the vessel motions and the resulting loads in the LMU, DSU, and mooring lines need to be estimated. For most motion analysis software the vessel hull needs to be defined as a collection of panel plates. The topsides can be modeled as a rigid body. The program needs to have means to connect the topsides and the vessel using rigid and flexible connector members, as well as the mooring lines. The analysis program then has to put all the components together:

1. The barge will be connected to the seafloor by mooring wires
2. The barge will be connected to the jacket using mating lines, or fenders if a tight slot method is being considered
3. The topsides will be connected to the barge using rigid connector simulation
4. DSU will contain vertical gap spring and lateral spring element to simulate a frictional surface between the topsides and the barge
5. The topsides will be connected to the jacket using LMUs
6. LMUs will have a nonlinear gap spring element considering mating cone and receptor geometry and ability to generate side loads.

To predict the motions and related connector loads, 3D time domain analysis can be used, modeling the floatover system as three independent rigid bodies with different types of connectors. For the hydrodynamic calculation, 3D diffraction method is applicable. Figure 3 is presented the general methodology to obtained hydrodynamic interaction.

By applying wave, wind, and current environment, the motions of the bodies under study (in this case, the floatover vessel and the topsides) and the forces in the connectors can be predicted. Statistical analysis of the results provide the upper, lower, and nominal values and, thereby, the design basis.

SPAR main dimension is 25m diameter x 100m depth by 95m draft, as seen in Figure 4 shows the two stages to be analyzed in this paper. The floatover scenario are taken in to two stages, first is docking stage and the second stage is mating stage. These two condition is believed the most critical phase in floatover installation method. Effective and efficiency of time consuming of numerical simulation also one of the consideration when take this two stages selection.

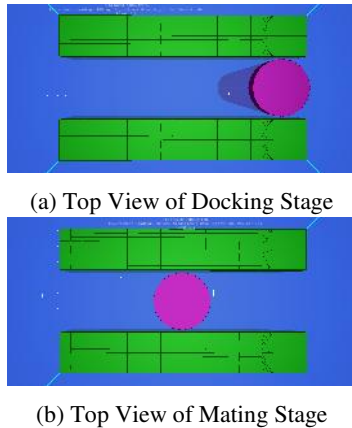


Figure 4. Two Stages to be considered in Numerical Analysis

Forty-five (45) loadcases to be computed for each stage, its mean the total loadcases is ninety (90) loadcases to be computed for two stages that considered in analysis. The loadcase is combination of significant wave height (H_s), heading angles, and peak period (T_p). The significant wave height are varied by 1m, 2m, and 3m. Then the heading angles increment is 45deg from following sea, quarter-stern sea, beam-sea, quarter-bow sea, and head sea of barge respectively. And the last combination in wave peak period (T_p) varied from 6s, 8s, and 10s.

RESULT AND DISCUSSION

An extracted result for relative heave motion between barge and SPAR when wave coming from beam is presented in Figure 5. In those figure several relative motion is presented by significant wave height 1 meter, 2 meter, and 3 meter respectively. As expected the highest response is occurred when the significant wave height is high as well. Furthermore the relative heave motion when wave coming from bow is presented in Figure 6 by significant wave height 1 meter, 2 meter, and 3 meter respectively.

In this floatover analysis obtain a result that present the floating system response during docking stage and mating stage of floatover installation process. From the results indicated that highest response occurred in docking stage rather than mating stage. However the difference between those two is has slight difference. More result are presented in Table 1 and Table 2 for docking stage and mating stage respectively. As a sample the twin barge maximum RMS roll motion during docking stage is 1.11 degree,

compare to mating stage is 1.02 degree.


In summary we now can conclude, from hydrodynamic interaction simulation it's obtained the vertical motion for mating stage as below: The heave acceleration is present in unit of g (gravity) rather than m/s^2 , which 1g is equal to $9.81 m/s^2$.

A. Docking Stage

- $H_s = 1$ meter
 - Maximum RMS Roll (degree) = 0.390
 - Maximum RMS Pitch (degree) = 0.370
 - Maximum RMS Heave (g) = 0.020
- $H_s = 2$ meter
 - Maximum RMS Roll (degree) = 0.760
 - Maximum RMS Pitch (degree) = 0.750
 - Maximum RMS Heave (g) = 0.038
- $H_s = 3$ meter
 - Maximum RMS Roll (degree) = 1.110
 - Maximum RMS Pitch (degree) = 1.130
 - Maximum RMS Heave (g) = 0.057

B. Mating Stage

- $H_s = 1$ meter
 - Maximum RMS Roll (degree) = 0.350
 - Maximum RMS Pitch (degree) = 0.370
 - Maximum RMS Heave (g) = 0.017
- $H_s = 2$ meter
 - Maximum RMS Roll (degree) = 0.690
 - Maximum RMS Pitch (degree) = 0.740
 - Maximum RMS Heave (g) = 0.034
- $H_s = 3$ meter
 - Maximum RMS Roll (degree) = 1.020
 - Maximum RMS Pitch (degree) = 1.120
 - Maximum RMS Heave (g) = 0.052

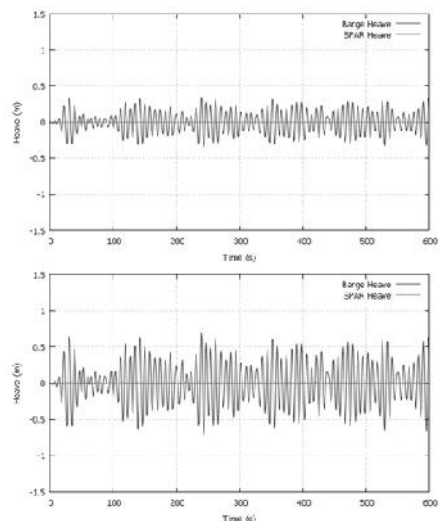

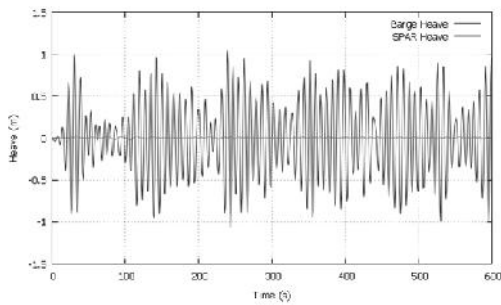


Figure 5. Relative Heave Motion Wave Coming from Beam

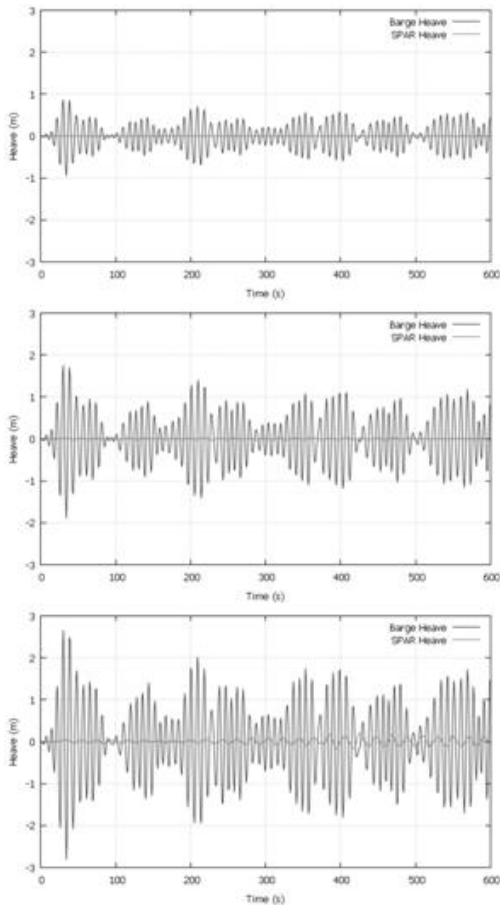


Figure 6. Relative Heave Motion Wave Coming from Bow.

As expected the result indicated that installation process would be better for lower significant wave height condition. In term of motion response of floating structure, all results are seem good due to the

maximum roll, pitch, and roll motion is quite small even in rough environment $H_s=3.0$ m. However in term of structural integrity of topside structure and LMU in the SPAR hull, its need to do further study for the structural strength itself.

The floatover analysis is done by utilizing MOSES suite program, and the result shown this kind of installation method would be a good option for install a topside structure of a floating facility in offshore.

CONCLUSION

Finally now we conclude that a twin barge installation vessel for SPAR topside deck is a good option for floatover offshore operation instead of using heavy lift vessel which is consequences in costly operation.

The performance of twin barge has been numerically investigated using MOSES software package and proved that this method has a wider operability sea state.

ACKNOWLEDGEMENT

Author would like to thanks to the Bentley Engineering Inc. for provide an academic license of MOSES software to ITS Surabaya for academic and research purpose

REFERENCES

- D. Edelson, M. Luo, J. Halkyard, D. Smiley. (2008). Kikeh Development: Spar Topside Floatover Installation. *OTC 19639*.
- Dockwise. (2008). Float-Overs: What's Present and What's Next.
- Jinlin Hou, Qian (Ken)Tang and Lian Xu. (2013). Installation Method Selection for Heavy Weight Topside in the South China Sea. *ISOPE*.
- Khaled A. Geba , Yousri M. A. Welaya, Heba W. Leheta and Yehia A. Abdel-Nasser. (2014). Motion and Structural Analysis of Floaters Float-over during the Mating Operation. *ISOPE*.
- Kocaman, Alp. (2008). Overcoming Float-Over Challenges. *Offshore Magazine*, 68.
- PETROFAC. (2016). Floatover Installation -Overcoming the Constraints.
- W. Zhang, P.E., C. Jeong, Ph. D., A.v. Spreken, . (2013). Float-over Feasibility in Brazilian Sea Water. *OTC 24304*.

Table 1. Motion Response at Docking Stage

Run	Hs (m)	heading (deg)	Period (s)	RMS Motion of Twin Barge						RMS Acceleration of Twin Barge							
				X (m)	Y (m)	Z (m)	RX (deg)	RY (deg)	RZ (deg)	A-X (m.s ⁻²)	A-Y (m.s ⁻²)	A-Z (g)	A-RX (rad.s ⁻²)	A-RY (rad.s ⁻²)	A-RZ (rad.s ⁻²)		
1	1	0	6	9.73	0.00	0.01	0.00	0.31	0.00	0.04	0.00	0.17	0.017	0.00	0.19	0.00	
2			8	9.05	0.00	0.01	0.00	0.34	0.00	0.05	0.00	0.17	0.017	0.00	0.17	0.00	
3			10	9.76	0.00	0.01	0.00	0.28	0.00	0.04	0.00	0.12	0.012	0.00	0.12	0.00	
4		45	6	10.41	0.01	0.01	0.08	0.22	0.00	0.03	0.01	0.12	0.012	0.06	0.14	0.00	
5			8	8.59	0.02	0.01	0.12	0.23	0.00	0.04	0.01	0.14	0.014	0.05	0.12	0.00	
6			10	9.49	0.02	0.01	0.14	0.19	0.00	0.04	0.01	0.10	0.010	0.05	0.08	0.00	
7		90	6	0.94	0.07	0.00	0.39	0.04	0.00	0.01	0.05	0.10	0.010	0.31	0.03	0.00	
8			8	4.13	0.06	0.00	0.34	0.06	0.00	0.01	0.03	0.07	0.007	0.20	0.03	0.00	
9			10	3.36	0.05	0.00	0.30	0.05	0.00	0.01	0.03	0.06	0.006	0.14	0.02	0.00	
10		135	6	10.47	0.03	0.01	0.16	0.21	0.00	0.03	0.03	0.15	0.015	0.15	0.14	0.00	
11			8	8.64	0.03	0.01	0.15	0.29	0.00	0.04	0.02	0.13	0.013	0.10	0.14	0.00	
12			10	5.01	0.03	0.01	0.16	0.24	0.00	0.04	0.01	0.10	0.010	0.07	0.09	0.00	
13		180	6	10.54	0.00	0.01	0.00	0.25	0.00	0.03	0.00	0.19	0.019	0.00	0.16	0.00	
14			8	9.49	0.00	0.01	0.00	0.37	0.00	0.05	0.00	0.17	0.017	0.00	0.17	0.00	
15			10	6.62	0.00	0.01	0.00	0.31	0.00	0.05	0.00	0.12	0.012	0.00	0.12	0.00	
16		2	0	6	12.60	0.00	0.02	0.00	0.62	0.00	0.07	0.00	0.33	0.034	0.00	0.39	0.00
17				8	12.01	0.00	0.04	0.00	0.68	0.00	0.10	0.00	0.34	0.035	0.00	0.33	0.00
18	10			12.27	0.00	0.03	0.00	0.56	0.00	0.09	0.00	0.24	0.025	0.00	0.23	0.00	
19	45		6	12.98	0.03	0.02	0.15	0.44	0.00	0.06	0.02	0.23	0.024	0.13	0.27	0.00	
20			8	12.03	0.04	0.03	0.24	0.47	0.00	0.08	0.02	0.28	0.028	0.11	0.24	0.00	
21			10	12.20	0.05	0.03	0.28	0.39	0.00	0.07	0.02	0.20	0.021	0.09	0.17	0.00	
22	90		6	3.66	0.13	0.01	0.76	0.09	0.01	0.02	0.10	0.20	0.020	0.59	0.06	0.01	
23			8	10.08	0.12	0.01	0.67	0.13	0.01	0.02	0.07	0.14	0.015	0.39	0.06	0.01	
24			10	9.22	0.10	0.02	0.59	0.09	0.01	0.01	0.05	0.12	0.013	0.28	0.04	0.00	
25	135		6	13.16	0.05	0.02	0.31	0.42	0.00	0.07	0.05	0.30	0.031	0.29	0.28	0.00	
26			8	11.68	0.05	0.03	0.30	0.57	0.00	0.09	0.03	0.26	0.026	0.19	0.27	0.00	
27			10	9.70	0.05	0.03	0.31	0.47	0.00	0.08	0.02	0.19	0.019	0.14	0.19	0.00	
28	180		6	13.33	0.00	0.03	0.00	0.49	0.00	0.06	0.00	0.38	0.038	0.00	0.32	0.00	
29			8	12.48	0.00	0.04	0.00	0.75	0.00	0.10	0.00	0.34	0.035	0.00	0.35	0.00	
30			10	10.17	0.00	0.04	0.00	0.63	0.00	0.09	0.00	0.24	0.024	0.00	0.24	0.00	
31	3		0	6	13.56	0.00	0.05	0.00	0.93	0.00	0.11	0.00	0.50	0.051	0.00	0.58	0.00
32				8	11.26	0.00	0.08	0.00	1.04	0.00	0.15	0.00	0.52	0.053	0.00	0.51	0.00
33		10		13.29	0.00	0.07	0.00	0.84	0.00	0.14	0.00	0.37	0.038	0.00	0.36	0.00	
34		45	6	14.66	0.04	0.04	0.23	0.67	0.00	0.09	0.03	0.35	0.036	0.19	0.41	0.00	
35			8	11.57	0.06	0.07	0.36	0.72	0.01	0.13	0.03	0.42	0.043	0.16	0.36	0.01	
36			10	13.15	0.07	0.06	0.42	0.59	0.01	0.11	0.02	0.31	0.031	0.14	0.25	0.00	
37		90	6	8.28	0.20	0.02	1.11	0.13	0.02	0.04	0.15	0.30	0.030	0.86	0.08	0.02	
38			8	11.35	0.18	0.03	1.00	0.19	0.02	0.02	0.10	0.22	0.022	0.58	0.09	0.02	
39			10	11.47	0.15	0.03	0.88	0.14	0.01	0.02	0.07	0.19	0.019	0.42	0.06	0.01	
40		135	6	14.56	0.08	0.05	0.45	0.63	0.01	0.10	0.07	0.46	0.047	0.42	0.43	0.00	
41			8	12.60	0.08	0.06	0.45	0.87	0.01	0.14	0.05	0.39	0.040	0.29	0.41	0.00	
42			10	11.50	0.08	0.05	0.47	0.71	0.01	0.11	0.04	0.29	0.029	0.21	0.28	0.00	
43		180	6	14.49	0.00	0.06	0.00	0.73	0.00	0.09	0.00	0.56	0.057	0.00	0.48	0.00	
44			8	13.65	0.00	0.09	0.00	1.13	0.00	0.15	0.00	0.51	0.052	0.00	0.52	0.00	
45			10	12.17	0.00	0.07	0.00	0.94	0.00	0.14	0.00	0.36	0.037	0.00	0.36	0.00	
Maximum				14.66	0.20	0.09	1.11	1.13	0.02	0.15	0.15	0.56	0.057	0.86	0.58	0.02	

Twin Barge-SPAR Hydrodynamic Interaction on Floatoaver Deck Installation
(Fahmy Ardhiyansyah dan Norman Mahdar Sabana)

Table 2. Motion Response at Mating Stage

Hs (m)	heading (deg)	Period (s)	RMS Motion of Twin Barge						RMS Acceleration of Twin Barge								
			X (m)	Y (m)	Z (m)	RX (deg)	RY (deg)	RZ (deg)	A-X (m.s ⁻²)	A-Y (m.s ⁻²)	A-Z (m.s ⁻²)	A-RX (g)	A-RY (rad.s ⁻²)	A-RZ (rad.s ⁻²)			
1	0	6	10.56	0.00	8.00	0.00	0.17	0.00	0.02	0.00	0.07	0.008	0.00	0.09	0.00		
		8	10.00	0.00	8.01	0.00	0.34	0.00	0.04	0.00	0.12	0.012	0.00	0.14	0.00		
		10	10.00	0.00	8.01	0.00	0.31	0.00	0.05	0.00	0.09	0.009	0.00	0.10	0.00		
		45	6	10.38	0.01	8.00	0.07	0.16	0.00	0.03	0.01	0.12	0.012	0.06	0.11	0.00	
			8	9.69	0.02	8.01	0.13	0.26	0.00	0.04	0.01	0.11	0.011	0.06	0.11	0.00	
			10	9.77	0.03	8.01	0.15	0.22	0.00	0.04	0.01	0.09	0.009	0.05	0.08	0.00	
		90	6	2.19	0.06	8.00	0.35	0.11	0.00	0.01	0.05	0.10	0.010	0.28	0.09	0.00	
			8	5.45	0.06	8.00	0.32	0.06	0.00	0.01	0.03	0.08	0.008	0.19	0.05	0.00	
			10	3.92	0.05	8.00	0.29	0.04	0.00	0.01	0.02	0.07	0.007	0.14	0.03	0.00	
	135	6	10.00	0.02	8.01	0.09	0.17	0.00	0.03	0.01	0.13	0.013	0.08	0.12	0.00		
		8	8.79	0.02	8.01	0.13	0.29	0.00	0.04	0.01	0.14	0.014	0.07	0.12	0.00		
		10	7.45	0.03	8.01	0.15	0.24	0.00	0.04	0.01	0.10	0.010	0.05	0.09	0.00		
	180	6	10.28	0.00	8.01	0.00	0.19	0.00	0.02	0.00	0.14	0.014	0.00	0.12	0.00		
		8	9.69	0.00	8.01	0.00	0.37	0.00	0.05	0.00	0.17	0.017	0.00	0.16	0.00		
		10	8.74	0.00	8.01	0.00	0.32	0.00	0.05	0.00	0.12	0.012	0.00	0.11	0.00		
	2	0	6	13.20	0.00	8.00	0.00	0.33	0.00	0.04	0.00	0.15	0.015	0.00	0.19	0.00	
			8	12.23	0.00	8.02	0.00	0.68	0.00	0.08	0.00	0.23	0.024	0.00	0.28	0.00	
			10	12.85	0.00	8.03	0.00	0.61	0.00	0.09	0.00	0.18	0.018	0.00	0.20	0.00	
			45	6	13.16	0.02	8.01	0.14	0.31	0.00	0.05	0.02	0.24	0.024	0.11	0.22	0.00
				8	12.21	0.05	8.02	0.26	0.51	0.01	0.08	0.02	0.22	0.023	0.12	0.22	0.00
				10	12.45	0.05	8.02	0.30	0.45	0.01	0.07	0.02	0.17	0.017	0.10	0.16	0.00
			90	6	8.50	0.12	8.01	0.69	0.21	0.01	0.03	0.10	0.20	0.021	0.54	0.17	0.01
				8	9.99	0.11	8.02	0.64	0.12	0.01	0.02	0.07	0.16	0.016	0.37	0.09	0.01
				10	9.54	0.10	8.02	0.57	0.08	0.01	0.01	0.05	0.13	0.013	0.27	0.06	0.00
135		6	12.80	0.03	8.02	0.18	0.35	0.00	0.06	0.03	0.26	0.026	0.16	0.24	0.00		
		8	10.93	0.05	8.04	0.27	0.57	0.00	0.09	0.02	0.28	0.028	0.13	0.25	0.00		
		10	10.76	0.05	8.03	0.30	0.48	0.00	0.07	0.02	0.20	0.021	0.10	0.17	0.00		
180		6	13.12	0.00	8.03	0.00	0.39	0.00	0.05	0.00	0.28	0.028	0.00	0.25	0.00		
		8	12.76	0.00	8.05	0.00	0.74	0.00	0.10	0.00	0.34	0.034	0.00	0.31	0.00		
		10	11.47	0.00	8.04	0.00	0.64	0.00	0.09	0.00	0.24	0.025	0.00	0.22	0.00		
3		0	6	14.49	0.00	8.01	0.00	0.50	0.00	0.06	0.00	0.22	0.022	0.00	0.28	0.00	
			8	14.10	0.00	8.05	0.00	1.02	0.00	0.13	0.00	0.35	0.035	0.00	0.42	0.00	
			10	14.01	0.00	8.06	0.00	0.92	0.00	0.14	0.00	0.27	0.028	0.00	0.31	0.00	
			45	6	14.50	0.04	8.02	0.21	0.47	0.00	0.08	0.03	0.36	0.037	0.17	0.33	0.00
				8	13.89	0.07	8.05	0.40	0.77	0.01	0.12	0.03	0.33	0.034	0.17	0.34	0.01
				10	13.77	0.08	8.05	0.45	0.67	0.01	0.11	0.03	0.26	0.026	0.14	0.24	0.01
			90	6	10.41	0.18	8.02	1.02	0.32	0.02	0.04	0.14	0.31	0.031	0.79	0.26	0.02
				8	11.81	0.17	8.03	0.96	0.18	0.02	0.02	0.10	0.24	0.025	0.55	0.14	0.02
				10	11.50	0.15	8.04	0.86	0.12	0.01	0.02	0.07	0.20	0.020	0.40	0.09	0.01
	135	6	14.09	0.05	8.05	0.27	0.52	0.00	0.08	0.04	0.38	0.039	0.23	0.36	0.00		
		8	13.21	0.07	8.09	0.40	0.86	0.01	0.13	0.04	0.42	0.043	0.20	0.38	0.00		
		10	12.68	0.08	8.07	0.45	0.72	0.01	0.11	0.03	0.30	0.031	0.15	0.26	0.00		
	180	6	13.99	0.00	8.06	0.00	0.58	0.00	0.07	0.00	0.41	0.042	0.00	0.37	0.00		
		8	14.01	0.00	8.12	0.00	1.12	0.00	0.15	0.00	0.51	0.052	0.00	0.47	0.00		
		10	13.61	0.00	8.10	0.00	0.97	0.00	0.14	0.00	0.37	0.037	0.00	0.33	0.00		
	Maximum			14.50	0.18	0.09	1.02	1.12	0.02	0.15	0.14	0.51	0.052	0.79	0.47	0.02	

[Halaman Kosong]