

Performance Evaluation of An Innovative-Vapor-Compression-Desalination System

¹Mirna R. Lubis and ²Mark T. Holtzaple

¹Chemical Engineering Department, Engineering Faculty, Syiah Kuala University
Jl. Syech Abdurrauf No. 7, Darussalam, Banda Aceh, 23111

²Artie McFerin Department of Chemical Engineering TAMU, College Station, Texas

¹Email: m.lubis06@fulbrightmail.org

Abstract – Two dominant desalination methods are reverse osmosis (RO) and multi-stage flash (MSF). RO requires large capital investment and maintenance, whereas MSF is too energy-intensive. Innovative system of vapor compression desalination is proposed in this study. Comprehensive mathematics model for evaporator is also described. From literature study, it is indicated that very high overall-heat-transfer coefficient for evaporator can be obtained at specific condition by using dropwise condensation in the steam side, and pool boiling in the liquid side. Smooth titanium surface is selected in order to increase dropwise condensation, and resist corrosion. To maximize energy efficiency, a cogeneration scheme of a combined cycle consisting of gas turbine, boiler heat recovery, and steam turbine that drives compressor is used. The resource for combined cycle is relatively too high for the compressor requirement. Excess power can be used to generate electricity for internal and/or external consumptions, and sold to open market. Four evaporator stages are used. Evaporator is fed by seawater, with assumption of 3.5% salt contents. Boiling brine (7% salt) is boiled in low pressure side of the heat exchanger, and condensed vapor is condensed in high pressure side of the heat exchanger. Condensed steam flows at velocity of 1.52 m/s, so that it maximize the heat transfer coefficient. This unit is designed in order to produce 10 million gallon/day, and assumed it is financed with 5%, 30 years of passive obligation. Three cases are evaluated in order to determine recommended condition to obtain the lowest fixed capital investment. Based on the evaluation, it is possible to establish four-stage unit of mechanical vapor compression distillation with capital \$31,723,885.

Keywords: Desalination, dropwise condensation, heat exchanger, StarRotor compressor, vapor compression distillation.

Introduction

Desalination aims to produce potable water from seawater, brackish water, or treated waste water. Among water treatment technologies, it is one of the most efficient thermal distillation processes used to reduce the broadest range of water contaminant. Mechanical vapor compression is modern method that produces potable water with acceptable energy efficiency (Ejjeh, 2001). Following World War II, the vapor compression distillers were used in oil production in remote area. Larger unit could produce 200,000 gallons per day. The installations had four identical units operating in parallel. The original design had one rotor fitted with a set of blades having the inducer section in a single piece. The up-graded design is based on two rotors housing the inducer blades allowing for more efficient configuration. A number of modifications have been incorporated on the shroud, vapor ducts, diffusion section, instrumentation, and the number of evaporators to improve the performance.

Sheet-shell heat exchanger is key technology in the mechanical-vapor-compression-desalination system. The heat exchanger consists of new assembly, which combines conventional *plate-and-frame* appearance and *shell-and-tube* heat exchanger. The heat exchanger could be used in order to exchange sensible heat as well as latent heat. Latent heat exchanger could be part of multi effect evaporator that operates at lower temperature and pressure. Alternatively, the evaporator could be part of vapor compression evaporator. Multi effect evaporator used operates at lower pressure and temperature. Steam from high pressure evaporator boils water in adjacent low pressure. The compressor draws vapor from the low pressure evaporator, forces, and returns it to high pressure evaporator. The salt water has to be degassed before it is fed into evaporator.

Low pressure steam from steam turbine discharge could be added to evaporator where pressure from discharged steam and the evaporator is the most suitable. While overall heat transfer coefficient is obtained, the heat exchanger's surface could be known, and also the cost. The disadvantages of the mechanical vapor compression system (Al-Juwayhel, 1997) include use of high electrical energy, flow rate limitations on the vapor compression range, maintenance and spare part requirements. The disadvantage limits the use of the mechanical vapor compression

system in countries with limited fossil, nuclear, or hydro. It also limits the operation of the mechanical vapor compression system to low brine temperature. This results in a larger heat transfer area for the heat exchanger, which increases the energy requirement, and therefore the investment cost. Because the critical cost parameter is fixed cost (amortization) and energy cost (Anonymous, 2000), this research focus is in order to reduce energy requirement by introducing multi-effect evaporator, and developing new latent heat exchanger. Holtzaple and Noyes (2004) arrange system illustrated in their Disclosure of Invention (Figure 1). Degassed feed is fed to evaporator that operates at the highest pressure (Evaporator 4). The system uses "combined cycle" machine, consisting of gas turbine (Brayton cycle) and steam turbine (Rankine cycle). Waste heat from gas turbine is used to make steam, so that it strengthens the steam turbine. Both gas turbine and steam turbine will strengthen the compressor.

Holtzaple and Noyes (2004) have arranged new sheet shell heat exchanger (Lubis, 2011) as used in this research. The configuration has short diagonal cut that enables the formation of small peak. At high pressure chamber, the baffle causes flow area more decreased, which enables relatively constant velocity through the heat exchanger. The flow finally compress out gasses that are condensable. Channel number per pass is selected in order to achieve low pressure drop. In low pressure chamber, liquid enters from bottom part, and boils because of heat exchange through the wall. Vapor resulted exits from the top.

For high pressure side of sheet-shell heat exchanger, the objective is in order to produce dropwise condensation. This could be increased by using titanium layers toward carbon steel as proposed in this research, surface coated by gold (Griffith and Lee, 1967) or titanium plate (Rose, 1967). Titanium surface also reduce impurities and avoid corrosion because of seawater (Rose, 1967). Holtzaple and Noyes (2004) targets $\Delta T = 5.56^\circ\text{C}$ as temperature difference in every heat exchanger of vapor compression evaporator. An extensive review on this matter (Haslego and Polley, 2002) shows that this number is suitable temperature difference. Furthermore, literature (O'Bara *et al.*, 1967) suggested average velocity of 1.52 m/s at high-pressure steam side.

Experiment conducted by Dollof *et al.* (1969) indicated influence of pressure (and vapor temperature) on heat transfer coefficient of steam side. O'Bara, Killian, and Roblee also indicated that $\Delta T_s = 2.3^\circ\text{C}$, large heat transfer coefficient is obtained at vapor velocity around 1.52 m/s. Ruckenstein and Metiu (1965) have used a model to estimate heat transfer coefficient for dropwise condensation on solid surface. Their model considers heat moved through drops and film, which dynamically break the solid surface. The heat transfer coefficient is proportional to drop fraction toward total area and thermal conductivity of liquid film as much of 0.3934 Btu/(h·ft·°F). Based on study that has been carried out, this research is aimed to analyze performance of a desalination system that has been designed by considering all designed data above and consists of four evaporators in order to determine capital investment of saturated steam compression. Over the past several years, the cost of desalting still cannot compete with the cost of fresh water that it requires minimal treatment to make it potable. Though many methods have been proposed to desalt seawater, only a few have been developed commercially. Therefore, the investment proposed in this research is expected to be able to give contribution to production of a unit of potable water with low cost.

Materials and Methods

Degassed seawater is fed to evaporators that relate in parallel in order to obtain evaporator temperature requirement (Figure 1). The flow is between 147.5 kg/s and 144.57 kg/s. Four evaporator stages are used, each with various $\Delta T = 2, 4, 6^\circ\text{F}$ and 7% brine ($S = 70 \text{ g/kg}$). This S is substituted in activity formula (Emerson and Jamieson, 1967) as follows:

$$\log_{10}(p/p_0) = hS + jS^2 \quad (1)$$

where;

- p = vapor pressure of salt water
- p_0 = vapor pressure of water
- h = -2.1609×10^{-4}
- j = -3.5012×10^{-7}
- S = salinity (70 g salt/kg seawater)

Figure 2 shows the nomenclature to identify temperature and pressure of each stage of the evaporator. In order to ensure dropwise condensation, maximum pressure at steam side is set as much of 827.4 kPa gauge (120 psig). This value was chosen to give agreement with results obtained by other investigators (Dolloff *et al.*, 1969). Saturated steam is fed to the first stage at 120 psig (176.7°C) and recovered from the final stage at 158.63°C. For $\Delta T = 6^\circ\text{F}$, temperature at point C becomes 6°F less than temperature at point A, whereas vapor pressure of water is 8,471 atm from steam table.

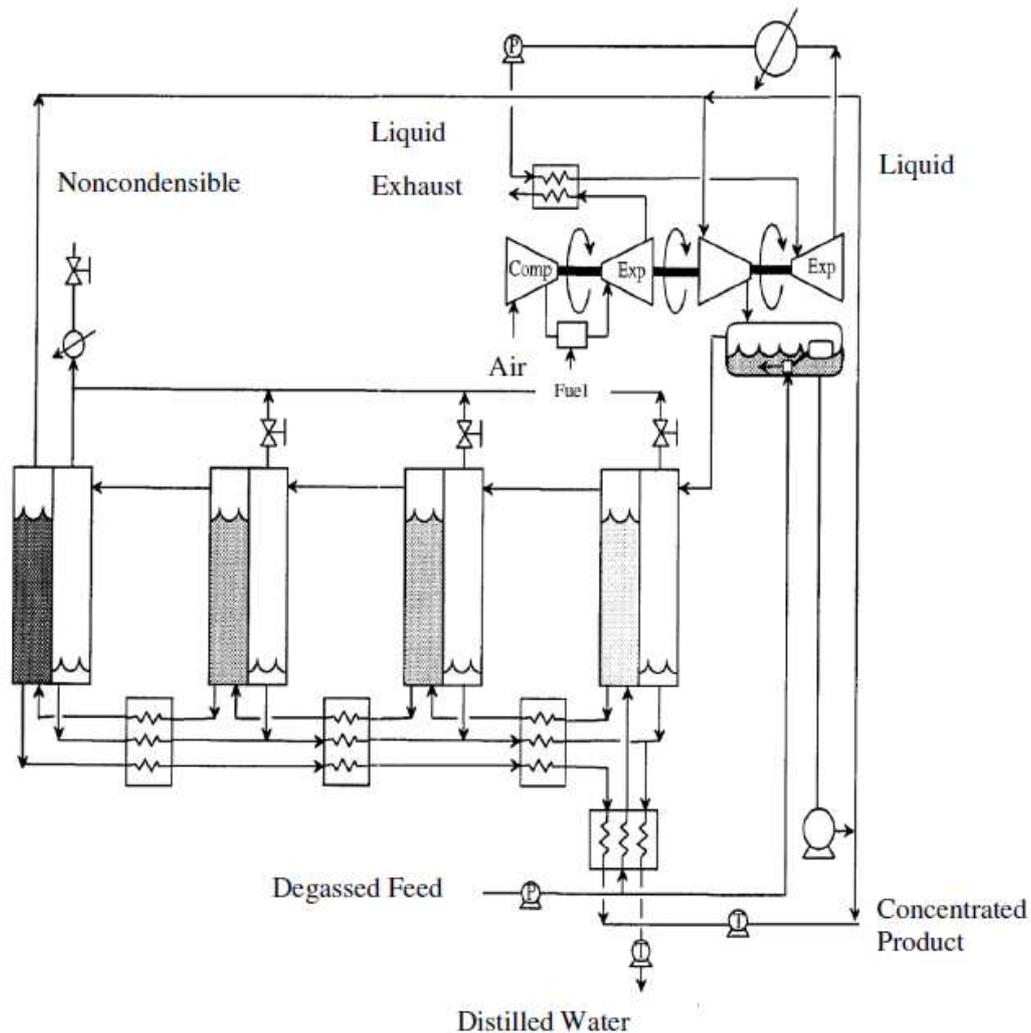


Figure 1. Desalination System (Holtzaple and Noyes, 2004)

Therefore, the pressure in point C can be calculated from equation 1. The pressure obtained is the same as the pressure at point A in stage 2. Similarly, pressure and temperature in each stage can be determined for each temperature difference. The flow rate is calculated for every evaporator as required by production. Estimated range of seawater temperature is 21.1 – 26.2°C. The number of condensation as required by flow rate or production is calculated in accordance with mass balance. The seawater feed is 3.5% salt ($x_f = 35 \text{ g/kg}$) and the following brine concentration (x_b) is obtained: 20, 50, 70, dan 100 g/kg. The fouling factor is not available (the surface is assumed clean by raising brush balls. The heat transfer coefficient is around 0.14 MW/(m² · K). In this experiment, sea water moves at velocity of 1.52 m/s in gauge tubes 3/4 in, with condensing steam at the outside. The material construction code is API-ASME code.

Titanium plate surface with thickness of 0.007 in is used in order to achieve dropwise condensation, the evaporator is constructed with elastomeric gasket, and carbon steel vessel coated with epoxy or titanium layers to protect it from corrosion on seawater side. The distance of center to center among adjacent plates is 0.25 inch. Standard plate dimension is 2.4 m × 2.4 m. Vessel shell thickness is 29.6 mm. It is based on recommended design equation for a vessel under internal pressure (Peters *et al.*, 2003) as follows:

$$t = \frac{P \cdot r_i}{S_m \cdot E_j - 0.6P} + C_c \quad (2)$$

where;

P = Maximum allowable pressure = 910.1 kPa

r_i = Inside radius of shell before corrosion allowance is added = 2 m

S_m = Maximum allowable working stress (88.350 kPa for carbon steel SEA J412)

E_j = Efficiency of joints = 0.85 (spot examined joints)

C_c = Allowance for corrosion = 0

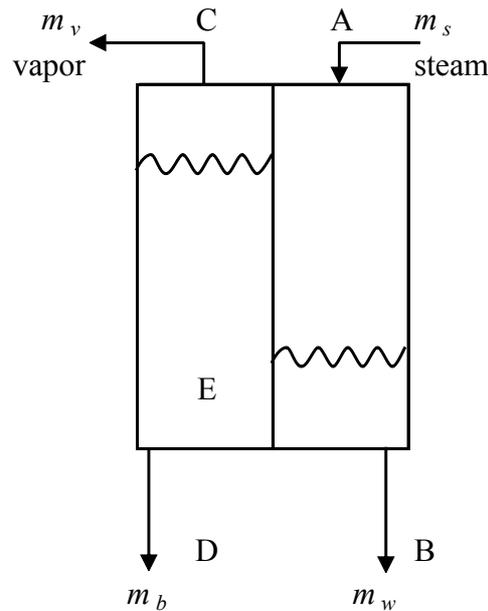


Figure 2. Flows in latent heat exchanger

The sensible heat exchanger for the evaporator inlet flow and the entering seawater feed is divided in two parts: one corresponds to the sensible heat exchanger between the exiting distillate and 50% of the seawater feed, and the other corresponds to the sensible heat transfer between the exiting brine and 50% of the seawater feed. To determine the price of the sensible heat exchanger, first a mass balance and an enthalpy balance are performed for each evaporator. The data are used to compute both the sensible heat exchanger area and the latent heat exchanger area. For dry centrifugal compressor, isentropic compressor work is calculated as follows:

$$W = \frac{\frac{k}{k-1} p_1 v_1 \left[\left(\frac{p_2}{p_1} \right)^{\frac{k-1}{k}} - 1 \right]}{\eta_c} = \frac{H_2 - H_1}{\eta_c} \quad (3)$$

where;

W = compressor work (J/kg)

p_1 = input compressor pressure (Pa)

p_2 = output compressor pressure (Pa)

v_1 = specific volume of steam at compressor inlet (m^3/kg)

k = isentropic constant = $C_p / C_v = 1.3$ or steam

H_2 = specific enthalpy of compressor exit (J/kg)

H_1 = specific enthalpy of compressor inlet (J/kg)

η_c = isentropic efficiency of compressor = 0.85 (assumed)

Work supplied to the compressor increases the pressure and temperature. The compressor is relatively small at flow that is passed, so that it is adiabatic, it means a small number of energy is lost while heat exchange is out of the compressor. The objective is in order to increase gas pressure by using work as less as possible, which is possibly completed by making the compression process reversible. Work required in reversibly isothermal compression is less than that carried out in reversibly adiabatic compression. If the steam temperature is maintained close to the suction temperature by injecting water, the process becomes close to isothermal. Conventional centrifugal compressor does not enable water injection because high velocity blades could be damaged because of collision with the drops. Therefore, this research uses StarRotor compressor that operates at lower velocity and has strong component that could be resistant to liquid injection. StarRotor compressor uses gerotor that is positive shear apparatus. For water injection case, compressor work W is calculated (Holtzapple and Noyes, 2004) as follows:

$$W = \frac{(1+x)H_2^{vap} - (H_1^{vap} + xH_2^{liq})}{\eta_c} \quad (4)$$

where;

H_2^{vap} = vapor enthalpy at compressor output (2) (J/kg)

H_1^{vap} = vapor enthalpy at compressor input (1) (J/kg)

H_2^{liq} = liquid enthalpy at compressor input (J/kg)

η_c = compressor efficiency = 0.85 (assumed)
 x = the amount of water injection that evaporates in compressor.

$$x = \frac{S_1^{vap} - S_2^{vap}}{S_2^{vap} - S_1^{liq}} \quad (5)$$

where;

S_1^{liq} = entropy of liquid water at compressor inlet (J/(kg·K))
 S_1^{vap} = entropy of steam at compressor inlet (J/(kg·K))
 S_2^{vap} = entropy of steam at compressor exit (J/(kg·K))

Gas turbine is used in order to supply the compressor and generator work requirement. The Mars® gas turbine is selected because it has been engineered for very high reliability and durability as well as ease of maintenance. Like Solar's other gas turbine families, Mars gas turbines are available for compressor, generator, and mechanical-drive applications. The gas turbine power output is 11,190 kW with fuel requirements of 10,600 kJ/kWh. Steam turbine is selected according to the steam turbine operating conditions such as inlet temperature steam at 673.15 K and 4.2403 MPa, outlet temperature steam at 319.26 K and 0.010135 MPa. After an isentropic expansion, the saturated vapor quality can be calculated as follows:

$$x = \frac{S_l - S_{2l}}{S_{2v} - S_{2l}} \quad (6)$$

where;

x = saturated vapor quality
 S_l = entropy of superheated steam (kJ/(kg·K))
 S_{2l} = entropy of saturated liquid (kJ/(kg·K))
 S_{2v} = entropy of saturated steam (kJ/(kg·K))

The energy recovered from the steam turbine is as follows:

$$W = m(H_{1t} - H_{2t})\eta_{turb} \quad (7)$$

where;

W = energy recovered from steam turbine
 H_{1t} = enthalpy of superheated steam (kJ/kg)
 $H_{2t} = xH_{2v} + (1 - x)H_{2l}$ (kJ/kg)

Therefore the total power for the proposed combined-cycle system is power from gas turbine added by power from steam turbine. To determine the price of Heat Recovery Boiler and Pumps, both are selected to handle a total of 0.876 m³/s of seawater (3.5% concentrated feed). This rate is based on distilled flow produced i.e. 50% of the seawater feed or 10,000,000 gallons/day (3.45 × 10⁶ lb_m/h or 0.4356 m³/s). The shaft work of each pump is calculated as follows:

$$W_p = \frac{Hm_v}{\eta_{pump}\rho_{seawater}} \quad (8)$$

where;

- W_0 = shaft work (kW)
- H = total dynamic head (kPa)
- m_p = mass flow rate (kg/s)
- $Q_{\text{seawater}} = 1,021.90 \text{ kg/m}^3$
- $\eta_{\text{pump}} = \text{pump efficiency} = 0.85$

Distillate and brine discharges from the sensible heat exchanger do not need pumping. Even though both flows lose pressure in the heat exchanger, they still can flow out. The discharge pressure required is the sum of the pressure drop in the sensible heat exchanger plus the vapor pressure in the latent heat exchanger. The price is obtained from Reference (Ettouney *et al.*, 2002). All pumps receive a correction factor of 1.6 because the pressure exceeds 1,035 kPa. In addition, a factor of 1.26 is used for anti-corrosion material for all pumps used in the seawater environment. Based on design and formula of the desalination system, performance and the capital cost are analyzed while producing water as much of 10 million gallon/day.

Results and Discussion

Figure 3 indicates overall heat transfer coefficient that is accordance with condensation temperature and temperature difference of heat transfer, ΔT , between condensing steam side and boiling liquid side. Overall heat transfer coefficient U approaches optimal maximum value 53,585 Btu/(h·ft²·°F) at overall temperature difference $\Delta T = 6^\circ\text{F}$. Even though high heat transfer coefficient value could be obtained in theory, constant value of 24,900 Btu/(h·ft²·°F) has been used in technical design. To verify this value, an investigation is being prepared by the author.

Data presented in this research is obtained by using 10 million gal/day of seawater feed. This unit has heat exchanger sheets that are made of titanium 0.007 inch. Data obtained from this research results in heat transfer coefficient value (U) that is suitable to analytical estimation. Once the overall heat transfer coefficient is obtained, the area of the heat exchanger can be known and consequently its cost. Because of the low temperature differential, the compression energy cost is low. The unit has been used sporadically. Testing this unit with tap water and sodium chloride solution 5000 ppm causes very thin scale layers of calcium carbonate precipitates in vaporizing side of the rotors of the last two effects. There is no effort is made in order to separate scale from the surface. High brine concentration in the last two effects also gives additional resistant to heat flow across the film solution as a result of viscosity increasing and thermal conductivity decreasing of the brine. This factor is believed to cause U values are a little lower than that predicted.

Figure 4 indicates system limit for overall energy balance. Compressor work (W) will enter to the system and go out as thermal energy that is brought out by distillate ($m_s C_{ps} (T_s - T_f)$) and the brine ($m_b C_{pb} (T_b - T_f)$).

Therefore, energy balance is:

$$W - (m_b C_{pb} (T_b - T_f)) - (m_s C_{ps} (T_s - T_f)) \quad (5)$$

$$W = m_b C_{pb} \Delta T_b - m_s C_{ps} \Delta T_s$$

Assume $\Delta T = \Delta T_b = \Delta T_s$,

$$W = m_b C_{pb} \Delta T - m_s C_{ps} \Delta T$$

$$W = (m_b C_{pb} - m_s C_{ps}) \Delta T$$

$$\frac{W}{m_s} = \left(\frac{m_b}{m_s} C_{pb} - C_{ps} \right) \Delta T$$

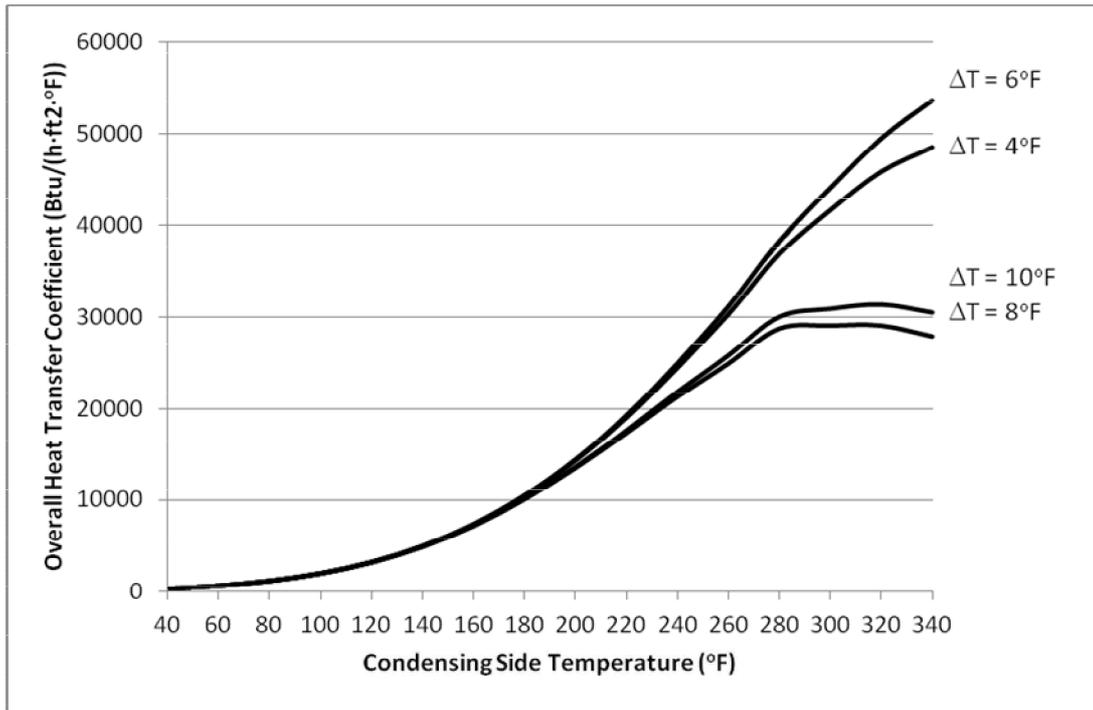


Figure 3. Calculated overall heat transfer coefficient

This temperature difference states temperature increasing of distillate and brine. In addition, this increasing is approached temperature in sensible heat exchanger. The temperature difference is proportional to W/m , the proportionality constant is indicated in Table 1. The result is observed so that at concentration of 7% and low ΔT (among 2 and 6°F), the work requirement of compressor shaft is between 14 and 29 MJ/m³ that is acceptable range. Compressor in this unit is centrifugal StarRotor compressor. It is selected because while compared to centrifugal compressor, StarRotor gerotor compressor has technical benefit as follows:

- StarRotor gerotor compressor is cheaper (\$450.000 vs \$3.000.000).
- StarRotor gerotor compressor could retain toward water injection that makes the compression close to isothermal that requires less work.
- StarRotor gerotor compressor could be designed in accordance with particular compression requirement.
- StarRotor gerotor compressor is efficient throughout broad range of operational condition.

The volumetric capacity is directly proportional to velocity and rather inversely proportional to pressure increasing because of back leakage of vapor in room between horse and its lobe. Three cases have been studied as indicated in Table 2.

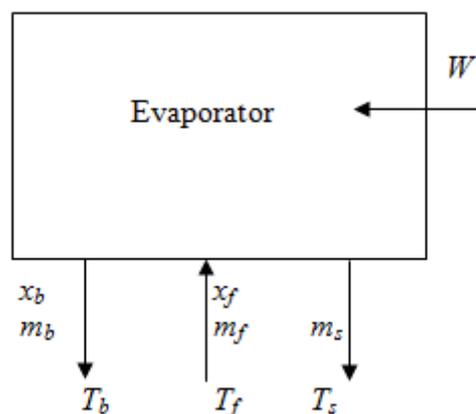


Figure 4. Overall energy balance

$$\text{Total mass balance: } m_s + m_b = m_f \quad (6)$$

$$\text{Salt mass balance: } m_f x_f = m_b x_b \quad (7)$$

Where;

$$m_f = m_b \frac{x_b}{x_f}$$

$$m_s + m_b = m_b \frac{x_b}{x_f}$$

$$m_s = m_b \frac{x_b}{x_f} - m_b$$

$$m_s = m_b \left(\frac{x_b}{x_f} - 1 \right)$$

$$1 = \frac{m_b}{m_s} \left(\frac{x_b}{x_f} - 1 \right)$$

Table 1. Proporsionality constant in temperature change equation

x_f (g/kg)	x_b (g/kg)	C_{pb} (kJ/(kg · K))	C_{ps} (kJ/(kg · K))	$\frac{1}{\left(\frac{x_b}{x_f} - 1 \right)} C_{pb} + C_{ps}$
35	50	3.917	4.209	0.07491
35	70	3.822	4.209	0.12450
35	100	3.689	4.209	0.16197
35	150	3.521	4.209	0.18937

$$\frac{m_b}{m_x} = \frac{1}{\left(\frac{x_b}{x_f} - 1\right)}$$

$$\frac{W}{m_x} = \left(\frac{1}{\left(\frac{x_b}{x_f} - 1\right)} C_{pb} + C_{pf}\right) \Delta T$$

$$\Delta T = \frac{1}{\left(\frac{1}{\left(\frac{x_b}{x_f} - 1\right)} C_{pb} + C_{pf}\right)} \left(\frac{W}{m_x}\right) \quad (8)$$

Table 2. Cases used in vapor compression

Cases	A	B	C
ΔT_{cond} (°F)	6	4	2
ΔT_{sens} (°F)	5.85	4.5	3.15
Salinity (g/kg)	70	70	70
Number of stages	4	4	4
Compressor energy (kJ/m ³ distillate)	28.873	20.329	14.320

Basically, input energy to compressor motor consists of energy lost in electrical motor, energy lost in steering belt, energy lost because of friction, and energy given to steam during compression. Figure 5 indicated compressor work for dry compressor at condenser temperature 176.7 °C as salinity function for six conditions: 0 °C, 1 °C, 2° C, 3 °C, 4 °C, and 5 °C. For every vapor compressed by compressor in 4-stage system, the unit produces 70 g/kg brine, so that at 6°F (3.3 °C) energy required by every product unit from the 4-stage unit is 30.2 kWh/thousand gallon (29 MJ/m³ distillate). The temperature is appropriate to reduce the energy because the lower condenser temperature, the higher compression energy required.

Figure 6 indicates compressor work for dry compressor at condenser temperature of 120°C. For 70 g/kg brine salinity produced at 3.3 °C, the compression work required is as much of 32.7 kWh/thousand gallon. Comparing the result to that at condenser temperature 176.7 °C, it is recommended to operate vapor compression unit at maximum temperature that is 176.7 °C in order to reduce compression energy. However, wet compressor has less work requirement, so that only wet compressor is assessed in Cases B and C. For case B, the work compressor is indicated in Figure 7. It is necessary to note here that a mechanical-vapor-compression unit of conventional single stage, and vapor compression unit of four stages that operate at the same temperature difference, compressor energy at multi stages is less than the energy in single stage because of salinity increasing in every stage compared to that of mechanical-vapor compression unit of conventional single stage. This fact indirectly states that work required by every product unit from four-stage vapor compression unit is less than that of conventional single-stage of mechanical-vapor-compression unit for the same ΔT value regardless the evaporator type. As example of work calculation, assume situation required in order to recover 93 percent of water from various feed salinity in mechanical-vapor-compression unit that operates at average temperature 176.7 °C. For simplicity and data availability on sea salt solution, the feed is assumed to have sea water composition. Then, the situation will need compression energy that can be calculated by using Equation 4 and the results are indicated in Figure 7.

For case C, correlation of number of stages to inlet volume of compressor is indicated in Figure 8. Inlet volume of compressor is in the range of 67.16 m³ vapor/m³ distillate up to 222.97 m³ vapor/m³ distillate. It seems here that the inlet volume of compressor is around 118.6 m³ vapor/m³ liquid and higher while the stage number is less than 2. This is caused by the fact that energy consumption by rotors descends as a result of the high condensate rate, and specific energy consumed by the rotors descends as indicated in Figure 9. Comparing Figure 9 to Figure 7, it is clear that for 4 stages, compressor shaft work at ΔT of latent heat exchanger 2 °F is less than that for single stage at $\Delta T = 4$ °F. However, it is not efficient to use the condition to operate unit of mechanical vapor compression distillation because the area of distillate sensible heat exchanger becomes larger. Figure 8 also indicates that for case C, it is not appropriate to use 4 stages because, it is clearly seen that the optimum condition to use minimum gas flow is while the number of stages is two.

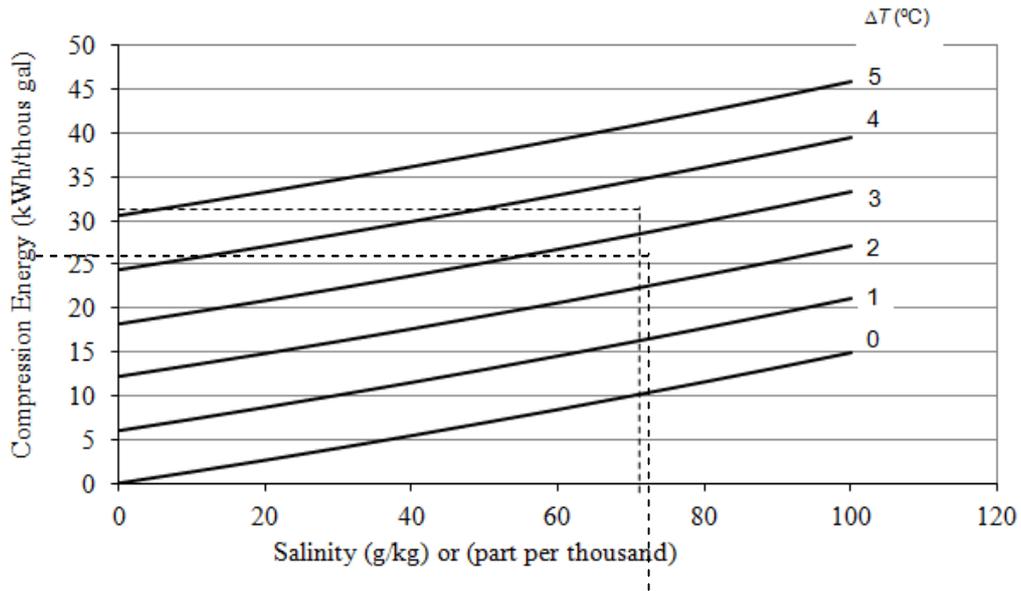


Figure 5. Compression work of desalination at condenser temperature of 176.7 °C

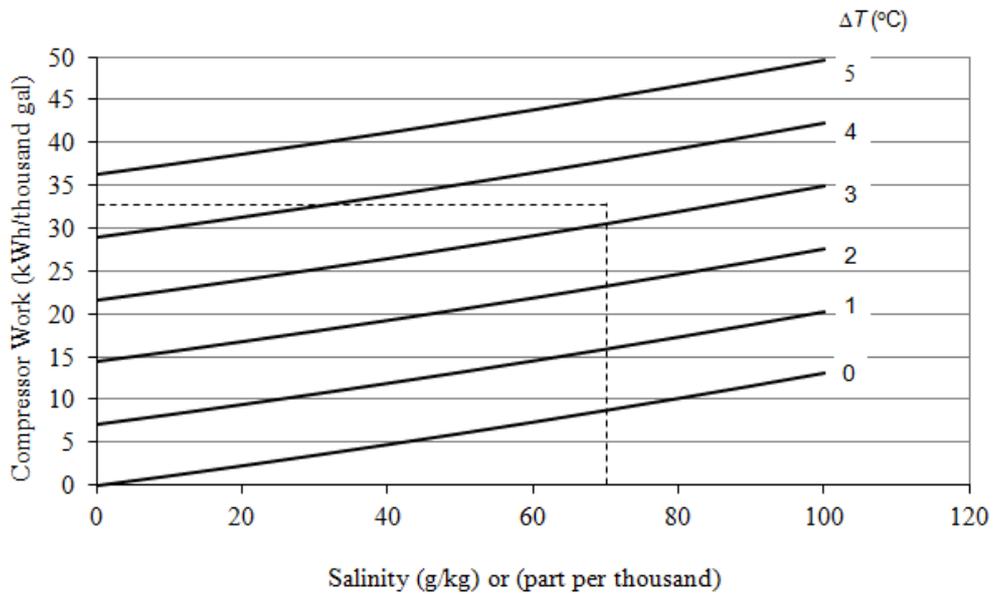


Figure 6. Compression work of desalination at condenser temperature 120 °C

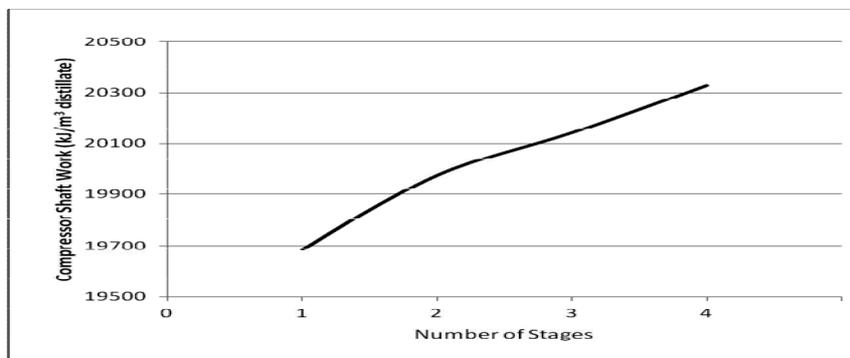


Figure 7. Work of wet compressor shaft (ΔT of latent heat exchanger = 4 °F, Seawater feed = 3.5%, Brine = 7%, Inlet T of heat exchanger = 174 °C)

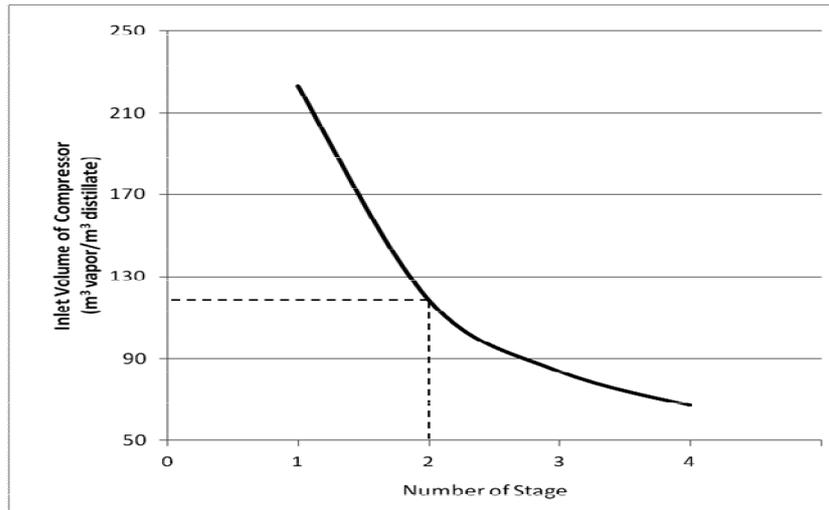


Figure 8. Gas flow at inlet compressor (ΔT of latent heat exchanger = 2 °F, Seawater feed = 3.5%, Brine = 7%, Inlet T of heat exchanger = 175.5 °C)

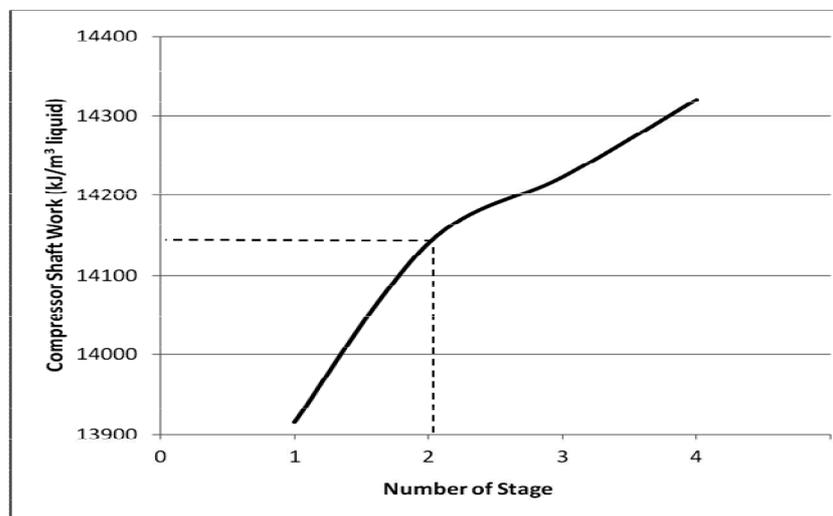


Figure 9. Work of wet compressor shaft (ΔT of latent heat exchanger = 2 °F, Seawater feed = 3.5%, Brine solution = 7%, Inlet T of heat exchanger = 446.53 K)

Figure 9 indicates correlation of number of stages to compressor work required to produce distillate water with brine concentration 70 g/kg seawater. For 4 stages, the compressor shaft work is as much of 14,320 kJ/m³, whereas for single stage, compressor work is as much of 13,915 kJ/m³. If rotor design is developed, and brine salinity is as much of 5%, specific energy consumption by the rotors calculated from equation 4 is believed to be able to achieve 11,535 kJ/m³ or less, and total specific energy consumption by compressor and the rotors will be lower while using seawater whose salinity is as much of 3.5%. However, the area of latent heat exchanger required for temperature difference of 2 °F is quite larger than that for temperature difference 4 °F, which means the condition becomes more costly. Therefore, fixed capital investment is calculated only for case B which is considered as the most efficient condition for the system. Table 3 summarizes equipment required in innovative vapor-compression-desalination unit for recommended case B. This table gives utility requirement for this unit operating. The unit consists of four latent heat exchangers, four sensible heat exchangers for brine and distillate, and four pumps. Table 3 also indicates Lang Factor component used as much of 5.19 in order to estimate total Project cost from equipment cost. However, factor 2.2 is generally used for total project cost, equipment cost, and pipeline installed in order to determine unexpected cost. The cost is not estimation because it is a base for fund proposal. The cost resource is in accordance with technical estimation.

Table 3. Summary of equipment and utility requirement for 10 million gallon/day of desalination unit

Code	Name	Description	Purchasing Cost (\$)	Utility		
				Natural gas (kJ/kWh)	Electricity (kW)	Cooling Water
L	Latent Heat Exchanger (4)	41,064 ft ²	290,324			
B	Sensible Heat Exchanger	218,939 ft ²	1,547,901			
D	Sensible Heat Exchanger	239,077 ft ²	1,690,277			
P	Seawater Pump (4)	Feed 1480 kPa 147.05 kg/sec	80,000		992.75	
GT	Gas Turbine		800,000	10,600	11,190	
DS	Degassing System		25,000			
C	Compressor		450,000		8,760	
ST	Steam Turbine		300,000		5,032	
G	Generator		110,000		7,714	
C	Condenser		19,000			0.198 m ³ /s
HRB	Heat Recovery Boiler (unburnt)		800,000			
Total Equipment			6,112,502			
Fixed Capital Investment = 5.19 × 6,112,502 = \$31,723,885						

Conclusions

In order to design the sensible heat exchanger, first mass balance and energy balance are carried out for every evaporator. According to literatur data, dropwise condensation at steam side and pool boiling at liquid side enables to obtain overall heat transfer coefficient up to 53,585 Btu/(h·ft²·°F) in specific working condition. To enable dropwise condensation, recommended steam velocity should not higher than 1.52 m/s, and steam pressure should not more than 828 kPa gauge. Design of innovative heat exchanger/evaporator has been analyzed so that it can be implemented in desalination system with capital \$31,723,885. This can be achieved by using thin sheet of titanium with smooth surface as its heat transfer surface. In addition, temperature difference as a result of flow across evaporator surface should be 4 °F.

Nomenclatures

- C_c - Allowance for corrosion = 0
- C_{ps} - Specific heat of distillate [J/(kg_m · K)] or [Btu/(lb_m · °R)]
- C_{pb} - Specific heat of brine [J/(kg_m · K)] or [Btu/(lb_m · °R)]
- E_j - Efficiency of joints = 0.85 (spot examined joints)
- H_1 - Specific enthalpy of compressor inlet (J/kg)
- H_2 - Specific enthalpy of compressor exit (J/kg)
- H_{1t} - Enthalpy of superheated steam (kJ/kg)
- H_1^{liq} - Liquid enthalpy at compressor inlet (1) (J/kg_m) or (Btu/lb_m)
- H_1^{vap} - Vapor enthalpy at compressor inlet (1) (J/kg_m) or (Btu/lb_m)
- H_2^{vap} - Vapor enthalpy at compressor exit (2) (J/kg_m) or (Btu/lb_m)
- b - Empirical constant = -2.1609×10^{-4}
- j - Empirical constant = -3.5012×10^{-7}
- k - Isentropic constant = $C_p / C_v = 1.3$ or steam
- m_b - Rate of exiting brine flow (kg/h) or (lb_m/h)
- m_f - Rate of seawater feed flow (kg/h) or (lb_m/h)
- m_s - Rate of steam flow and condensate (kg/h) or (lb_m/h)
- p - Vapor pressure of salt water at the same temperature (N/m²) or (psi)
- p_0 - Vapor pressure of water
- p_1 - Input compressor pressure (Pa)
- p_2 - Output compressor pressure (Pa)

P	- Maximum allowable pressure = 910.1 kPa
r_i	- Inside radius of shell before corrosion allowance is added = 2 m
S	- Salinity (g salt/kg seawater)
S_j	- Entropy of superheated steam (kJ/(kg·K))
S_{2l}	- Entropy of saturated liquid (kJ/(kg·K))
S_{2r}	- Entropy of saturated steam (kJ/(kg·K))
S_m	- Maximum allowable working stress (88.350 kPa for carbon steel SEA J412)
S_1^{liq}	- Entropy of liquid water at compressor inlet (J/(kg·K))
S_1^{vap}	- Entropy of steam at compressor inlet (J/(kg·K))
S_2^{vap}	- Entropy of steam at compressor exit (J/(kg·K))
T_b	- Boiling temperature of the seawater (K) or (°F)
T_f	- Temperature of the seawater feed (K) or (°F)
T_s	- Steam temperature (K) or (°R)
x	- Fraction amount of injection water that evaporates in the compressor
x_b	- Fraction amount of salt in brine
x_f	- Fraction amount of salt in seawater feed
ΔT	- Overall heat transfer temperature differential (K) or (°F)
ΔT_{cond}	- Overall heat transfer temperature differential in latent heat exchanger (K or °F)
ΔT_{sens}	- Overall heat transfer temperature differential in sensible heat exchanger (K, °F)
v_1	- Specific volume of steam at compressor inlet (m ³ /kg)
W	- Compressor work (J/kg)
W_t	- Energy recovered from steam turbine
x	- Saturated vapor quality
η_c	- Compressor efficiency

Acknowledgements

The writer gratefully thanks to Dr. Jorge Horacio Juan Lara Ruiz from Texas A&M University for all support and very valuable discussion regarding this research.

References

- Al-Juwayhel, F., El-Dessouky, H., and Ettouney, H. (1997). Analysis of single-effect evaporator desalination systems combined with vapor compression heat pumps. *Desalination*, 114: 253-275.
- Anonymous. (2000). Examining the economics of seawater desalination using the DEEP code. Technical Document 1186, International Atomic Energy Agency, Vienna, Austria.
- Anonymous. (2005). Solar turbines, mars 100 compressor Set. <http://mysolar.cat.com/cda/layout?m=41428&x=7>, 13 December 2007.
- Dolloff, J. B., Metzger, N. H., and Roblee, L. H. S. Jr. (1969). Dropwise condensation of steam at elevated pressures. *Chem. Eng. Sci.*, 24: 571-583.
- Ejjeh, G. (2001). Desalination, a reliable source of new water. International Desalination Association, Belgium.
- Ettouney, H. M., El-Dessouky, H. T., and Gowing, P. J. (2002). Evaluating the economics of desalination. *CEP magazine*, <http://cep magazine.org>, 31 December 2002.
- Emerson, W. H., and Jamieson, D. T. (1967). Some physical properties of sea water in various concentrations. *Desalination*, 3: 213-224.
- Griffith, P., and Lee, M. S. (1967). The effect of surface thermal properties and finish on dropwise condensation. *Int. J. Heat Mass Transfer*, 10: 697.
- Haslego, C., and Polley, G. (2002). Compact heat exchanger Part 1: Designing plate and frame heat exchangers, *CEP magazine*, <http://cep magazine.org>, 30 September 2002.
- Holtzapfel, M., and Noyes, G. (2004). Advanced vapor-compression evaporator and heat exchanger system. Disclosure of Invention, Department of Chemical Engineering, Texas A&M University.
- Lubis, M. R. (2011). Desalination using vapor-compression distillation. Lambert Academic Publishing, Germany.
- O'Bara, J. T., Killian, E. S., and Roblee, L. H. S. Jr. (1969). Dropwise condensation of steam at atmospheric and above pressures. *Chem. Eng. Sci.*, 22: 1305.
- Peters, M. S., Timmerhaus, K. D., and West, R. E. (2003). *Plant design and economics for chemical engineers*, 5th ed., McGraw Hill, New York, NY.
- Rose, J. W. (1967). On the mechanism of dropwise condensation. *Int. J. Heat Mass Transfer*, 10: 755.
- Ruckenstein, E., and Metiu, H. (1965). On dropwise condensation on a solid surface. *Chem. Eng. Sci.*, 20: 173.