



CO₂ Solubility in Electrolyte Solution of Potassium Carbonate with the Addition of Promotor Amines (MDEA-DEA/ PZ-DEA) at Various Temperatures

Saidah Altway, Kuswandi Kuswandi*, Iqwal Zulfetra & Firda Nuharani

Department of Chemical Engineering, Faculty of Industrial Technology
Institut Teknologi Sepuluh Nopember, Kampus ITS Sukolilo,
Surabaya 60111, Indonesia

*E-mail: kuswandi@chem-eng.its.ac.id

Abstract. Carbon dioxide has a huge impact on the increase of greenhouse gas formation causing global warming and climate change. The most effective method to capture CO₂ is chemical absorption using potassium carbonate (K₂CO₃) solution and amines as additive to enhance the absorption rate. CO₂ solubilities in 30% of K₂CO₃ and 5% of the total composition of mixed methyldiethanolamine (MDEA)–diethanolamine (DEA) / piperazine (PZ)-DEA solutions at various temperatures of 303.15-323.15 K and atmospheric pressure are reported. The solubility data were measured using an equilibrium cell apparatus with the N₂O analogy method. The E-NRTL model was used to correlate the experimental data accurately. The binary interaction parameters of the model for the CO₂-K₂CO₃-MDEA-DEA-H₂O and CO₂-K₂CO₃-PZ-DEA-H₂O systems were obtained. The CO₂ physical solubility in 30% of K₂CO₃, 5% of PZ, and 0% of DEA at 303.15 K had the highest value, while the Henry constant of CO₂ in this solution had the lowest value. The CO₂ loading increased with increasing partial pressure of CO₂, while the CO₂ solubility decreased with increasing temperature. Any increase in MDEA concentration from 0% to 5% enhanced the CO₂ partial pressure, otherwise, an increase in PZ concentration from 0% to 5% decreased the CO₂ partial pressure.

Keywords: amines; binary interaction parameter; CO₂ solubility; E-NRTL model; N₂O analogy.

1 Introduction

The increase of greenhouse gas in the atmosphere is the main cause of global warming and climate change in the world today. Herein, CO₂ is the most dominant cause. In the industrial sector, CO₂ gas is contained in flue gas produced by industrial equipment. The flue gas is carried to the stack and discharged into the atmosphere, which causes rising CO₂ levels and further causes global warming [1]. Indonesia is in the top 10 of the largest CO₂ emitters in the world, accounting for 2.31% of global CO₂ emissions via the energy sector and deforestation in 2014-2015 [2].

Received May 10th, 2015, 1st Revision April 21st, 2016, 2nd Revision November 28th, 2016, Accepted for publication December 16th, 2016.

Copyright ©2016 Published by ITB Journal Publisher, ISSN: 2337-5779, DOI: 10.5614/j.eng.technol.sci.2016.48.6.3

There are several methods that can be used to capture CO₂ from the gas stream. Chemical absorption is a technology that is well developed and has been applied in a variety of commercial processes [3]. Cullinane [4] found that the most effective solvent to capture CO₂ gas is alkanolamine and 'hot' K₂CO₃. Types of amine solvents that have been widely investigated are MEA, DEA, MDEA, TEA, PZ, AMP, and others [5-9].

The most important parameter to determine the equilibrium concentration in the liquid phase and the CO₂ absorption rate is the physical solubility of CO₂ [4,10]. These data are required as a reference for designing absorption columns for industry. Physical solubility of CO₂ in amine solvent cannot be measured directly due to a chemical reaction between CO₂ and amines. CO₂ reacts rapidly with amine so that the physical solubility cannot be determined [4,10]. Therefore, Clarke [11] used the nitrous oxide (N₂O) analogy method to estimate the solubility of CO₂ gas in amine solvent. Carbon dioxide and nitrous oxide have the same molecular structure, molecular interaction parameter, mass, and electron configuration. Therefore, the ratio of the CO₂ and N₂O solubilities (H_{CO_2} / H_{N_2O}) in organic solvent and water is assumed to be similar at the same temperature.

Several researchers [4,12-14] have indicated that the use of K₂CO₃ as solvent, which blends with amine as promotor, can improve the performance of K₂CO₃ and enhance the absorption rate. The objective of this study was to determine the CO₂ solubility in 30% of K₂CO₃ as solvent and 5% of MDEA-DEA/ PZ-DEA mixtures as promotor at various temperatures between 303.15 and 323.15 K and atmospheric pressure by an equilibrium cell apparatus with the N₂O analogy method. The experimental data were correlated using the E-NRTL model.

2 Experiment

2.1 Materials

MDEA and PZ with purity levels higher than 99% were purchased from Merck, Germany. DEA with purity level higher than 98% was purchased from Sigma-Aldrich, USA. Nitrous oxide with purity level higher than 99% and 20% CO₂-80% N₂ gas mixture were purchased from local company Trigases. Potassium carbonate with 99% purity was purchased from local company Bratachemical. The distilled water used in this study was provided by our laboratory. All materials were used without additional purification.

2.2 Experimental Apparatus and Procedures

The experiment of this study was conducted at 303.15-323.15 K and atmospheric pressure to obtain the solubility of CO₂ in 30% of K₂CO₃ solution and 5% of amine (MDEA-DEA) and (PZ-DEA) mixtures with the N₂O analogy method using an equilibrium cell apparatus. The apparatus used in this study was based on the apparatus used by Haimour and Sandall [10] and Al-Ghawas, *et al.* [15]. It has been described and validated in our previous study [16].

The solubility of N₂O in solution can be obtained from Eq. (1), in which $C_{N_2O}^*$ is the N₂O concentration at equilibrium.

$$H_{N_2O} = \frac{P_{N_2O}}{C_{N_2O}^*} \quad (1)$$

The partial pressure of N₂O is determined from the atmospheric pressure (total pressure measured), which is corrected with the vapor pressure of water [15].

The solubility of CO₂ can be estimated by the N₂O analogy method, as represented in Eq. (2), after the solubility of N₂O has been determined experimentally.

$$H_{CO_2} = H_{N_2O} \left(H_{CO_2}^{\circ} / H_{N_2O}^{\circ} \right) \quad (2)$$

The solubility of CO₂ in water, $H_{CO_2}^{\circ}$, and the solubility of N₂O in water, $H_{N_2O}^{\circ}$, are calculated from [17].

The CO₂ partial pressure can be calculated experimentally with Eq. (3) as follows:

$$P_{CO_2}^{\text{exp}} = H_{CO_2} \cdot C_{CO_2}^* \quad (3)$$

in which $C_{CO_2}^*$ is the CO₂ concentration dissolved in the solution at equilibrium.

The CO₂ concentration dissolved at equilibrium was determined by passing CO₂ gas into the equilibrium cell apparatus with the same method as in the N₂O experiment. Thus by titration, the concentration of each component in the solution can be obtained.

The E-NRTL model was used to correlate the experimental data. The E-NRTL model contains two contributions. The first one, developed from the local interactions, is determined by the NRTL model [18]. The other one, developed


from the long-range interactions, is calculated by the Pitzer-Debye-Huckel (PDH) model [19]. The activity coefficient (γ) of the E-NRTL model for each component has been described in previous researches [5,16,18]. The deviation of the CO₂ partial pressure calculated by the E-NRTL model from the experimental data can be determined with Eq. (4), as follows:

$$Deviation = \left(\frac{\sum_{i=1}^M \left(P_{CO_2}^{cal}(i) - P_{CO_2}^{exp}(i) \right) / P_{CO_2}^{exp}(i)}{M} \right) \times 100\% \quad (4)$$


3 Results and Discussion

The apparatus validation of this study was performed using water as solvent at 303.15-323.15 K. The validation was based on the previous studies by Versteeg and Swaaij [20], Li and Lai [21], and Al-Ghawas, *et al.* [15]. Validation of the apparatus has been done in our previous study [16]. The Henry constant of CO₂ in 30% of K₂CO₃, 5% of PZ, and 0% of DEA at 303.15 K had the lowest value. This indicates that the CO₂ physical solubility in this solution is the greatest of other compositions, as shown in Figures 1 and 2. Furthermore, these figures present the relationship between 1/T and the Henry constant of CO₂. The higher the value of 1/T, the lower the value of the H_{CO₂}. This means that an increase in temperature can enhance the value of the H_{CO₂}. The higher the value of the H_{CO₂}, the more difficult the CO₂ gas is absorbed in the solution. Thus, the physical solubility of CO₂ in the solution will be greater at lower temperature.

After the equilibrium was reached in the equilibrium cell, samples were taken for conducting a composition analysis. The compositions of carbonate (CO₃²⁻) and bicarbonate (HCO₃⁻) in the solution were analyzed by titration. The analysis of the HCO₃⁻ composition in the solution was conducted to determine the amount of CO₂ reacted. The amount of CO₂ absorbed is equal to the amount of CO₂ reacted and dissolved (did not react) in the solution. The reaction that occurs in the solution at equilibrium is shown in Eq. (5).



The formation of HCO₃⁻ in the solution will increase with the addition of promotor amine. The reaction between amine (MDEA) and CO₂ can be represented by Eq. (6),



Thus the amount of CO₂ reacted can be increased.

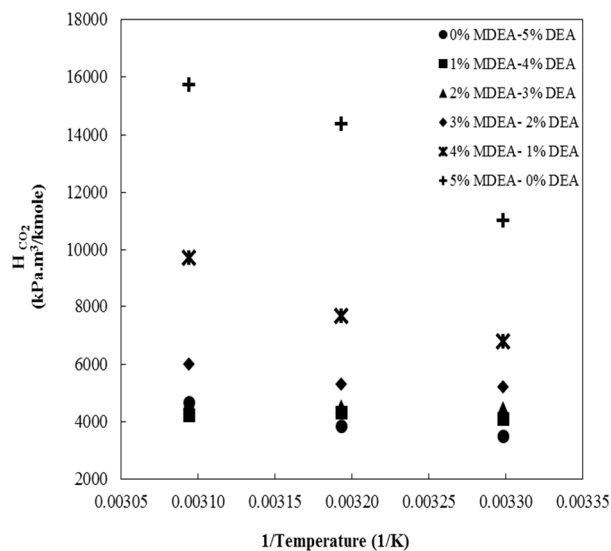


Figure 1 Physical solubility of CO₂ in 30% K₂CO₃, 0-5% MDEA, and 0-5% DEA at 303.15-323.15 K.

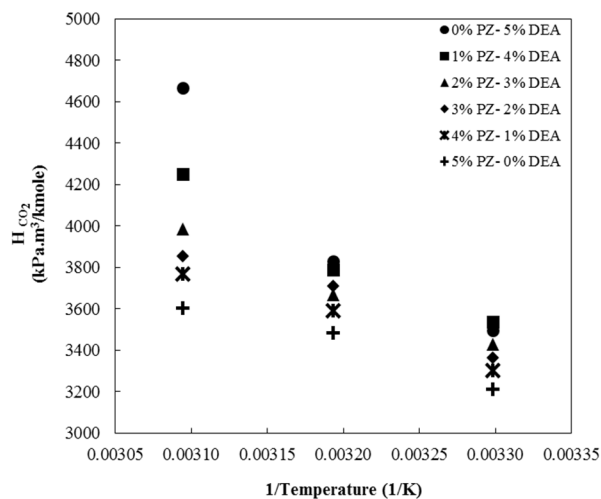


Figure 2 Physical solubility of CO₂ in 30% K₂CO₃, 0-5% PZ, and 0-5% DEA at 303.15-323.15 K.

Figures 3 to 6 show the relationship between temperature and amount of CO₂ reacted and CO₂ dissolved. The reacted CO₂ decreases with temperature increasing from 303.15 to 323.15 K.

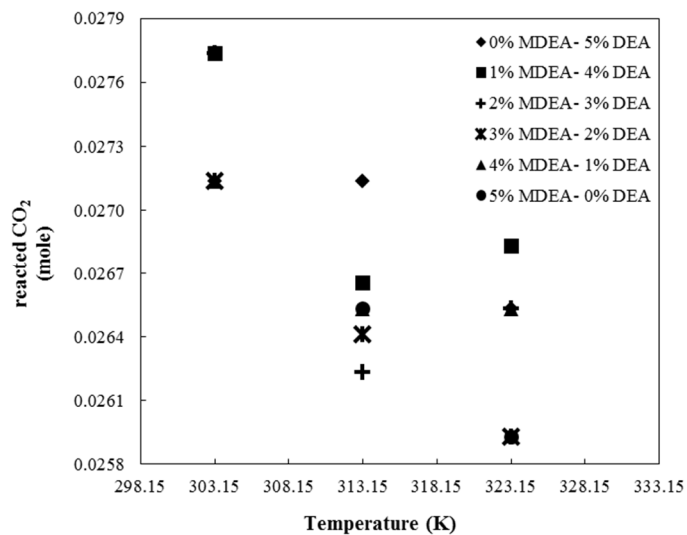


Figure 3 Amount of the CO₂ reacted in 30% K₂CO₃, 0-5% MDEA, and 0-5% DEA at 303.15-323.15 K.

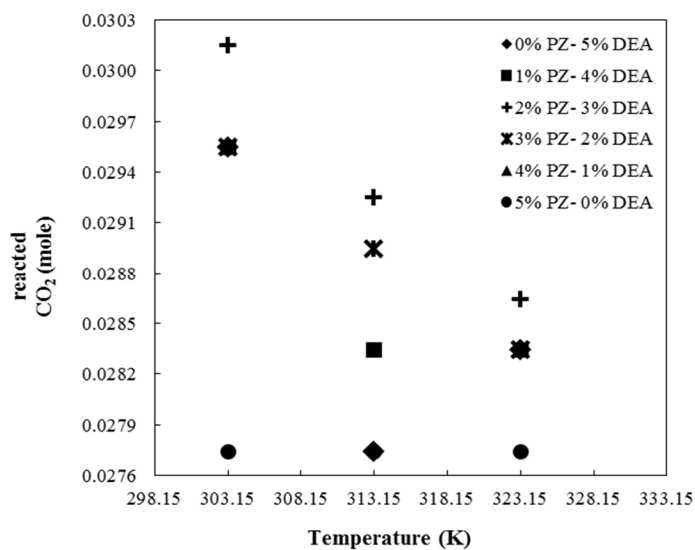


Figure 4 Amount of CO₂ reacted in 30% K₂CO₃, 0-5% PZ, and 0-5% DEA at 303.15-323.15 K.

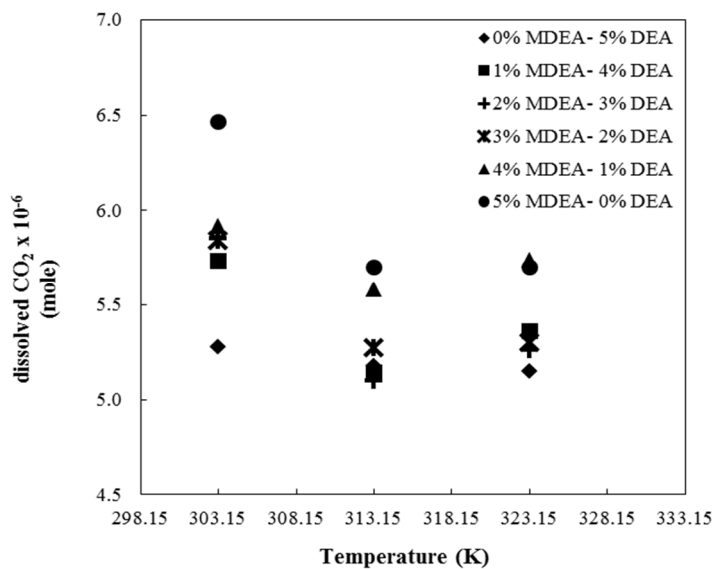


Figure 5 Amount of CO₂ dissolved in 30% K₂CO₃, 0-5% MDEA, and 0-5% DEA at 303.15-323.15 K.

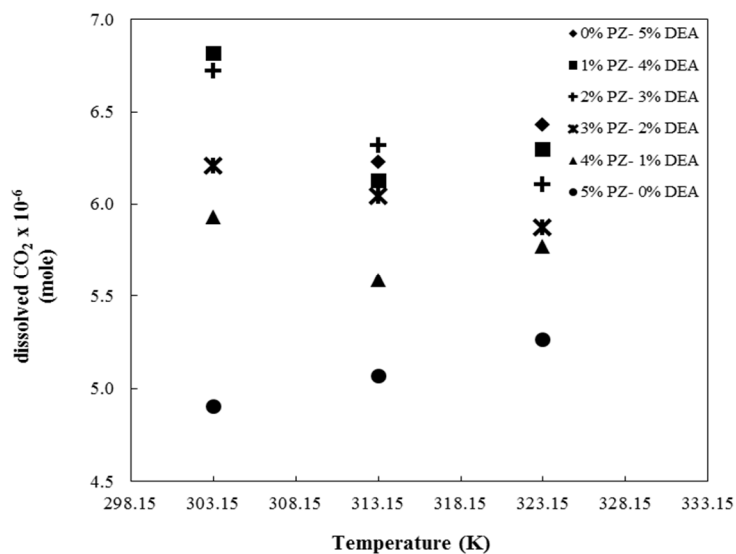


Figure 6 Amount of CO₂ dissolved in 30% K₂CO₃, 0-5% PZ, and 0-5% DEA at 303.15-323.15 K.

The increase in temperature can either increase or reduce the absorption rate of CO₂, depending on which factors are decisive. In this case, the solubility is the

more dominant factor. The CO_2 solubility decreases with increasing temperature. Consequently, the increase in temperature decreases the absorption rate of CO_2 . Furthermore, it decreases the amount of CO_2 absorbed, thus the amount of dissolved CO_2 and reacted CO_2 also decreases. It can also be seen that the amount of the reacted CO_2 in the K_2CO_3 -PZ-DEA- H_2O solution is greater than that in the K_2CO_3 -MDEA-DEA- H_2O solution. This indicates that the PZ-DEA mixture has the ability to react with CO_2 faster and to a higher degree than the MDEA-DEA mixture. The equilibrium constant (K) used by Austgen and Rocelle [22] was applied in this study to calculate the amount of dissolved CO_2 .

Based on Figures 7 and 8, the E-NRTL model can correlate well the experimental data for the CO_2 - K_2CO_3 -MDEA-DEA- H_2O and CO_2 - K_2CO_3 -PZ-DEA- H_2O systems with a deviation of 8.82% and 2.53% respectively. This shows that an increase in CO_2 partial pressure increases CO_2 loading. The CO_2 loading can be determined from the ratio of the total amount of absorbed CO_2 to the amount of K^+ and amines in the solution. The greater the CO_2 loading, the greater the amount of absorbed CO_2 .

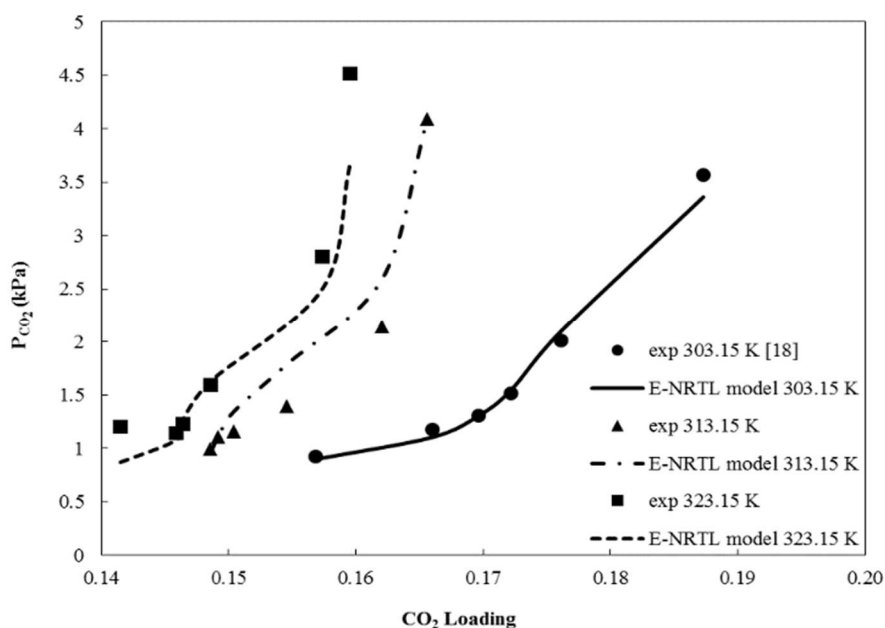


Figure 7 Comparison of calculated CO_2 partial pressure by E-NRTL model with experimental data of CO_2 - K_2CO_3 -(MDEA+DEA)- H_2O system at 303.15-323.15 K.

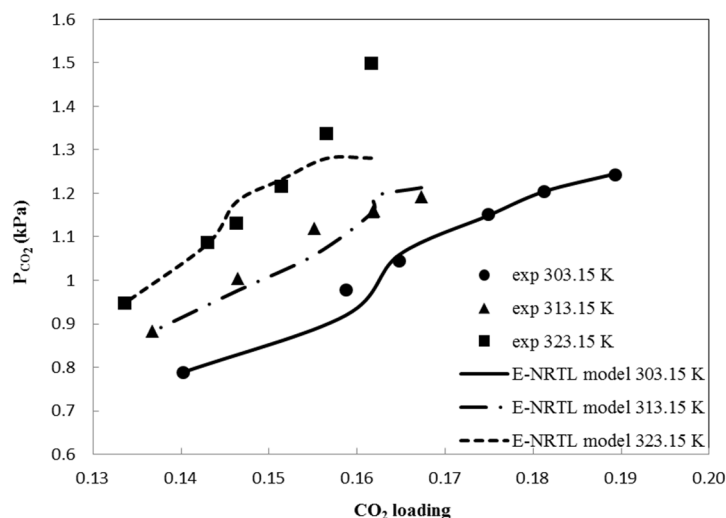


Figure 8 Comparison of calculated CO₂ partial pressure by E-NRTL model with experimental data of CO₂-K₂CO₃-(PZ+DEA)-H₂O system at 303.15-323.15 K.

Furthermore, it can also be seen that the mixture of MDEA-DEA as promotor enhances the partial pressure of CO₂ from 0.9 to 4.5 kPa, while the CO₂ loading ranged from 0.14 to 0.19 for any increase of MDEA concentration from 0% to 5%. On the other hand, an increase of PZ concentration decreases the CO₂ partial pressure. From 5% to 0% of PZ, the CO₂ partial pressure ranged from 0.7 to 1.5 kPa and the CO₂ loading ranged from 0.13 to 0.19 at 303.15-323.15 K.

At the same temperature and composition of the MDEA-DEA and PZ-DEA mixtures, the solubility of CO₂ in K₂CO₃-PZ-DEA-H₂O solution was higher than that in K₂CO₃-MDEA-DEA-H₂O solution. This can be seen from the Henry constant value and the CO₂ partial pressure in the CO₂-K₂CO₃-PZ-DEA-H₂O system, which are lower than that in the CO₂-K₂CO₃-MDEA-DEA-H₂O system. The partial pressure of CO₂ is at equilibrium with the composition of CO₂ dissolved in the solution. The lower the CO₂ partial pressure, the lower the amount of CO₂ dissolved. Thus, the PZ-DEA promotor is able to react with CO₂ to a higher degree than the MDEA-DEA promotor.

There are interactions between molecule-ions (cation, anion), ion-molecule, and molecule-molecule in the electrolyte solution. As shown in Tables 1 and 2, the binary interaction parameters of the E-NRTL model were obtained in this study by fitting the experimental data and by minimizing the deviation between the calculated and the experimental CO₂ partial pressures as listed in Eq. (4).

Table 1 Binary interaction parameters of the E-NRTL model for CO₂-K₂CO₃-MDEA-DEA-H₂O system.

Interaction Pair	A	B
H ₂ O-K ⁺ ,CO ₃ ²⁻	0.2906	1581.9477
K ⁺ ,CO ₃ ²⁻ -H ₂ O	16.8260	-376.9776
H ₂ O-K ⁺ ,HCO ₃ ⁻	3.5466	2862.9717
K ⁺ ,HCO ₃ ⁻ -H ₂ O	1.6992	-601.0102
CO ₂ -K ⁺ ,CO ₃ ²⁻	18.1601	0.0190
K ⁺ ,CO ₃ ²⁻ -CO ₂	-3.6034	0.0020
CO ₂ -K ⁺ ,HCO ₃ ⁻	13.7406	0.0050
K ⁺ ,HCO ₃ ⁻ -CO ₂	-7.5882	0.0116
MDEA-K ⁺ ,CO ₃ ²⁻	15.9018	-0.0022
K ⁺ ,CO ₃ ²⁻ -MDEA	-16.6288	0.0080
MDEA-K ⁺ ,HCO ₃ ⁻	13.4431	0.0312
K ⁺ ,HCO ₃ ⁻ -MDEA	-9.9209	-0.0119
DEA-K ⁺ ,CO ₃ ²⁻	14.2215	0.0017
K ⁺ ,CO ₃ ²⁻ -DEA	-49.7068	-0.0265
DEA-K ⁺ ,HCO ₃ ⁻	18.1363	0.00003
K ⁺ ,HCO ₃ ⁻ -DEA	-32.0727	0.0032
CO ₂ -H ₂ O	27.6063	-8428.9780
H ₂ O-CO ₂	-3.9847	1080.0234
H ₂ O-MDEA	38.5937	-1547.9046
MDEA-H ₂ O	8.4030	-1029.9708
MDEA-CO ₂	6.9470	0.0222
CO ₂ -MDEA	-0.0013	0.0003
H ₂ O-DEA	110.9578	1317.9671
DEA-H ₂ O	8.2146	-718.0496
DEA-CO ₂	-4.0545	-0.0053
CO ₂ -DEA	19.0643	0.0992
DEA-MDEA	4.3455	0.0154
MDEA-DEA	15.7693	0.0505

Table 2 Binary interaction parameters of the E-NRTL model for CO₂-K₂CO₃-PZ-DEA-H₂O system.

Interaction Pair	A	B
H ₂ O-K ⁺ ,CO ₃ ²⁻	6.5868	1582.0180
K ⁺ ,CO ₃ ²⁻ -H ₂ O	22.0015	-376.9981
H ₂ O-K ⁺ ,HCO ₃ ⁻	13.4615	2862.9924
K ⁺ ,HCO ₃ ⁻ -H ₂ O	-2.3622	-600.9386
CO ₂ -K ⁺ ,CO ₃ ²⁻	11.9452	-0.0003
K ⁺ ,CO ₃ ²⁻ -CO ₂	6.9734	0.0043
CO ₂ -K ⁺ ,HCO ₃ ⁻	12.4738	-0.0118
K ⁺ ,HCO ₃ ⁻ -CO ₂	18.0367	0.0053
PZ-K ⁺ ,CO ₃ ²⁻	21.8881	0.0056
K ⁺ ,CO ₃ ²⁻ -PZ	-1.9255	-0.0031
PZ-K ⁺ ,HCO ₃ ⁻	15.9018	0.0148
K ⁺ ,HCO ₃ ⁻ -PZ	-6.9958	0.0035
DEA-K ⁺ ,CO ₃ ²⁻	12.1837	-0.0010
K ⁺ ,CO ₃ ²⁻ -DEA	-9.3069	-0.0008
DEA-K ⁺ ,HCO ₃ ⁻	13.9665	0.0038
K ⁺ ,HCO ₃ ⁻ -DEA	-3.4174	0.0007
CO ₂ -H ₂ O	31.7369	-8428.9770
H ₂ O-CO ₂	-2.3121	1080.0703
H ₂ O-PZ	-8.0646	-0.0233
PZ-H ₂ O	-1.3528	-0.0209
PZ-CO ₂	4.7064	0.0182
CO ₂ -PZ	-0.0003	0.0003
H ₂ O-DEA	-6.5097	1317.6078
DEA-H ₂ O	1.4480	-718.0867
DEA-CO ₂	-3.4001	-0.0127
CO ₂ -DEA	3.5859	0.0116
DEA-PZ	-0.3741	-0.0009
PZ-DEA	-2.5949	-0.0080

4 Conclusions

The physical solubility of CO₂ in K₂CO₃ solution with a mixture of amines had the greatest value in the composition of 30% K₂CO₃, 5% PZ and 0% DEA at 303.15 K, while the Henry constant of CO₂ in this solution had the lowest value. An increase in CO₂ partial pressure increased the value of CO₂ loading. The solubility of CO₂ decreased with an increase in temperature. In a mixed solution of K₂CO₃ with MDEA-DEA promotor, any increase in MDEA concentration from 0% to 5% increased the partial pressure of CO₂ from 0.9 to 4.5 kPa, while the CO₂ loading ranged from 0.14 to 0.19. Otherwise, the CO₂ partial pressure decreased with an increase in PZ concentration. From 5% to 0% of PZ concentration, the CO₂ partial pressure ranged from 0.7 to 1.5 kPa and the CO₂ loading ranged from 0.13 to 0.19 at 303.15-323.15 K. The E-NRTL model can correlate well the experimental data. The binary interaction parameters of the E-NRTL model were also obtained in this study.

Acknowledgements

The authors are grateful for the financial support provided by PNBP ITS, through grant no. 038839.28/IT2.11/PN.01.00/2014.

References

- [1] Figueroa, J.D., Fout, T., Plasynski, S., McIlvried, H. & Srivastava, R.D., *Advances in CO₂ Capture Technology-The U.S. Department of Energy's Carbon Sequestration Program*, Int. Journal of Greenhouse Gas Control, **2**, pp. 9-20, 2008.
- [2] Burck, J., Marten, F. & Bals, C., *The Climate Change Performance Index Results 2015*, Germanwatch & Climate Action Network, Bonn, Germany, Europe, 2014.
- [3] Rao, A.B. & Rubin, E.S., *A Technical, Economic, and Environmental Assessment of Amine-Based CO₂ Capture Technology for Power Plant Greenhouse Gas Control*, Environ. Sci. Tech., **36**(20), pp. 4467-4475, 2002.
- [4] Cullinane, J.T., *Thermodynamics and Kinetics of Aqueous Piperazine with Potassium Carbonate for Carbon Dioxide Absorption*, Dissertation, University of Texas, Austin, United States, 2005.
- [5] Austgen, D.M., Rochelle, G.T., Peng, X. & Chen, C.C., *Model of Vapor-Liquid Equilibria for Aqueous Acid Gas-Alkanolamine Systems using the Electrolyte-NRTL Equation*, Ind. Eng. Chem. Res., **28**(7), pp. 1060-1073, 1989.
- [6] Liu, Y., Zhang, L. & Watanasiri, S., *Representing Vapor-Liquid Equilibrium for an Aqueous MEA- CO₂*, Ind. Eng. Chem. Res., **38**(5), pp. 2080-2090, 1999.

- [7] Park, H.S., Lee, K.B., Hyun, J.C. & Kim, S.H., *Correlation and Prediction of the Solubility of Carbon Dioxide in Aqueous Alkanolamine and Mixed Alkanolamine Solutions*, Ind. Eng. Chem. Res., **41**(6), 1658-1665, 2002.
- [8] Chung, P-Y., Soriano, A.N., Leron, R.B. & Li, M-H., *Equilibrium Solubility of Carbondioxide in the Amine Solvent System of (Triethanolamine+Piperazine+Water)*, J. Chem. Thermodynamics, **42**(6), pp. 802-807, 2010.
- [9] Kamalpour, S. & Mehablia, A., *Thermodynamics of CO₂-MDEA using eNRTL with Differential Evolution Algorithm*, International Journal of Thermodynamics, **15**(3), pp. 157-168, 2012.
- [10] Haimour, N. & Sandall, O.C., *Absorption of Carbon Dioxide into Aqueous Methyldiethanolamine*, Chem. Eng. Science, **39**(12), pp. 1791-1796, 1984.
- [11] Clarke, J.K.A., *Kinetics of Absorption of Carbon Dioxide In Monoethanolamine Solutions at Short Contact Times*, Ind. Eng. Chem. Fundamental, **3**(3), pp. 239-245, 1964.
- [12] Savage, D.W., Sartori, G. & Astarita, G., *Amines as Rate Promoters for Carbon Dioxide Hydrolysis*, Faraday Discuss, Chem. Soc., **77**, pp.17-31, 1984.
- [13] Cullinane, J.T. & Rochelle, G.T., *Carbon Dioxide Absorption with Aqueous Potassium Carbonate Promoted by Piperazine*, Chem.Eng. Sci., **59**(17), pp.3619-3630, 2004.
- [14] Rahimpour, M.R. & Kashkooli, A.Z., *Enhanced Carbon Dioxide Removal by Promoted Hot Potassium Carbonate in a Split-Flow Absorber*, Chem. Eng. Proc., **43**(7), pp. 857-865, 2004.
- [15] Al-Ghawas, H.A., Hagewiesche, D.P., Ruiz-Ibanez, G. & Sandall, O.C., *Physicochemical Properties Important for Carbon Dioxide Absorption in Aqueous Methyldiethanolamine*, J. Chem. Eng. Data, **34**(4), pp. 385-391, 1989.
- [16] Altway, S., Kuswandi, Zulfetra, I. & Nuharani, F., *Experiment and Correlation of CO₂ Solubility in Electrolyte Solution of K₂CO₃-(MDEA+DEA)-H₂O*, Proceeding of International Seminar Chemical Engineering in Minerals and Materials Processing in conjunction with Seminar Teknik Kimia Soehadi Reksowardojo, Bandung, Indonesia, 2014.
- [17] Tourneux, D.L., Iliuta, I., Iliuta, M.C., Fradette, S. & Larachi, F., *Solubility of Carbon Dioxide in Aqueous Solutions of 2-Amino-2-Hydroxymethyl-1,3-Propanediol*, Fluid Phase Equilib., **268**, pp. 121-129, 2008.
- [18] Chen, C.C., *A Segment-Based Local Composition Model for the Gibbs Energy of Polymer Solutions*, Fluid Phase Equilib., **83**, pp. 301-312, 1993.

- [19] Pitzer, K.S., *Electrolytes: From Dilute Solutions to Fused Salts*, J. Am. Chem. Soc., **102**(9), pp. 2902-2906, 1980.
- [20] Versteeg, G.F. & van Swaaij, W.P.M., *Solubility and Diffusivity of Acid Gases (CO_2 , N_2O) in Aqueous Alkanolamine Solutions*, J. Chem. Eng. Data, **33**(1), pp. 29-34, 1988.
- [21] Li, M.H. & Lai, M.D., *Solubility and Diffusivity of N_2O and CO_2 in (Monoethanolamine + N-Methyldiethanolamine + Water) and in (Monoethanolamine + 2-Amino-2-methyl-1-propanol + Water)*, J. Chem. Eng. Data, **40**(2), pp. 486-492, 1995.
- [22] Austgen, D.M., Rochelle, G.T. & Chen, C.C., *Model of Vapor Liquid Equilibria for Aqueous Acid Gas-alkanolamine Systems. 2. Representation of H_2S and CO_2 Solubility in Aqueous MDEA and CO_2 Solubility in Aqueous Mixtures of MDEA with MEA or DEA*, Ind. Eng. Chem. Res., **30**(3), pp. 543-555, 1991.