



## Conference Paper

# Phototransformation of Linear Alkylbenzene Sulphonate (LAS) Surfactant Using ZnO-CuO Composite Photocatalyst

Rahadian Zainul<sup>1</sup>, Jon Effendi<sup>2</sup>, and Mashuri Mashuri<sup>1</sup><sup>1</sup>Physical Chemistry Laboratory, Universitas Negeri Padang, Indonesia<sup>2</sup>Inorganic Chemistry Laboratory, Universitas Negeri Padang, Indonesia

## Abstract

The aim of this study was to observe the effect of composition ratio of precursor and mass of ZnO-CuO for photodegradation of Linear Alkylbenzene Sulphonate. Material synthesis is done by solid stated process. The ZnO-CuO composite was characterized using DRS-UV and FTIR. The percentage of degradation was obtained from the absorbance value measured using a UV-Vis spectrophotometer. The ZnO-CuO composite photodegradation activity in 2: 1 ratio was 54.71% for 105 minutes irradiation. The degradation percentage of ZnO-CuO composites have higher photocatalytic activity than single ZnO (53.64 %) and CuO (52.21 %) semiconductors in degrading LAS.

**Keywords:** phototransformation, surfactant, LAS, composite, ZnO-CuO

Corresponding Author:

Rahadian Zainul

rahadianzmsiphd@yahoo.com

Received: 19 February 2019

Accepted: 5 March 2019

Published: 16 April 2019

Publishing services provided by  
Knowledge E

© Rahadian Zainul et al. This article is distributed under the terms of the [Creative Commons Attribution License](#), which permits unrestricted use and redistribution provided that the original author and source are credited.

Selection and Peer-review under the responsibility of the ICBSA Conference Committee.

## 1. Introduction

Detergent is a cleaning material commonly used by industrial or household businesses. Detergent production continues to increase every year for cleaning agents. Detergent is a combination of various compounds where the main component of the compound is surface active agents or surfactants. The most commonly used detergent surfactant is LAS or Linear Alkylbenzene Sulphonate.

LAS is an alkyl aryl sulphonate which has a branchless straight chain structure, a benzene ring and a sulphonate. LAS is the conversion of Alkylbenzene sulphonate or ABS, where LAS is more easily degraded in water and is a detergent 'soft'. Detergent waste is one of the pollutants that can endanger the lives of organisms in the waters because it causes the supply of oxygen from the air to be very slow, due to the foam that covers the surface of the water.

Many technological methods are used to overcome this waste problem, such as chlorination, biodegradation and ozonation methods [1]. This method requires operational

## OPEN ACCESS

costs that are quite expensive so that it is less effective to be applied in Indonesia [2]. One method that is relatively inexpensive and easily applied in Indonesia, namely photodegradation. the principle is to use photocatalysts derived from semiconductor materials, such as  $\text{TiO}_2$ ,  $\text{ZnO}$  [3].

The application of photocatalysts as waste degradation agents has been widely carried out. The application of  $\text{ZnO}$  as a transformation of humic acid with the help of UV light [4, 5]. Application in water splitting and as a promoter of the formation of electrical energy through visible light conversion techniques and water splitting [6, 7].

Zinc oxide semiconductors ( $\text{ZnO}$ ) are the best alternative choices after  $\text{TiO}_2$  semiconductors in their application as photocatalysts. The basic consideration is that the  $\text{ZnO}$  semiconductor is resistant to corrosion, has gap energy ( $E_g = 3.2$  to  $3.5$  eV), and is much cheaper than  $\text{TiO}_2$ . so that  $\text{ZnO}$  can be activated with UV (ultraviolet) radiation which results in low photocatalytic efficiency of  $\text{ZnO}$  in visible light. Increasing  $\text{ZnO}$  photocatalytic activity in visible light can be done by reducing  $\text{ZnO}$  energy bandgap by adding another semiconductor that has a narrow bandgap.  $\text{ZnO}$  incorporation has been carried out with other metal oxides and sulfides such as  $\text{TiO}_2$ ,  $\text{SnO}_2$ ,  $\text{WO}_3$ ,  $\text{NiO}$ ,  $\text{Fe}_2\text{O}_3$ , and  $\text{CuO}$  [8-12]. Copper (II) oxide ( $\text{CuO}$ ) was chosen because it is stable at the atmosphere, stable to light, low cost, and can cause a shift in absorption of  $\text{ZnO}$  in the direction of visible light.  $\text{CuO}$  bandgap is  $1.2$  eV [12-15].

Preparation of  $\text{ZnO}$ - $\text{CuO}$  nano-composites can be done by several methods including solid chemical synthesis method, coprecipitation, sol gel, and sonochemistry (sonochemistry). Sonochemical method (Ultrasonic Irradiation) is used to synthesize  $\text{ZnO}$ - $\text{CuO}$  nanocomposites because it has several advantages such as cheap, fast, easy to control size, low reaction temperature and the resulting particles have high homogeneity. Nanomaterial synthesis using sonochemical method is carried out using ultrasonic waves [16-19].

This research will be conducted to produce  $\text{ZnO}$ - $\text{CuO}$  composites which have high photocatalytic efficiency in visible light regions, compared to  $\text{ZnO}$  and  $\text{CuO}$  semiconductors. In this research, LAS compounds will be degraded with  $\text{ZnO}$ - $\text{CuO}$  composites to be able to be activated under visible light and reduce recombination reactions. This research will use LAS compounds as raw materials,  $\text{ZnO}$ - $\text{CuO}$  composite catalysts. The results of this study were analyzed using UV-vis spectrophotometer and the parameters measured were LAS concentration before and after the photocatalyst process.

## 2. Experimental Section

### 2.1. Tools and materials

The tools used in this study are UV/Vis Spectrophotometer, Photocatalyst Box consisting of UV lamps and magnetic stirrer Selecta Multimatic brands, Ultrasonic (45 Hz) Ultrasonic Cleaner 968 brands, X-Ray diffraction (XRD), Fourier Infrared Transfers (FTIR), centrifuge, Oven brand Xu 225 France Etuves, Neycraft brand furnace, Kern brand analytical balance, and glass equipment: measuring flask, beaker, dropper pipette and stirring rod. The material used in this study is zinc acetate dihydrate  $\text{Zn}(\text{CH}_3\text{COO})_2 \cdot 2\text{H}_2\text{O}$  (Merck),  $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$  (Merck), KOH (Merck), ethanol, cetyltrimethylammonium bromide (CTAB, Merck), linear powder alkylbenzen sulphonate (LAS) (Merck), ZnO (Merck), CuO (Merck) and aquades.

### 2.2. Procedure

#### 2.2.1. ZnO-CuO catalyst synthesis

Mixed with 0.160 g  $\text{Zn}(\text{CH}_3\text{COO})_2 \cdot 2\text{H}_2\text{O}$ , 0.2497 g  $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$ , 0.5611 g KOH and 0.1093 g CTAB dissolved with distilled water to a volume of 30 mL solution. Then it was sterilized for 15 minutes. The mixture was heated at a temperature of 50°C and ultrasound at a frequency of 45 Hz for one hour. The mixture was then centrifuged at a speed of 5000 rpm for 10 minutes, the filtrate was removed. The precipitate was washed with 30 mL of distilled water and 20 mL of absolute ethanol. The precipitate was dried in an oven at 120°C for 2 hours. Calcined at 50°C for 5 hours, by raising the temperature slowly from 200 for 30 minutes, 300 for 45 minutes, and temperature 400 for 60 minutes. The same procedure is also done by varying the ratio of the precursor composition, namely  $\text{Zn}(\text{CH}_3\text{COO})_2 \cdot 2\text{H}_2\text{O}$ :  $\text{CuSO}_4$  (2:1, 3:1, 4:1, 5:1) [20].

#### 2.2.2. Sampel preparation

As much as 1 g of LAS surfactant were weighed, then diluted with distilled water to 1 L (1000 ppm). Then 10 ml of mother liquor was taken (1000 ppm) and diluted with distilled water to 1 L (10 ppm). The sample solution will be used in this study is a LAS solution with a concentration of 10 ppm.

### 2.2.3. Characterization of ZnO-CuO catalyst

Characterization using UV-DRS was carried out to calculate the value of the full ZnO-CuO catalyst. Then it was characterized by FTIR instrument which aims to find out the information on the location of the oxide peak in the resulting ZnO-CuO catalyst.

### 2.2.4. Test of photocatalytic activity for LAS degradation

#### Determination of precursor comparison and ZnO-CuO catalyst optimum mass

40 mL of LAS solution containing 10 ppm and added 10 mg of ZnO-CuO catalyst. then irradiated with a UV lamp for 2 hours while being distributed. Then the solution was centrifuged at 5000 rpm for 10 minutes and the filtrate was separated. The absorbance of the filtrate was determined using a UV-Vis spectrophotometer at a wavelength of 200-300 nm. The same procedure was carried out for the addition of 20, 30, 40, 50, 60 mg of ZnO-CuO catalyst (2: 1, 3: 1, 4: 1, 5: 1).

#### Determination of optimum radiation time

40 mL of LAS solution containing 10 ppm LAS and added catalyst x mg ZnO-CuO (x = optimum concentration) then cycled with UV light with a time variation of 75, 90, 105, 120, 135 and 150 minutes while being sterilized. Then the solution was centrifuged at 5000 rpm for 10 minutes and the filtrate was separated. The absorbance of the filtrate was determined using a UV-Vis spectrophotometer at a wavelength of 200-300 nm.

#### Determination of the effect of catalyst types

40 mL of LAS solution containing 10 ppm LAS and added with catalyst x mg ZnO-CuO (x = optimum concentration) then irradiated with a UV lamp for t minutes while being distributed. Then the solution was centrifuged at 5000 rpm for 10 minutes and the filtrate was separated. The absorbance of the filtrate was determined using a UV-Vis spectrophotometer at a wavelength of 200-300 nm. The same procedure is also performed using ZnO and CuO catalysts. Then the optimum ZnO-CuO catalyst with different conditions without distrirer, and without irradiation [21].

### 3. Results and Discussion

Analysis using UV-DRS was only carried out on pure ZnO samples and the ZnO-CuO catalyst was synthesized, namely ZnO-CuO 2: 1 which is the maximum ZnO-CuO catalyst sample seen from the results of LAS phototransformation as shown in Fig. 5. From the sample test, % reflectance to wavelength. The data obtained will be processed to obtain an estimate of the band gap value of each sample. Where from the results obtained it can be seen how the effect of pure ZnO with synthesis catalyst is ZnO-CuO 2: 1 on the band gap energy of each sample. The band gap graph of ZnO and ZnO-CuO 2: 1 is shown in Fig. 1.

Band gap values from semiconductors can be calculated using the Kubelka-Munk theory. Band gap values of ZnO and ZnO-CuO 2: 1 are calculated from reflectance spectra. Based on Fig. 1, it can be seen that the band gap values obtained for ZnO  $\sim 3.25$  eV and ZnO-CuO 2: 1  $\sim 2.75$  eV. This shows that with the addition of another semiconductor, CuO on ZnO catalyst can reduce the band gap value. The small band gap value obtained in ZnO-CuO 2: 1. This makes the photocatalytic activity more effective than other ZnO, CuO and ZnO-CuO composites.


From Fig. 3, it can be seen that the incorporation of ZnO with CuO which has a narrow bandgap can reduce the ZnO bandgap itself so that the absorption of ZnO shifts to the visible light region.

In this study, FTIR analysis was carried out in pure ZnO catalyst samples, pure CuO as a comparison standard for the synthesis catalyst samples, ZnO-CuO. FTIR spectra of ZnO-CuO catalyst can be seen in Fig. 4.

From Fig. 4, it can be seen that the synthesis catalyst ZnO-CuO 2: 1 shows that a new absorption band is formed which shows the stretching vibration of ZnO-CuO composite metal oxide, while there is no other comparison formed ZnO-CuO Composite but only vibrations are formed. CuO peak stretch. This is because the relative molecular period of Zn is greater than Cu which results in the formation of CuO peaks. in the wave number range 400-600 nm is the area of stretching of metal oxide oxide absorption.

ZnO-CuO composites synthesized by different precursor comparison were tested for photocatalytic activity for LAS phototransformation. Fig. 5 shows that several comparisons of the percentage of ZnO-CuO composite catalysts from the results of phototransformation of LAS were carried out.


Comparison of precursor composition also affects the photocatalytic activity of ZnO-CuO composites. The photocatalytic activity of ZnO-CuO composites synthesized by

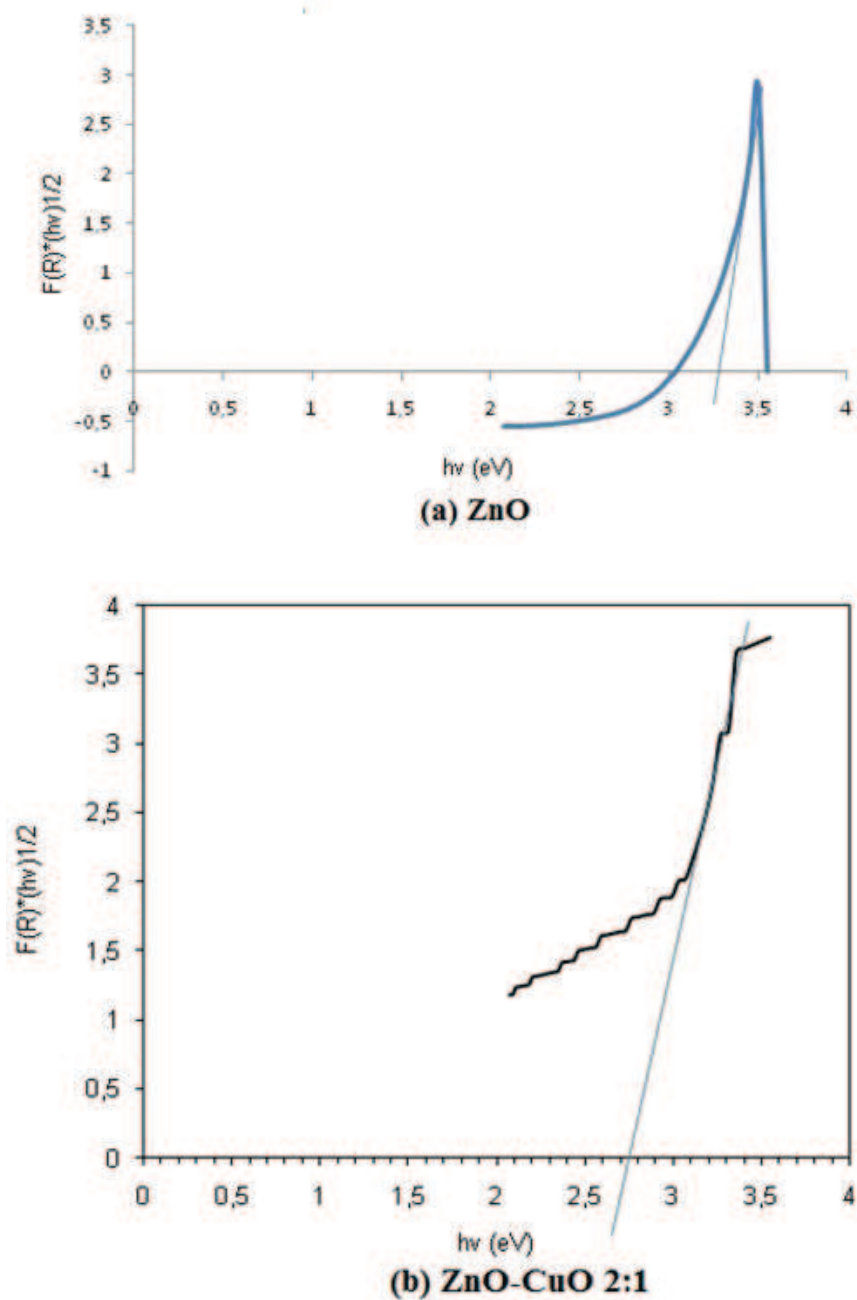


**Figure 1:** Graph of band gap values (a) ZnO, (b) ZnO-CuO 2: 1 using UV-DRS.

the ratio of Zn  $(\text{CH}_3\text{COO})_2 \cdot 2\text{H}_2\text{O}:\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$  2: 1 precursors was higher, ie 54.71% compared (1: 1, 3: 1, 4: 1, 5: 1) to Phototransformation of LAS.

The amount of ZnO-CuO 2:1 composite catalyst as much as 40 mg in 40 ml of 10 ppm LAS solution becomes the saturation point or optimum conditions for the photocatalytic activity of ZnO-CuO 2:1 composite (Fig. 6). Larger precursor compositions cause higher levels of saturation of the solution so that the crystalline nucleus is formed too quickly

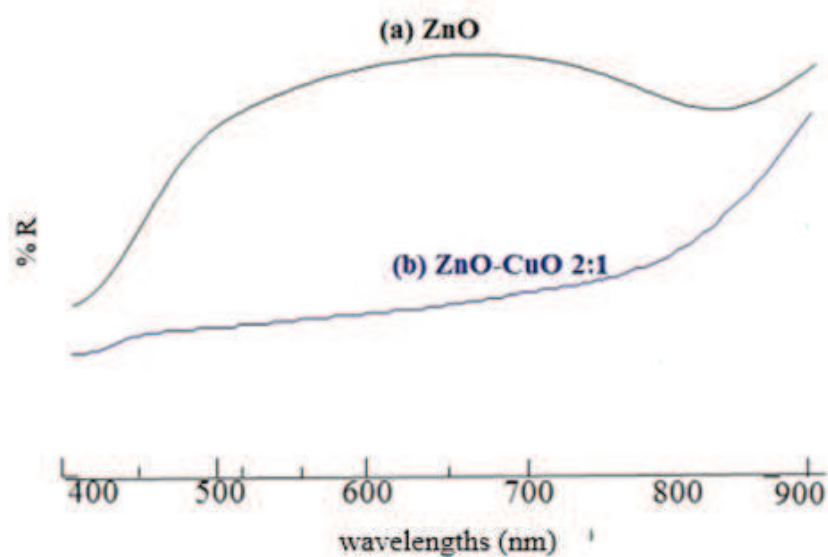


**Figure 2:** Reflectant spectra of catalysts: (a) ZnO, and (b) ZnO-CuO 2: 1 from UV-DRS Spectrophotometer.

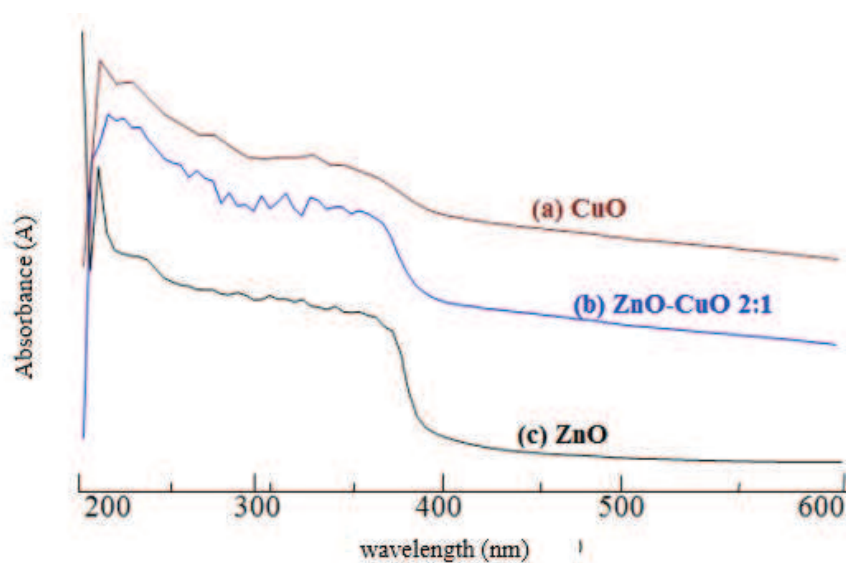

**Figure 3:** Spectral Absorbance of (a) CuO, (b) ZnO-CuO 2: 1 and ZnO Catalysts from UV-DRS Spectrophotometers.

so that the particle size will be greater because of the agglomeration of the formed crystal nucleus.

The crystal growth process will be different from and without surfactants. Cetyltrimethylammonium bromide (CTAB) surfactant can cause the surface tension between two liquids to decrease so that the energy needed to form a new phase will be smaller. CTAB is a cationic surfactant that will be fully ionized in water.

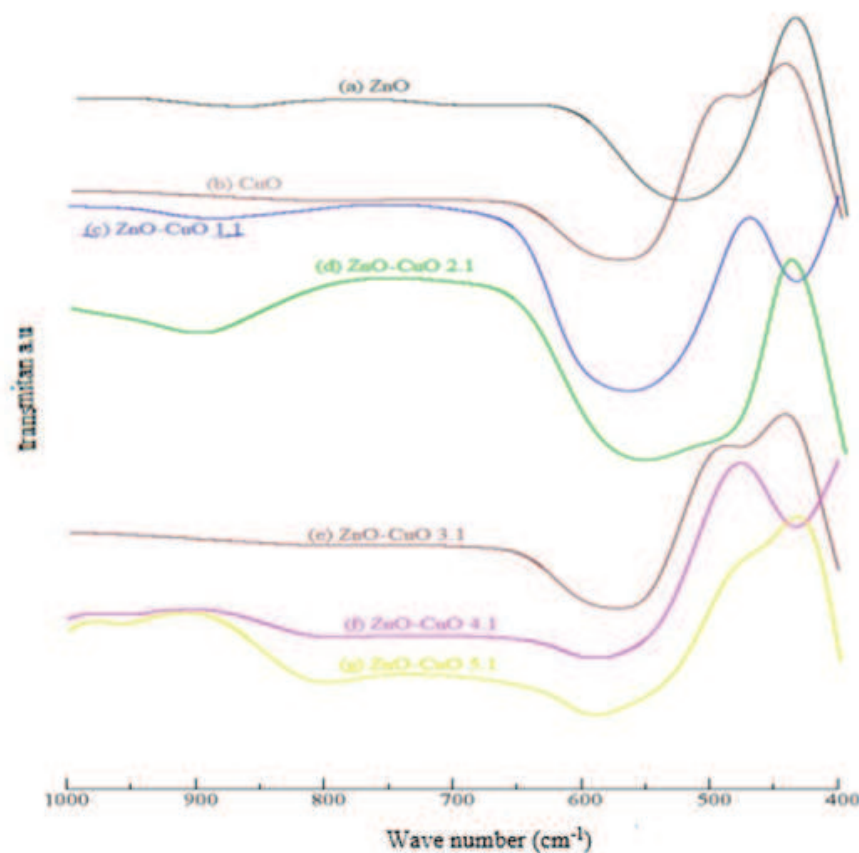


**Figure 4:** FTIR spectra of (a) ZnO, (b) CuO, (c) ZnO-CuO 1.1, (d) ZnO-CuO 2.1, (e) ZnO-CuO 3.1, (f) ZnO-CuO 4.1, (g) ZnO-CuO 5.1.


The calcination process carried out on the synthesis of ZnO-CuO composites increased its photocatalytic activity. This increase in photocatalytic activity is caused by the decomposition of CTAB surfactants and the formation of crystals more completely when calcination occurs. Crystal structures predominantly affect semiconductor photocatalytic activity compared to morphology, particle size, and size dispersion [13, 14].

Fig. 7 shows that the percentage of degradation of the LAS solution. ZnO-CuO shows a higher percentage than ZnO and CuO because CuO which is composited with ZnO can reduce bandgap energy. in CuO recombination ( $e^-$ ) and ( $h^+$ ) occur quickly. The incorporation of CuO with ZnO causes recombination time ( $e^-$ ) and ( $h^+$ ) to be slowed because of the transfer of charge between the two, namely  $h^+$  on ZnO will be transferred to CuO and  $e^-$  in CuO will be transferred to ZnO (Zhang., 2010). This causes the availability of sufficient time for LAS to be adsorbed on the surface of the ZnO-CuO catalyst so that the photocatalytic activity is highest compared to the single ZnO and CuO semiconductors.



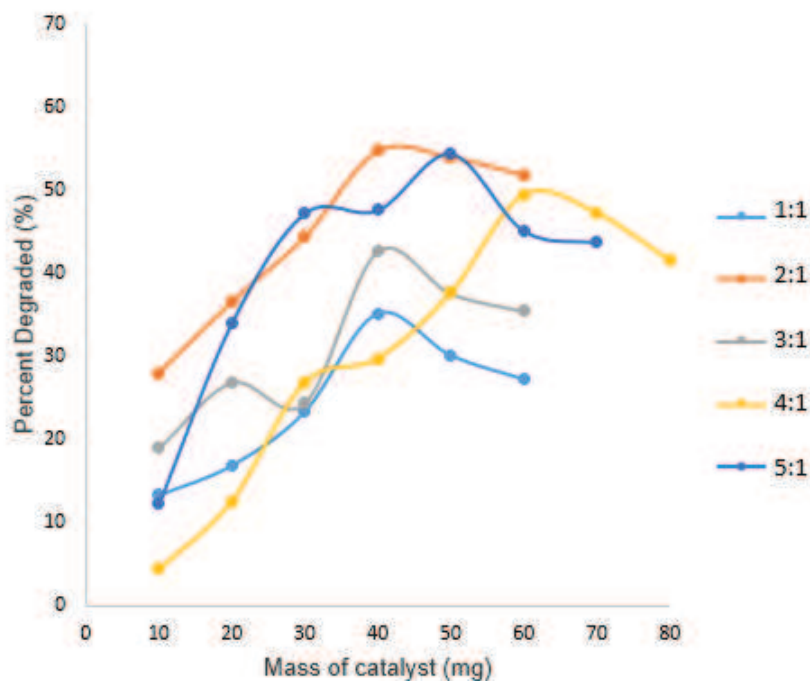


**Figure 5:** LAS degradation using variation of comparison of ZnO:CuO catalysts.

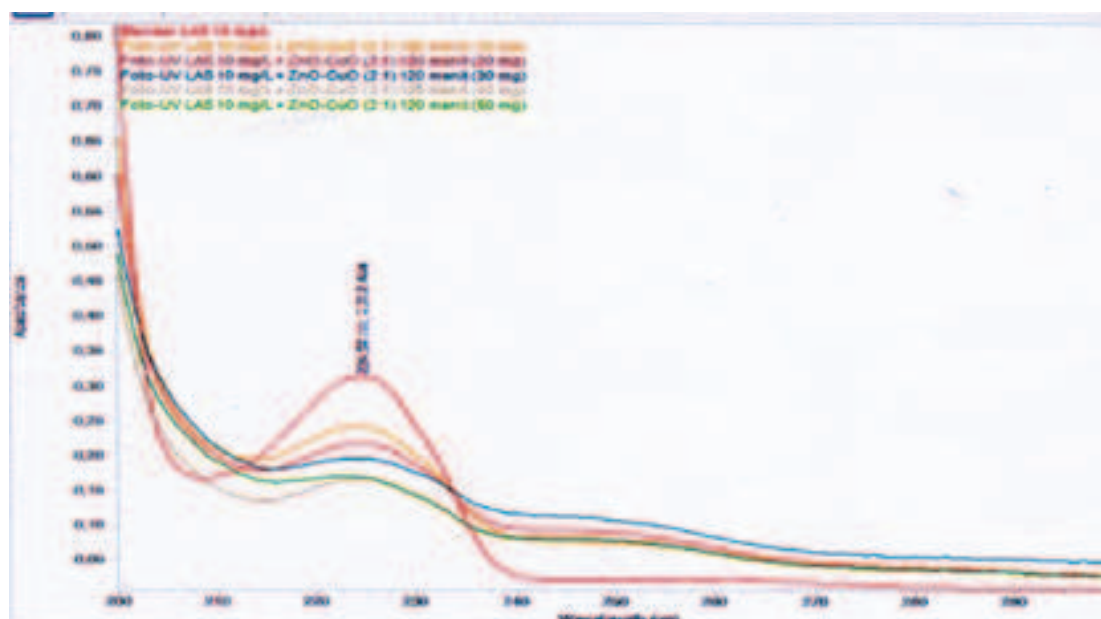


**Figure 6:** Spectrum of UV-vis spectrophotometer from 10 ppm LAS phototransformation results with ZnO-CuO 2:1 catalyst.

In the photocatalytic activity test, the ZnO-CuO catalyst was carried out on the optimum catalyst mass of 40 mg and the optimum time of irradiation was 105 minutes, where control was performed to see the possible effects of irradiation and stirring on LAS phototransformation. From the measurement results can be seen in the form of bar

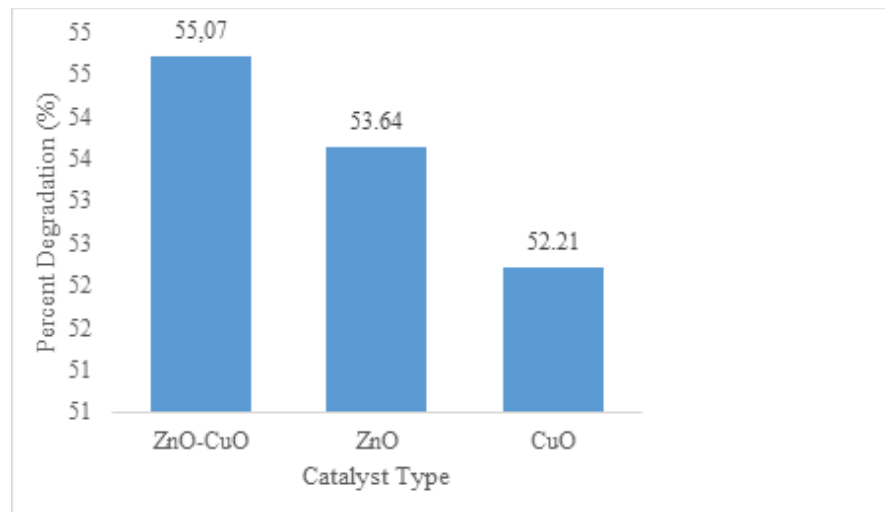

**Figure 7:** Effect of catalyst types on the percentage of LAS phototransformation.

charts (Fig. 8) which shows that the effect of irradiation and stirring greatly affects the photocatalytic activity of the ZnO-CuO catalyst in the LAS phototransformation process.

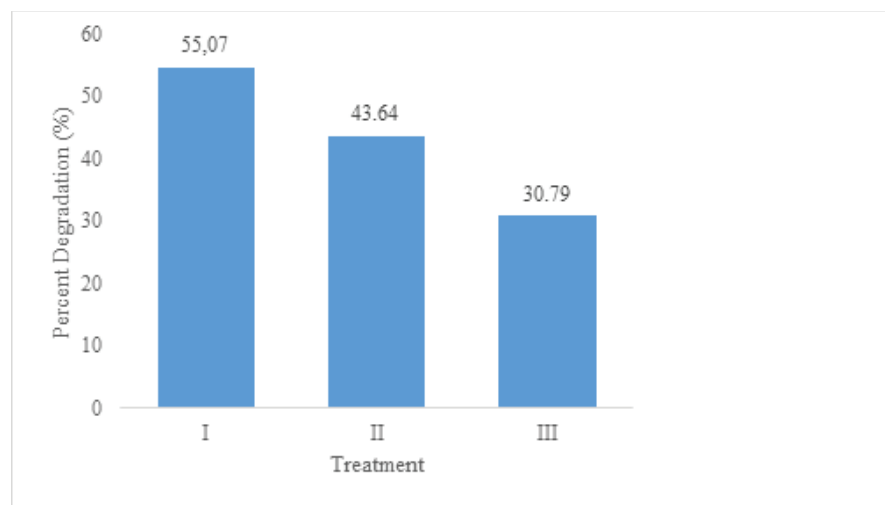

**Figure 8:** LAS phototransformation process with various treatments. Treatment I: optimum conditions (10 ppm LAS + 40 mg ZnO-CuO irradiated while stirring for 105 minutes; b. Treatment II: 10 ppm LAS + 40 mg ZnO-CuO irradiated for 105 minutes without stirring; c. Treatment III: 10 ppm LAS + 40 mg ZnO-CuO was stirred for 105 minutes without irradiation.

LAS phototransformation still occurs even without irradiation, this is because electron mobility still occurs even in dark conditions, the influence of room temperature can also induce photoconduction on the surface of the catalyst [20].

## 4. Conclusion

Based on the results of research that has been done, it can be concluded that the percentage of LAS degradation is higher in the precursor 2: 1 ratio of 54.71% with the

optimum catalyst mass of 40 mg. The optimum time of copying for LAS degradation is at 105 minutes with a catalyst mass of 40 mg. The photocatalytic activity of ZnO-CuO catalyst is higher in the percentage of degradation than the single ZnO and CuO semiconductors.

## Acknowledgement

Thank you the Government of the Republic of Indonesia, Ministry of Technology, Research and Higher Education on the Research Grand of Riset Unggulan Perguruan Tinggi in 2018-2019. Special thanks to the Rector of the Universitas Negeri Padang, has been facilitated and funded for Terapan Research in 2018, and Chemical Laboratory of Universitas Negeri Padang. Thanks to the research team of UNP Chemistry undergraduate students and the Research Team from Zainul for Advanced Material Processing (ZAMP).

## References

- [1] Zulkarnain Chaidir, Desi Nurakbari, Marniati Salim, Zainul R 2016 Optimization of *Spirulina Platensis* Culture for Antioxidant Production, *Der Pharmacia Lettre* 8 73-78
- [2] I. F, Sugiharto E, Wijaya K, Tahir I, Kamalia 2006 Titanium Oxide Dispered On Natural Zeolite (TiO<sub>2</sub>/Zeolite) And Its Application For Congo Red Photodegradation, *Indonesian Journal of Chemistry* 6 8-42
- [3] Sakthivel S, Neppolian B, Shankar V, Arabindoo B, Palanichamy M, Murugesen V 2003 Solar Photocatalytic Degradation of Azo Dye Comparison of Photocatalytic Efficiency of ZnO and TiO<sub>2</sub>, *Sol. Energy Mater. Sol. C* 77 65-82
- [4] Zainul R 2016 Effect of Temperature and Particle Motion Against the Ability of ZnO Semiconductor Photocatalyst in Humic Acid *Der Pharmacia Lettre* 8 pp. 120-124
- [5] Zainul R 2016 Determination of the Half-Life and the Quantum Yield of ZnO Semiconductor Photocatalyst in Humic Acid *Der Pharmacia Lettre* 8 pp. 176-179
- [6] Zainul R 2016 Design and Modification of Copper Oxide Electrodes for Improving Conversion Coefficient Indoor Lights (PV-Cell) Photocells *Der Pharma Chemica* 8 pp. 388-395
- [7] Zainul R, Alif A, Aziz H, Arief S, Darajat S 2015 Modifikasi dan Karakteristik I-V Sel Fotovoltaik Cu<sub>2</sub>O/Cu-Gel Na<sub>2</sub>SO<sub>4</sub> Melalui Iluminasi Lampu Neon, *Eksakta Berkala Ilmiah Bidang MIPA* 15 50-56

- [8] An T, Liu X, Hu X, Sheng G, Fu J, Zhang M 2010 Preparation of a High-Activity ZnO/TiO<sub>2</sub> Photocatalyst via Homogeneous Hydrolysis with Low Temperature Crystallization Method, *Materials Journal Letters* 64 1883-1886
- [9] Kowsari E, Ghezelbash M 2012 Ionic Liquid-Assisted Facile Synthesis of ZnO/SnO<sub>2</sub> Nanocomposites and Investigation of Their Photocatalytic Activity, *Journal of Material Letters* 68 17-20
- [10] Y. C, Kai Y, Qing S, Jimmy Y, Fangfang C, Xin L 2011 Preparation of WO<sub>3</sub>/ZnO Composite photocatalyst and Its Photocatalytic Performance, *Chines Journal and Catalysis* 32555-565 555-565
- [11] Dm F, W.Hechenleitner, Silva M, Lima M, Bittencourt P, R.Silva, Melo M C, Pineda E 2009 Preparation and characterization of NiO, Fe<sub>2</sub>O<sub>3</sub>, Ni<sub>0.04</sub>Zn<sub>0.96</sub>O and Fe<sub>0.03</sub>Zn<sub>0.97</sub>O, *Journal of Nano Materials*. 118: 447-452 118 447-452
- [12] Li B, Y.Wang Facile Synthesis and Photocatalytic Activity of ZnO-CuO Nanocomposite, *Journal of Superlattices Microstructures* 47 615-623
- [13] Shouqiang W, S., Ma. Y C Y, Shao Z 2010 Fabrication of CuO/ZnO Composite Films with Cathodic co-Electrodeposition and Their Photocatalytic Performance, *Journal of Molecules and Catalysis* 331 112-116
- [14] Liu Z, J.C.Deng., J.J.Deng, F.F.Li. 2008 Fabrication and Photocatalysis of CuO/ZnO Nano-Composites via a New Method *Journal of Material Science and Engineering, Journal of Material Science and Engineering* 150 99-104
- [15] Sathishkumar P, Sweena. R, Wu. J J, Anandan S 2011 Synthesis of CuO-ZnO Nanophotocatalyst for Visible Light Assisted Degradation of a Textile Dye in Aqueous Solution, *Journal of Chemistry. Engineering* 171 136-140
- [16] Wongpisutpaisan, N. P C, N.Vittayakorn, W.Pecharapa 2011 Sonochemical Synthesis and Characterization of Copper Oxide Nanoparticles, *Journal of Energy Procedia* 9 404-409
- [17] Wei Y, Chang P 2008 Characteristics of Nano Zinc Oxide Synthesized Under Ultrasonic Condition, *Journal of Physics and Chemistry of Solids* 69 688-692
- [18] Xiao Q, Huang S, J.Zhang, C.Xiao, X.Tan 2008 Sonochemical Synthesis of ZnO Nanosheet, *Journal of Alloy Compound* 459 L18-L22
- [19] Kas R, O.Birer 2012 Sonochemical Shape Control of Copper Hydroxysulfates, *Journal of Ultrasound and Sonochemistry* 19 692–700
- [20] Kasuma N Y 2012 Penggunaan Komposit Zno-Cuo Yang Disintesis Secara Sonochemistry Yang Digunakan Sebagai Katalis Untuk Fotodegradasi Metil Orange Dan Zat Antibakteri, Tesis. Padang FMIPA Universitas Andalas

- [21] Sanjaya H 2009 Fotodegradasi Sufaktan Linear Alkil Sulfonat (LAS) Menggunakan Sinar UV 254 nm Dengan Bantuan Semikonduktor ZnO Sebagai Fotokatalis, Laboratorium Kimia Lingkungan Program Studi Kimia Universitas Andalas